

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-00611-00-00
Spot: SENE Sec/Twnshp/Rge: 8-30S-8W
4290 feet from S Section Line, 330 feet from E Section Line
Lease Name: EVANS B Well #: 2
County: KINGMAN Total Vertical Depth: 4320 feet

Operator License No.: 34357
Op Name: ATLAS OPERATING LLC
Address: 15603 KUYKENDAHL, STE 200
HOUSTON, TX 77090

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4230		
PROD	5.5	4317	1390	100 SX
SURF	8.625	292		175 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/23/2013 8:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: (620) 532-9461

Proposed Plugging Method: CIBP 4100', 35 SX 1300', 35 SX 850', CIRC 342'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/23/2013 9:30 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

PACKER ON TUBING STUCK IN HOLE. SHOT TUBING AT 4006' & SPOTTED 50 SKS OF CEMENT & 200 LB HULLS. PULLED TUBING AND LAYED OUT. PULL 1390' & 5 1/2" CASING. RAN TUBING BACK IN TO 1300' & SPOTTED 35 SX CEMENT. PULLED TUBING TO 800' SPOTTED 35 SX CEMENT. WAITED 1 1/2 TO TAG 800' PLUG NOT IN PLACE. PUMPED AS FOLLOWS. 150# HULLS, 50 SKS CEMENT, NO PLUG, 10 GEL-500# HULLS 25 SX CMT, NO PLUG. 2 GEL 200# HULLS 25 SX CEMENT, NO PLUG. 8 GEL 800' HULLS 25 SX CEMENT NO PLUG. 1 GEL 200# HULL 50 SX CEMENT TAGGED PLUG AT 640'. PULLED TUBING TO 340' & CIRC'D CEMENT TO SURFACE WITH 165 SX CEMENT.

Perfs:


Top	Bot	Thru	Comments
4232	4252	CSG	
4216	4220	CSG	
4196	4200	CSG	
4166	4180	CSG	

Remarks: QUALITY WELL SERVICE - COMMON CEMENT WITH CACL & GILSOMITE

Plugged through: TBG

District: 02

Signed

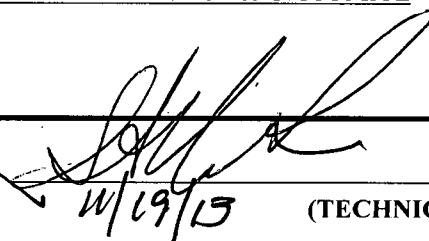

(TECHNICIAN)

KCC WICHITA

OCT 29 2013

Form CP-2/3

RECEIVED

