

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: License # 5050
Name Hummon Corporation
Address 400 One Main Place
City/State/Zip Wichita, KS 67202

Operator Contact Person Wilber Berg
Phone 263-8521

Contractor: License # 5148
Name Big-H Drilling, Inc

Wellsite Geologist Tim Pierce
Phone 263-8521

PURCHASER Getty Trading & Transportation
Wichita, KS

Designate Type of Completion
 New Well Re-Entry Workover
 Oil SWD Temp Abd
 Gas InJ Delayed Comp.
 Dry Other (Core, Water Supply etc.)

If OWWO: old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method:
 Mud Rotary Air Rotary Cable
8-22-84 8-28-84 8-29-84
Spud Date Date Reached TD Completion Date
3850 3807'
Total Depth PBTD

Amount of Surface Pipe Set and Cemented at 224 feet

Multiple Stage Cementing Collar Used? Yes No
If yes, show depth set feet

If alternate 2 completion, cement circulated from feet depth to w/SX cmt

API NO. 15-007-21,899-0000
County Barber
150' N of
C NE NW Sec. 2 Twp. 32 Rge. 11 East West
4770 Ft North from Southeast Corner of Section
3300 Ft West from Southeast Corner of Section
(Note: Locate well in section plat below)


Lease Name Smith Well # 1-2

Field Name Chapin Ranch

Producing Formation Douglas

Elevation: Ground 1572 KB 1585

Section Plat

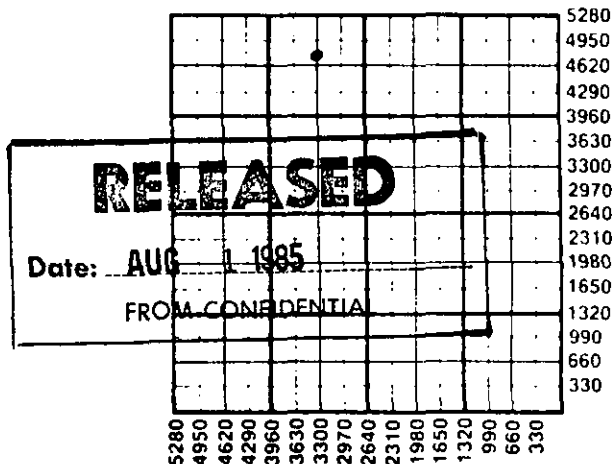

WATER SUPPLY INFORMATION

Source of Water:
Division of Water Resources Permit # T 84-560

Groundwater Ft North from Southeast Corner (Well) Ft West from Southeast Corner of Sec Twp Rge East West

Surface Water 510 Ft North from Southeast Corner (Stream, pond etc) 2500 Ft West from Southeast Corner Sec 2 Twp 32 Rge 11 East West

Other (explain) (purchased from city, R.W.D.#)

Disposition of Produced Water: Disposal Repressuring

Docket # D-23,205

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature Wilber D. Berg
Title Production Supt Date 10/3/84

SANDRA L. MENDOZA
STATE NOTARY PUBLIC for me this 3rd day of October
1984 SEDGWICK COUNTY, KANSAS
MY APPT. EXP. NOV 26 1984

Notary Public Sandra L. Mendoza
Date Commission Expires February 13, 1986

K.C.C. OFFICE USE ONLY
 Letter of Confidentiality Attached
 Wireline Log Received
 Drillers Timelog Received
Distribution
 KCC SWD/Rep NGPA
 KGS Plug Other (Specify)

State Geological Survey
WICHITA BRANCH
OCT 05 1984
10-5-84
Wichita, Kansas

CONFIDENTIAL

Operator Name Hummon Corporation Lease Name Smith Well# 1-2 SEC. 2 TWP. 32S RGE. 11 East West

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken [X] Yes [] No
Samples Sent to Geological Survey [X] Yes [] No
Cores Taken [X] Yes [] No

Formation Description [X] Log [] Sample

DST #1: 3625-3666'
OP 60-60-45-60
Strong blow thruout GTS 40 min. SIP 1033-1019
2nd OP ga. 26,000 stab. FP 83-111/195-195
Rec. 600' Clean gassy oil HP 1814-1800
60' Hvy. mud cut oil

Table with columns: Name, Top, Bottom. Rows include Onaga Sh., Tarkio, Elgin, Heebner, Snyder Sd., Dgls Lm, Dgls Sh, Lansing, LTD.

RELEASED
AUG 12 1985

DST #2: 3776-3785'
OP 45-60-60-90
Strong blow 1st OP SIP 1103-977
GTS 30 min. into 2nd OP, TSTM FP 41-41/55-55
Rec. 60' SO&GCM HP 1884-1873

Core (Continued)
3657-61 1/2 Limestone, grey, fine to med. crys
3661 1/2-63 Shale, grey
3663-65 Limestone, grey shaley

Core #1: 3607-3665'
3607-21 Sd, grey-white, fine to very fine grains. Moderately sorted, silty in parts w/fair to good show free oil & gas thruout w/sl. odor becoming spotty sat. w/lt. brown stain at base. Laminated micaceous material.
3621-22 Limestone, grey w/fine cryst. dense
3622-23 Shale, grey
3623-26 Limestone, grey w/fine cryst. dense
3626-27 Grey shale
3627-31 Limestone, grey shaley
3631-34 Grey, shale
3634-41 Limestone, grey=tan, fine cryst., fair fossil cast & vuggular porosity w/inter-cryst. domomitic porosity, good stain & odor.
3641-51 Limestone, grey dense, few spots w/sc. porosity & slight stain, no odor
3651-57 Limestone, grey, dense shaley

FROM CONFIDENTIAL

CASING RECORD [X] New [] Used

Report all strings set-conductor, surface, intermediate, production, etc.

Table with columns: Purpose of String, Size Hole, Size Casing, Weight, Setting Depth, Type of Cement, #Sacks Used, Type and Percent Additives. Rows for Surface and Production.

PERFORATION RECORD

Acid, Fracture, Shot, Cement Squeeze Record

Table with columns: Shots Per Foot, Specify Footage of Each Interval Perforated, (Amount and Kind of Material Used), Depth. Rows for 3780-3783' and 3640-3644'.

TUBING RECORD: Size 2-3/8", Set At 3703', Packer at NONE, Liner Run [] Yes [X] No w/nitrogen

Date of First Production: October 3, 1984. Producing Method: [] Flowing [X] Pumping [] Gas Lift [] Other (explain).....

Table with columns: Oil, Gas, Water, Gas-Oil Ratio, Gravity. Row for Estimated Production Per 24 Hours: 65 Bbls, 15 MCF, 15 Bbls, CFPB, 32.7°

METHOD OF COMPLETION

Production Interval

Disposition of gas: [] Vented [] Open Hole [X] Perforation [] Sold [] Other (Specify) 3640 - 3644 [X] Used on Lease [] Dually Completed [] Commingled