

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber County, Sec. 29 Twp. 39 S Rge. 12 (W) (W) 30
C NE NE

Location as "NE/CNW/SW" or footage from lines
Lease Owner Nat'l Gal & Oil Co / Sierra Petroleum Co., - Contr.

Lease Name LILLIEQUIST Well No. 1

Office Address 1009 Central Bldg., Wichita, Ks / 208 Pet Bldg., Wichita, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) dry

Date well completed 6/15/58 19

Application for plugging filed 6/14/58 19

Application for plugging approved 6/14/58 19


Plugging commenced 6/15/58 19

Plugging completed 6/15/58 19

Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

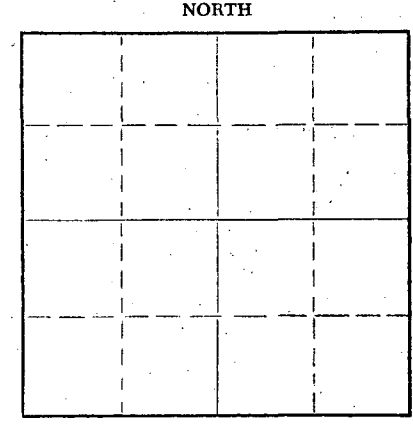

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. M. A. Rives - Pratt

Producing formation Depth to top Bottom Total Depth of Well 4588 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	318	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGING RECORD

Filled hole with heavy mud from 4588 up to 310'. Set bridge with 1/3 sack hulls, wood plug and 25 sacks cement through drill pipe. Filled hole up to 35' with heavy mud set bridge with 1/3 sacks hulls, wood plug and 10 sacks cement to cellar 0. Job complete 6:30 a.m. 6/15/58

RECEIVED
STATE CORPORATION COMMISSION

JUN 18 1958

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sierra Petroleum Co., Inc.
Address 208 Petroleum Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
C. T. Honaker (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. T. Honaker

(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of June, 1958

Margie Cooper

Notary Public.

My commission expires 1-30-61.

PLUGGING
FILE SEC 29 T 30 R 12W
BOOK PAGE 108 LINE 32

Natural Gas & Oil Co - Owner

Sierra Petroleum co., Inc. - Contr.

LILLIEQUIST #1

C NE NE Sec. 29-30S-12W
Barber County, Kansas

Total Depth: 4588'

Elev: 1674 KB

Comm: 5/28/58
Comp: 6/15/58

Casings:

10 3/4" @ 318'

with 300 sacks Sunset Cement

FORMATION	DEPTH
Sand	30
Sand & shale	80
Red Rock	250
Shale	318
Shale & shells	445
Shale	920
Shale & shells	1260
Shale & salt	1375
Shale & lime	2570
Shale	2725
Shale, lime & shells	2910
Shale & lime	3628
Lime, shale & sand	3749
Lime	3789
Shale & lime	3893
Lime	4239
Chert & shale	4340
Shale & lime	4512
Chert & lime	4540
Shale & chert	4563
Sand & shale	4588
Tops: Mississippi	4239
Kinderhook	4345
Viola	4452
Simpson	4563

STATE OF KANSAS)
) ss:
COUNTY OF RUSSELL)

I hereby certify that the above information is true and correct to the best of my knowledge.

C. P. Hencker

Subscribed and sworn to before me this 17th day of June, 1958.

Margie Cooper
Notary Public

My commission expires: 1-30-61.

RECEIVED
STATE CORPORATION COMMISSION

JUN 18 1958

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC. 29 T. 30 R. 12W
BOOK PAGE 108 LINE 32