

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 15 Twp. 30S Rge. 11W (E) (W)

Location as "NE/CNW%SW%" or footage from lines c NW NE

Lease Owner E. K. Edmiston

Lease Name FERREL Well No. -1-

Office Address First National Bank Building, Wichita, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed December 31, 1966 19

Application for plugging filed December 30, 1966 19

Application for plugging approved December 30, 1966 19


Plugging commenced December 31, 1966 19

Plugging completed December 31, 1966 19

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production -- 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

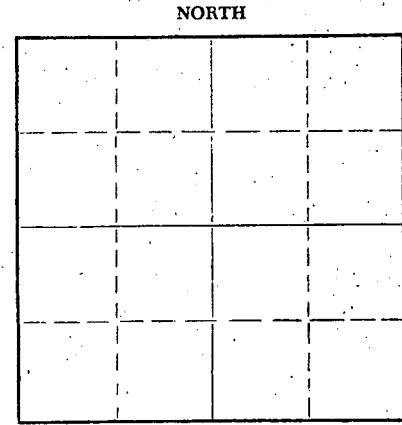

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie V. Elving

Producing formation none Depth to top Bottom Total Depth of Well 4865 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	245'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

plug hole with 25 sacks cement at 240', mud to 40',  
plugged with 10 sacks, job completed at 2:30 a.m.

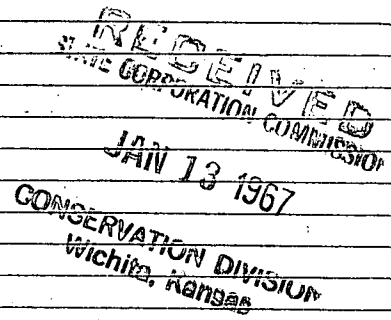


Name of Plugging Contractor E. K. Edmiston Drilling Co., Inc.  
Address First National Bank Building, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK  
E. K. Edmiston, ss.  
(If additional description is necessary, use BACK of this sheet)  
I, E. K. Edmiston, (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. K. Edmiston  
First National Bank Bldg., Wichita, Ks.  
(Address)

Subscribed and Sworn to before me this 12th day of January, 1967

My commission expires August 25, 1968



A. B. Bargen  
Notary Public.

DRILLER'S LOG

Company: E. K. Edmiston  
 425 First National Bank Building  
 Wichita, Kansas 67202

Rotary Drilling Commenced: December 16, 1966

Rotary Drilling Completed: December 31, 1966

Well Name: FERREL No. 1  
 c NW NE 15-30S-11W  
 Barber County, Kansas

Contractor: E. K. Edmiston Drilling Co., Inc.  
 425 First National Bank Building  
 Wichita, Kansas 67202

Casing Record: 245' of 8-5/8" with 200 sacks cement


LOG

Measurements from top of Kelly bushing

Sand and Shale	0 - 245
Red Bed Shale	792
Shale and Shells	1365
Shale with Lime Streaks	1635
Lime and Shale	1860
Lime	2072
Lime and Shale	2606
Shale and Lime	2934
Lime and Shale	3314
Shale and Lime	3592
Lime and Shale	3685
(not identified)	3767
Shale and Lime	3826
Lime	4050
Lime and Shale	4077
Lime	4245
Lime	4395
(not identified)	4433
Lime and Shale	4480
(not identified)	4555
Shale and Lime	4657
Lime	4865 RTD

RECEIVED  
 STATE CORPORATION COMMISSION  
 JAN 13 1967  
 CONSERVATION DIVISION  
 Wichita, Kansas

The undersigned, E. K. EDMISTON, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.


E. K. EDMISTON DRILLING CO., INC.  
  
 By \_\_\_\_\_  
 E. K. Edmiston, President

STATE OF KANSAS,  
 SS:  
 SEDGWICK COUNTY,

BE IT REMEMBERED that on this 12th day of January, 1967, before me, the undersigned, a notary public in and for said county and state, came E. K. EDMISTON, known to me to be the same person who executed the foregoing instrument as President and on behalf of the E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company.

... see reverse side of page for continuation of acknowledgment

IN WITNESS WHEREOF, I have hereunto set my hand and official seal  
on the day and year last above written.

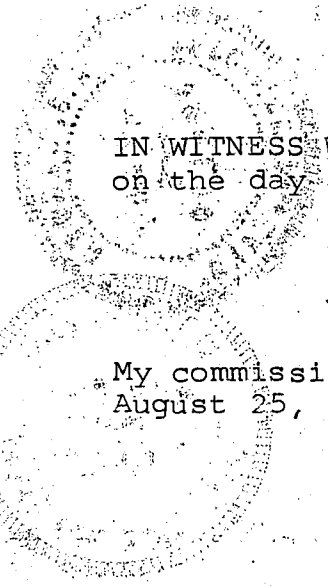  
A. B. Barga  
A. B. Barga, Notary Public

My commission expires  
August 25, 1968