


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

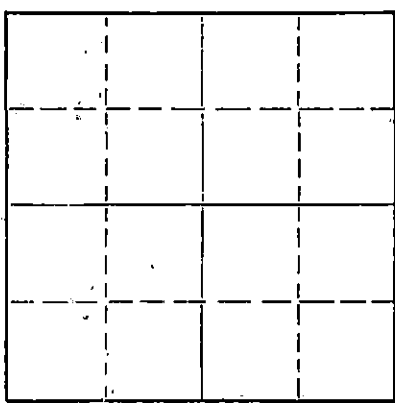

Kingman County, Sec. 26 Twp. 29 Rge. 7 (E) (W)
Location as "NE/CNW/SW" or footage from lines SW NW NE
Lease Owner Drillers Production Company
Lease Name Bett #1 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 11/2/71 19
Plugging completed 11/4/71 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4157' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	261	none
				5 1/2"	4143'	3499'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, sanded hole to 4125' and set 5 sacks of cement.
Loaded casing with water, shot pipe at 3530', 3429', 3334', pulled 40 joints, pulled 70 joints more. Loaded floor, set 20' rock bridge at 260' and ran 4 yards ready mix. Tallied pipe.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
NOV 22 1971
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY, INC.
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Rice, ss. Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas
(Address)

Subscribed and sworn to before me this 15th day of November, 1971
MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires Feb. 15, 1975

Margaret Melcher
Notary Public.

15-095-00722-0000

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY


508 East Murdock, Wichita, Kansas

Company- DRILLERS PRODUCTION CO.
Farm- Bett No. 1

SEC. 26 T. 29 R. 7W
SW NW NE

Total Depth. 4153'
Comm. 8-29-58 Comp. 9-19-58
Shot or Treated.
Contractor. Gabbert-Jones Drlg.
Issued. 4-29-61

County Kingman
KANSAS



CASING:
8 5/8" 261' cem w/225 sx.
5 1/2" 4143' cem w/100 sx.

Elevation. 1534' RB

Production. 105 BOPD

Figures Indicate Bottom of Formations.

shale & shells	905
lime & shale	1355
lime	1682
lime & shale	2535
shale	2565
shale & shells	2730
lime & shale	3169
shale	3235
sand	3290
lime	3900
lime & shale	4124
lime	4153
Total Depth	

TOPS: SCOUT	
Heebner	3081
Toronto	3094
Douglas Shale	3116
Douglas Sand	3234
Lansing Lime	3312
Base Kansas City	3827
Mississippi Chert	4120
Mississippi Lime	4151

RECEIVED
STATE CORPORATION COMMISSION
OCT 27 1971
CONSERVATION DIVISION
Wichita, Kansas