


15-095-00976-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

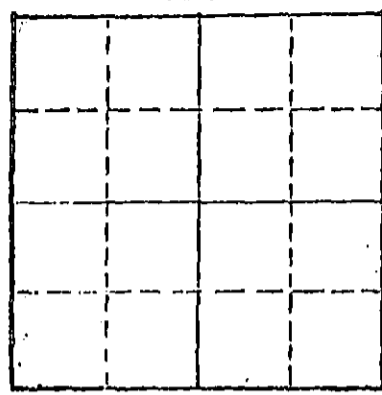

Locate well correctly on above Section Plot

Kingman County, Sec. 26 Twp. 29 Rgs. 7 (E) (W)
Location as "NE/CNW/KSW" or footage from lines SW SW NE
Lease Owner: Drillers Production Company
Lease Name: Bett #2 Well No.
Office Address: Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 1/11/74 19
Plugging completed 1/17/74 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4185 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	282	none
				5 1/2	4122	3530'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4185', ran sand to 49 4100' and ran 5 sacks cement.
Shot pipe at 3801', 3713', 3604', 3519', pulled 108 joints. Set 10' rock bridge at 200' and ran 35 sacks cement. Filled hole, set 10' rock bridge at 40' and ran 10 sacks cement. Tallied pipe.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
JAN 30 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor: KNIGHT CASING PULLING CO., INC.
Address: CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
CHASE, KANSAS (Address)

Subscribed and Sworn to before me this 18th day of January 1974.

My commission expires
MARGARET I. ELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

[Signature]
Notary Public.

15-095-00976-0000

GABBERT-JONES DRILLING CO., INC.

WICHITA, KANSAS

DRILLER'S WELL LOG

BETT #2
SW SW NE SECTION 26-29S-7W
KINGMAN COUNTY, KANSAS
OPERATOR - DRILLER'S PRODUCTION CO., INC.

COMMENCED 10-23-58
COMPLETED 11-4-58

DEPTH		FORMATION	REMARKS
FROM	TO		
0	130	RED BED	
130	249	RED BED & SHALE	
249	282	SHALE	RAN 285.79' OF 8 5/8" CASING CEMENTED @ 282' WITH 225 SACKS CEMENT.
282	750	SHALE & SHELLS	
750	815	SALT & SHALE	
815	895	SHALE & SHELLS	
895	1180	ANHYDRITE	
1180	1375	SHALE & SHELLS	
1375	3185	SHALE & LIME	
3185	3265	SAND	
3265	3800	LIME	
3800	4030	LIME & SHALE	
4030	4095	SHALE & SHELLS	
4095	4151	LIME	
4151	TD		RAN 137 JOINTS OF 5 1/2" CASING, CEMENTED @ 4122' WITH 100 SACKS CEMENT.

RECEIVED
STATE CORPORATION COMMISSION
DEC 7 1973
CONSERVATION DIVISION
Wichita, Kansas

I, E. E. HALL, CERTIFY THIS IS A TRUE AND CORRECT COPY OF THE DRILLER'S WELL LOG FOR THE BETT #2 WELL.

E. E. Hall

STATE OF KANSAS)
COUNTY OF SEDGWICK) 99

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC, WITHIN AND FOR SAID COUNTY AND STATE, ON THIS 6TH DAY OF NOVEMBER, 1958 PERSONALLY APPEARED E. E. HALL TO ME PERSONALLY KNOWN TO BE THE IDENTICAL PERSON WHO EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED FOR THE USES AND PURPOSES THEREIN SET FORTH.

IN WITNESS WHEREOF, I HAVE HEREUNTO SET MY HAND AND OFFICIAL SEAL THE DAY AND YEAR LAST ABOVE WRITTEN.

MY COMMISSION EXPIRES September 3, 1962 Catherine Foster

15-095-00976-0000


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- DRILLERS PRODUCTION CO.
Farm- Bett No. 2

SEC. 26 T. 29 R.7W
SW SW NE

Total Depth. 4151'
Comm. 10-23-58 Comp. 11-9-58
Shot or Treated.
Contractor. Gabbert-Jones Drig.
Issued. 4-29-61

County Kingman
KANSAS



CASING:
8 5/8" 282' cem w/225 sx.
5 1/2" 4122' cem w/100 sx.

Elevation. 1516' RB

Production. 118 BOPD & 10% Wtr.

Figures Indicate Bottom of Formations.

red bed	130
red bed & shale	249
shale	282
shale & shells	750
salt & shale	815
shale & shells	895
Anhydrite	1180
shale & shells	1375
shale & lime	3185
sand	3265
lime	3800
lime & shale	4030
shale & shells	4095
lime	4151 RTD
Total Depth	

TOPS:	
Heebner Shale	3061
Douglas Sand	3187
Lansing Lime	3294
Base Kansas City	3810
Mississippi Chert	4096
Mississippi Lime	4114

RECEIVED
STATE CORPORATION COMMISSION
OCT 27 1971
CONSERVATION DIVISION
Wichita, Kansas