


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

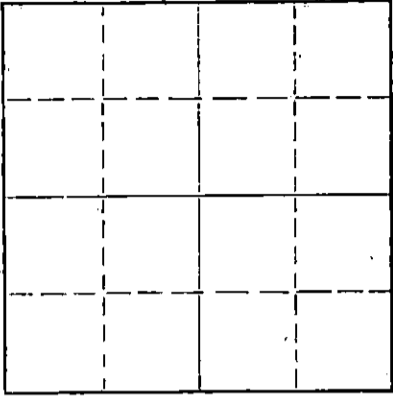

Locate well correctly on above Section Plat

Morton County, Sec. 20 Twp. 33 Rge. (E) 43 (W)
Location as "NE/CNW/SW" or footage from lines 330' N & 330' S of Ctr.
Lease Owner Cities Service Oil Company
Lease Name Sharp "C" Well No. 1
Office Address Box 1028, Guymon, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed April 21, 1953
Application for plugging filed August 8, 1963
Application for plugging approved August 8, 1963
Plugging commenced July 20, 1963
Plugging completed July 28, 1963
Reason for abandonment of well or producing formation Water logged, unable to produce

If a producing well is abandoned, date of last production September 1962
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh E. Scott
Producing formation Topeka Depth to top 2910 Bottom 2994 Total Depth of Well 3438 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Topeka	Water	2910	2994	8 5/8"	360'	NONE
				5 1/2"	3436'	802'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set cement plug at 2810' with 15 sacks common cement from 2810' - 2930'. Shot 5 1/2" casing at 802'. Recovered 36 joints, spotted 30 sacks common cement at 360' and 10 sacks in top of surface casing to 4' of ground level at which point the 8 5/8" casing was cut off and a steel cap welded on.

RECEIVED
STATE CORPORATION COMMISSION

AUG 9 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Daco, Lease & Well Service
Address 1700 South Main, Borger, Texas

STATE OF OKLAHOMA, COUNTY OF TEXAS, ss.
H. E. Massey (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. E. Massey
Dist. Supt. Box 1028, Guymon, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of August, 1963

My commission expires 5-4-66

Gloyd L. Shockley
Notary Public

INVOICED
DATE 8/9/63
INV. NO. 2552-W