


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission,
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

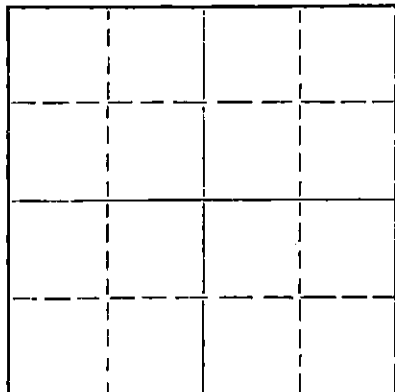

Locate well correctly on above
Section Plat

Morton County. Sec. 34 Twp. 33S Rge. (E) 43 (W)
Location as "NE/CNW/SW" or footage from lines 1300' N & 2600' W of E line
Lease Owner Cities Service Oil Co.
Lease Name Fletcher "D" Well No. 1
Office Address Box 1028, Guymon, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 3-8 19 55
Application for plugging filed 6-14 19 66
Application for plugging approved 6-15 19 66
Plugging commenced 6-17 19 66
Plugging completed 6-22 19 66
Reason for abandonment of well or producing formation Well logged off with
saltwater
If a producing well is abandoned, date of last production 12-22 19 65
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar Eyes
Producing formation Topeka Depth to top 2908 Bottom 3046 Total Depth of Well 3180 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FRDM	TD	SIZE	PUT IN	PULLED OUT
<u>Topeka</u>	<u>water</u>	<u>2908</u>	<u>3046</u>	<u>8 5/8"</u>	<u>600'</u>	<u>None</u>
				<u>5 1/2"</u>	<u>3174'</u>	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Spotted 25 sxs. of common cement from 2793' to 3006', shot 5 1/2" casing @ 1401' & 1115', pulled casing to 650' & spotted 35 sxs. of cement from 550' to 650', finished pulling 5 1/2" casing. Spotted 10 sxs. of cement from 30' to 4' of ground level at which point the 8 5/8" casing was cut off and a steel cap welded on.

RECEIVED
STATE CORPORATION COMMISSION

JUN 23 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Daco Lease & Well Service
Address 1700 South Main, Borger, Texas

STATE OF OKLAHOMA, COUNTY OF TEXAS, ss.
I. H. E. Massey (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. E. Massey - Dist. Supt.

Box 1028, Guymon, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of June, 1966

My commission expires 5-4-70
Gloyd L. Shockley Notary Public.