

15-007-00344-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

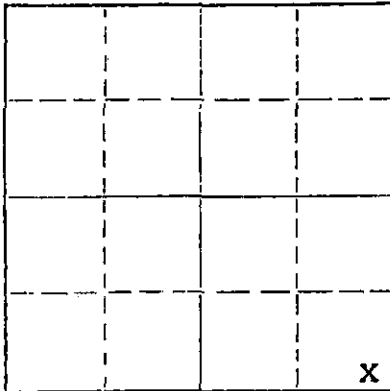

Locate well correctly on above  
Section Plat

Barber County, Sec. 6 Twp. 34S Rge. (E) 11 (W)  
Location as "NE/CNWSW" or footage from lines SE SE SE

Lease Owner Clarke Corporation

Lease Name Bevans Well No. 1

Office Address Box 187, Medicine Lodge, Kansas 67104

Character of Well (completed as Oil, Gas or Dry Hole) Oil and Gas

Date well completed January 12 19 57

Application for plugging filed March 14 19 74

Application for plugging approved March 18 19 74

Plugging commenced March 20 19 74

Plugging completed March 28 1 P.M. 19 74

Reason for abandonment of well or producing formation

Not productive

If a producing well is abandoned, date of last production March 19, 19 74

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein

Producing formation Mississippi Depth to top 4550 Bottom 4620 Total Depth of Well 4732 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	285	None
				5 1/2	4728	2806

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sand From 4730 to 4550

5 sacks of cement From 4550 to 4465

Ripped pipe at 3200, 3100, 3000, 2900, and 2806

Built wood bridge at 200 feet.

Rock from 200 to 190 feet.

3 yards of Ready Mix to surface.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 1 1974  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Clarke Corporation

Address Box 187, Medicine Lodge, Kansas 67104

STATE OF Kansas, COUNTY OF Barber, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Elmer P. McGehee*

Medicine Lodge, Kansas 67104

(Address)

Subscribed and Sworn to before me this 30th day of March, 1974

*Jessie Hamilton*  
Notary Public.

