

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Barber County, Sec. 5 Twp. 34 Rge. (E) 11 (W)

Location as "NE/CNW/SW" or footage from lines C NW SW

Lease Owner Francis Oil & Gas, Inc.

Lease Name Geo. Groendyke Well No. 1

Office Address 513 E. 3rd, Ellinwood, Kansas 67526

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed \_\_\_\_\_ 19 \_\_\_\_\_

Application for plugging filed May 26 19 70

Application for plugging approved \_\_\_\_\_ 19 \_\_\_\_\_


Plugging commenced May 27 19 70

Plugging completed June 5 19 70

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

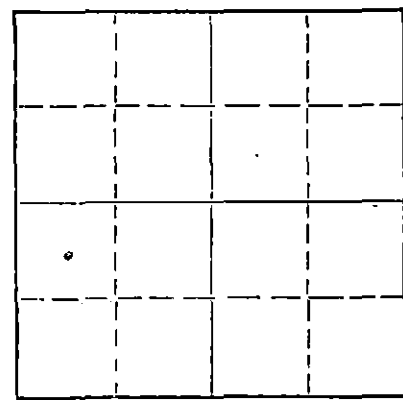

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4634 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	223'	8 5/8"	223'	none
		0	4630'	5 1/2"	4630'	3602.39'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it to the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed plug to 3800' and dumped 5 sacks of cement.

Squeezed well with 100 sacks of cement and 15 sacks of gel mud.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 10 1970  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor PIPE PULLERS, INC.  
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Evelyn Roth (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth  
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 9th day of June, 19 70

My commission expires July 7, 1972 [Signature] Notary Public.

KANSAS GEOLOGICAL SOCIETY BUILDING  
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Francis Oil and Gas Inc.

FARM Groendycke, <sup>Geo.</sup> ~~Geo.~~ No. 1

SEC. 5 T. 34 R. 11  
LOG. 100'W & 50'N of  
NW/4-SW/4

TOTAL DEPTH 4634'  
COMM. 5/4/57 COMP. 5/20/57  
SHOT OR TREATED  
CONTRACTOR Armer Inc.  
ISSUED

COUNTY Barber  
KANSAS  


CASING  
20 10  
15 8 223'  
12 6  
13 5 4630'

ELEVATION 1406 G.F.  
1408 D.F.  
1411 K.B.  
PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Top Soil and Red Rock	75
Red Bed Shale and Shells	745
Shale and Shells	1360
Shale and Lime	1790
Lime	1870
Lime and Shale	2675
Shale	2970
Shale and Lime	3065
Lime	3460
Shale and Lime	3665
Shale	3770
Shale and Lime	3840
Lime	3910
Lime and Shale	4010
Lime	4105
Lime and Shale	4180
Lime	4295
Lime and Chert	4314
Lime	4410
Lime and Shale	4442
Lime	4525
Lime and Chat	4559
Mississippi Chat	4600
Cherty Lime	4634
Total Depth	4634

FORMATION TOPS:

TOP BROWN LIME	3833
LANSING	3840
BASE KANSAS CITY	4143
MISSISSIPPI	4514
T. D.	4634

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

Armer Inc.  
By R. C. Spending

STATE OF KANSAS  
COUNTY OF SEDGWICK

Subscribed and sworn to before me, a notary public, in and for said County and State this 22nd day of May, 1957.

Rose Toney  
Notary Public

My Commission expires February 13, 1960.