

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Ness County, Sec. 36 Twp. 29 Rge. 7 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW SE NW

Lease Owner Pickrell Drlg. Co., Wichita, Kans. 67202

Lease Name Coykendall Well No. # 2

Office Address 705 Fourth National Bank Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed October 10 19 62

Application for plugging filed January 5 19 71

Application for plugging approved January 5 19 71


Plugging commenced January 6 19 71

Plugging completed January 7 19 71

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production December 21 19 70

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

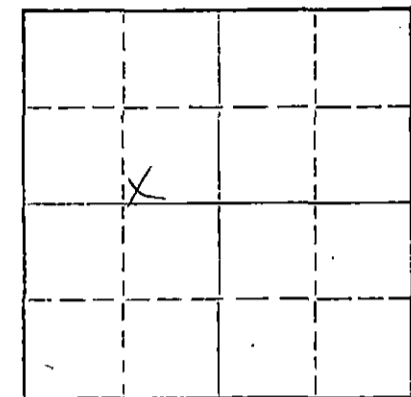

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Russell Biberstein

Producing formation Mississippian Depth to top 4090 Bottom 4133 Total Depth of Well 4190 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	210	None
				4 1/2	4190	1321

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.


- January 6, 1971 Plugged off bottom. Globe Oil Well Cementing Co. mixed and pumped down 2 1/2" tubing; 25 sx common cement to squeeze off perforations @ 4110' to 4120'. Pressured to 1500 lb. and held.
- January 7, 1971 Plugged off top. Set 10" rock bridge from 200' to 210". Filled 8 5/8" surface casing from 200' to base of cellar with 3000 lb. P.S.I. ready mix concrete.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 16 1971  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor RUSS CASING PULLING, INC. (If additional description is necessary, use BACK of this sheet)  
Address P. O. Box 1062 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Sedgwick, ss. Dale M. Robinson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale M. Robinson  
705 Fourth National Bank Bldg., Wichita, Kansas (Address)



Subscribed and sworn to before me this 15th day of February, 19 71

Esther Lamone  
Notary Public.

My commission expires January 19, 1973

15-095-00835-0000  
ROTARY DRILLING LOG

*File Copy*

COMPANY: PICKRELL DRILLING COMPANY  
 705 4th National Bank Bldg  
 Wichita 2, Kansas  
 LOCATION: Coykendall No. 2      C SW SE NW 36-29-7W  
 Kingman County, Kansas

Rotary Drilling Commenced 9-29-62  
 Rotary Drilling Completed 10-9-62

CONTRACTOR: PICKRELL DRILLING COMPANY  
 Wichita, Kansas

CASING RECORD: (8 jts) 207' 5/8" Surface Casing set with 165 sacks cement.  
 Circulated.  
 (128 jts) 4 1/2" Casing, set at 4182' with 190 sacks cement.  
 Completed 5:45 A.M. 10-10-62.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

6	Sand	<u>Circulated for Samples</u>
35	Red Rock	4100
207	Red Rock	4110
625	Red rock & Shale	4115
1170	Shale, Shell & Lime	4125
1435	Shale & Lime	4125
1645	Lime	4130
2120	Lime & Shale	4162
3387	Lime	4190
3854	Lime & Shale	
4115	Mississippian	<u>Slope Test</u>
4190	RTD - Mississippian	1500
		2500
		3500
		4000
		<u>S. L. M.</u>
		2656
		3112
		3638

RECEIVED  
 STATE CORPORATION COMMISSION  
 JAN 6 1971  
 CONSERVATION DIVISION  
 Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY  
 By C. W. Sebitts Attorney-in-Fact

STATE OF KANSAS }  
 COUNTY OF SEDGWICK } ss.:

On this 17th day of October, 19 62, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITTS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: June 21, 1966

Maxine Blackman  
 Maxine Blackman Notary Public