


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

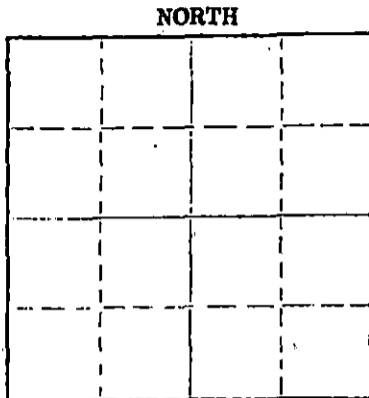

Locate well correctly on above Section Plat

Kingman County, Sec. 9 Twp. 29S Rge. 9W (E) (99)
Location as "NE/CNW/SE" or footage from lines C-SE-SE
Lease Owner Little George Oil Company
Lease Name Henning Well No. 1
Office Address 225 Sutton Place Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed December 8, 1975
Application for plugging filed verbal application 19
Application for plugging approved verbal approval 19
Plugging commenced December 8, 1975
Plugging completed December 8, 1975
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,466 ft
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	258'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4,466 feet (rotary total depth) to 250 feet. Set plug at 250 feet and cemented with 35 sxs cement. Filled hole with heavy rotary mud from 250 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 15 sxs cement, 2 sxs cement in rathole.
Plugging operations accomplished utilizing Sun Oil Well Pump Truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, INC.
Address 200 North Main Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick
Dean Britting -- Agent (owner) or (operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 North Main (Address) Wichita, Ks 67202

Subscribed and sworn to before me this 16th day of December, 1975

My commission expires June 30, 1978
Elsie Willison -- Notary Public.

RECEIVED
LEG 10 375 12-18-75

15-095-20442-0000

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Little George Oil Company**

SEC. **9** T. **29S** R. **9W**

FARM **Henning**

NO. **1**

LOC. **C-SE-SE**

COUNTY **Kingman**

TOTAL DEPTH **4,466 feet**


COMM. **November 25, 1975**

COMP. **December 8, 1975**

SHOT OR TREATED

CONTRACTOR **H-30, INC.**

ISSUED



CASING

20

10

15

8

12

6

13

5

5/8" 258' cemented w/225 sxs cement

ELEVATION **1,657'KB**

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	80'
Red Bed	265'
Shale	1,095'
Shale and Lime	1,644'
Lime and Shale	3,585'
Lime	4,466'
Rotary Total Depth	4,466'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting

Dean Britting

State of Kansas

County of Sedgwick

} SS:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 16 th day of December, 1975.



Elsie Willison

Elsie Willison -- Notary Public

My Commission Expires:

June 30, 1978

RECEIVED
DEC 16 1975

WICHITA, KANSAS