


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

KINGMAN County. Sec. 9 Twp. 29S Rge. 9W (E) (W)
Location as "NE/CNW/SW" or footage from lines E/2 SE/4
Lease Owner T. L. Nutt and Dean Wells
Lease Name Henning Well No. 1
Office Address P. O. Box 562, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed December 10 19 61
Application for plugging filed _____ 19 _____
Application for plugging approved April 19 19 61
Plugging commenced April 20 19 61
Plugging completed April 23 19 61
Reason for abandonment of well or producing formation Depleted

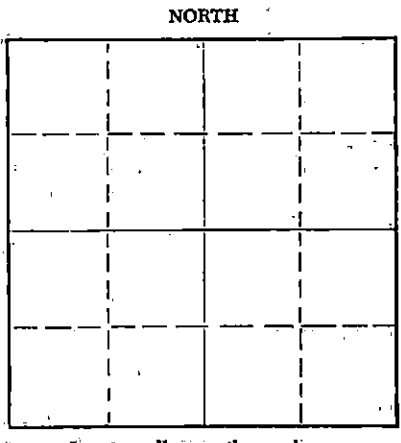

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Fred W. Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4485' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	179'	None
				5 1/2	4481'	3214'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4469'	-	4425'	Filled with Sand
4425'	-	4390'	4 Sacks Cement
4390'	-	300'	Mud
300'	-	290'	Rock Bridge
290'	-	200'	15 Sacks Cement
200'	-	170'	Mud
170'	-	160'	Rock Bridge
160'	-	100'	10 Sacks Cement
100'	-	35'	Mud
35'	-	Base	10 Sacks Cement

RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn & Smith Pipe Pulling Company
Address P. O. Box 114, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
T. L. Nutt (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. L. Nutt
P. O. BOX 562, GREAT BEND, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of May, 1961.
Evelyn L. Miller
Notary Public.

My commission expires _____
EVELYN L. MILLER, NOTARY PUBLIC
Commission Expires Feb. 25, 1963

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- ANSCHUTZ DRILLING CO.
Farm- Henning No. 1

SEC. 9 T. 29 R. 9W
SE SE SE

Total Depth. 4485'
Comm. 11-27-56 Comp. 12-10-56
Shot or Treated.
Contractor.
Issued. 10-26-57

County Kingman
KANSAS



Elevation. 1653' RB

Production. 74' BOPD

Figures indicate Bottom of Formations.

soil	3
sand	50
red bed	80
red bed-shells	183
red rock	750
shale-shells	1250
shale w/lime	1455
lime-shale	1775
lime	1884
lime-shale	2900
shale w/lime	3120
shale-lime	3555
lime	3958
shale-lime	4183
Mississippi	4195
cherty Mississippi	4253
Mississippi lime	4265
lime	4334
shale	4432
shale-lime	4452
Viola	4456
Viola lime	4485
Total Depth	

TOPS: Scout	
Heebner	3348
Toronto	3367
Douglas	3379
Douglas sand	3428
Lansing	3555
B/Kansas City	3982
Mississippi	4183
Kinderhook	4281
Viola	4452

Drill pipe strapped @ 4481 TD

RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1951
CONSERVATION DIVISION
Wichita, Kansas