

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
 Conservation Division
 211 North Broadway
 Wichita, Kansas

FILE NO. 76-24
 LOCATION SE-NE-SW
 SEC. 16 TWP. 22 RGE. 12W

Dry Hole _____ Abandoned Oil Well Abandoned Gas Well _____

I have this date completed supervision of plugging of:


Well No. 1 Lease Spangenberg "B"
 Operator Heathman & Co. Inc. Address 1015 E. 2nd Wichita Kan
 Field _____ County Stafford
 Total Depth 3740 Feet.
 Plugging Contractor West Supply Co. Inc.
 Plugging Contractor's License No. 14
 Address Chase Kans.

(Describe briefly the manner in which the well was plugged)

Surface pipe 8" @ 260' c.w.c. 5 1/2" @ 3740'
w/ 150 st Cem. Cement not drilled out. Top Perf.
3692' Sand to 3685 dump 5 st Cem. Shot
off and pulled 5 1/2" casing. Mudded hole to
260' set rock bridge and run 20 st Cem.
mud to 35' rock bridge & 10 st Cem to
base of cellar

Warren H. Horner
 District Conservation Agent

Date Nov 16, 1954

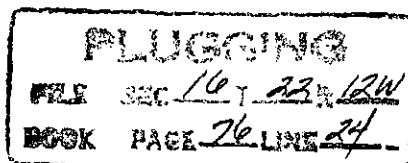

11-19-54