


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

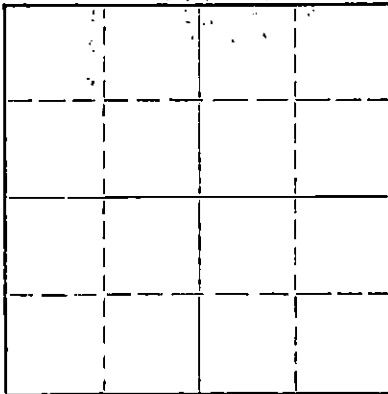

Locate well correctly on above
Section Plat

Stafford County. Sec. 15 Twp. 22 Rge. 13 (E) (W)X
Location as "NE/CNW/SW" or footage from lines NW NE NE
Lease Owner Sooner Pipe & Supply Corporation
Lease Name Soeken B Well No. #1
Office Address 301 Petroleum Club Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 5-9-67 19
Application for plugging approved 19
Plugging commenced 7-27-67 19
Plugging completed 7-31-67 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation Depth to top Bottom Total Depth of Well 3861' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3861'	3009.82'
				8 5/8"	295'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3450', mixed and ran 4 sacks cement thru dump bailer.
Mudded hole to 285', set 10' rock bridge. Mixed and ran 3 sacks cement thru dump bailer.
Filled hole with 3 3/4 yards ready mix from 265' to base of cellar.

8-2-67

AUG 2 1967

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas


STATE OF Kansas COUNTY OF Barton, ss.
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer doc.

Box 364, Great Bend, Kansas (Address)

Subscribed AND Sworn to before me this 1 day of August, 19 67

Sidney D. Miller Notary Public.



RECEIVED
STATE CORPORATION COMMISSION

JUL 7 1967

CONSERVATION DIVISION
Wichita, KansasWELL LOG

Date Commenced: December 31, 1963

Soeken 1

NW NE NE

Date Completed: February 10, 1964

Sec. 15-22-13W

Stafford County, Kansas

0	-	271'	Clay & Sand
271'	-	680'	Red Bed
680'	-	710'	Anhydrite
710'	-	1530'	Shale, Salt, Shells
1530'	-	2839'	Shale, Lime
2839'	-	2873'	Shale
2873'	-	3261'	Lime & Shale
3261'	-	3302'	Shale & Lime
3302'	-	3664'	Lime
3664'	-	3722'	Lime, Shale
3722'	-	3760'	Chert

Elevation 1876 K.B.

Formation Data:

Anhydrite	680'
Heebner	3238'
Lansing	3412'
B/KC	3664'
Arbuckle	3807'
RTD	3871'

SURFACE CASING: 8 5/8" @ 295' with
230 sacks cement.Production Casing: 4 1/2" @ 3680' with
110 sacks cement.AFFIDAVIT

State of Oklahoma

County of Tulsa) ss.

Ralph B. Hammond, of lawful age, does swear that the facts and statements herein contained are true and correct to the best of his knowledge.

Ralph B. Hammond
Ralph B. Hammond

Subscribed and sworn to before me this 6th day of July, 1967

Linda A. Ryche
Linda A. Ryche, NOTARY PUBLIC

My Commission Expires FEB. 6, 1971