

WELL PLUGGING RECORD


STATE OF KANSAS
STATE CORPORATION COMMISSION.

FORMATION PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Strike out upper line
when reporting plugging
of formations.

NORTH

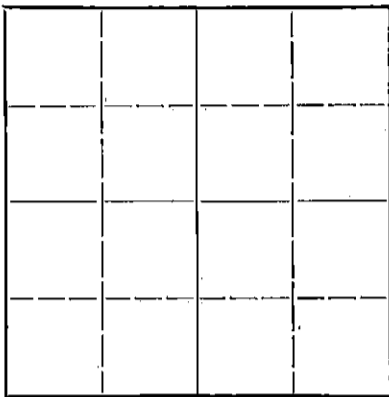

Locate well correctly on above
Section Plat

Stafford County Sec 15 Twp 22 Rge 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE 1/4 SW 1/4 NW
Lease Owner Franco Central Oil Company
Lease Name Moon Well No. 2
Office Address 306 4th Nat'l Bk. Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 7-1-48 19
Application for plugging filed 7-18-48 19
Application for plugging approved 19
Plugging commenced 7-1-48 19
Plugging completed 7-1-48 19
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Arbuckle Depth to top 3720' Bottom 3855' Total Depth of Well 3855' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle	no test	3720	3855			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Well was filled with mud, through the drill pipe, from 3855' to 300'. Cemented with 10 sax of Cement in bottom of surface pipe 275-85'. Mudded from 275 feet to top of hole - run 15 sax of cement in top of surface casing.

7-20-48



(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to _____
Address _____

STATE OF Kansas, COUNTY OF Sedgwick, ss.
I. M. Clothier (employee of owner) or (operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *I. M. Clothier*
306 4th Nat'l Bk. Bldg. Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 19th day of July, 1948.

My commission expires July 11, 1951
My commission expires _____
Lois Mathews
Notary Public.



MOON #2

Location: NEc SW/4 NW
15-22-13W
Stafford County, Kansas

Commenced: 6/19/48

Completed: 7/1/48

Operator: Franco Central Oil Company

Production: D & A

Contractor: Shawver-Graham, Inc.

Casing Record: Set 285' of 8" Casing
cemented with 240 Sacks Cement

LOG

SSand	170
Shale	190
Shale and Shells	285
Red Bed	415
Sand and Red Bed	755
Red Bed	910
Shale and Shells	1640
Lime	1780
Lime and Shale	1830
Lime	1939
Lime and Shale	2125
Shale and Lime	2340
Lime	2465
Lime and Shale	2786
Shale and Lime	3026
Lime and Shale	3100
Shale and Lime	3245
Lime	3680
Viola	3698
Lime	3720
Lime and Chat	3778
Lime and Shale	3855
Total Depth	3855

The undersigned, Shawver-Graham, Inc., hereby certifies that the above log is a true and correct log of the formation encountered in drilling the above noted well as reflected by the Daily Drilling Reports.

SHAWVER-GRAHAM, INC.

By: D. M. Shawver
President




STATE OF KANSAS }
COUNTY OF SEDGWICK } SS

Be it remembered that on this 12th day of July, 1948 before me the undersigned, a notary public, duly commissioned in and for the County and State aforesaid came D. M. Shawver, President of SHAWVER-GRAHAM, INC., a Corporation of the State of Kansas, personally known to me to be such officer, and to be the same person who executed as such officer the foregoing instrument of writing in behalf of said Corporation, and he duly acknowledge the execution of the same for himself and for said Corporation.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

My commission expires: July 3, 1950.



Jay D. Nelson
Notary Public