

ORIGINAL

SIDE ONE

STATE CORPORATION COMMISSION OF KANSAS
 OIL & GAS CONSERVATION DIVISION
 WELL COMPLETION FORM
 ACO-1 WELL HISTORY
 DESCRIPTION OF WELL AND LEASE

Operator: License # 6170
 Name: Globe Exploration, Inc.
 Address P.O. Box 12

City/State/Zip Great Bend, KS 67530

~~Purchaser: No Purchaser - Dry Hole~~

Operator Contact Person: Ralph Stalcup
 Phone (316) 792-7607

Contractor: Name: Duke Drilling Co., Inc.
 License: 5929

Wellsite Geologist: James Musgrove

Designate Type of Completion
 New Well Re-Entry Workover

Oil SWD Temp. Abd.
 Gas Inj Delayed Comp.
 Dry Other (Core, Water Supply, etc.)

If OWO: old well info as follows:
 Operator: _____
 Well Name: _____
 Comp. Date _____ Old Total Depth _____

Drilling Method:
 Mud Rotary Air Rotary Cable
11-25-89 12-1-89 12/1/89
 Spud Date Date Reached TD Completion Date

API NO. 15- 185-22,628-0000

County Stafford

SE NE SE Sec. 1 Twp. 22 Rge. 13 East West

1650 Ft. North from Southeast Corner of Section


330 Ft. West from Southeast Corner of Section
 (NOTE: Locate well in section plat below.)

Lease Name Drach Well # 1

Field Name _____
 Producing formation Atchafalaya

Elevation: Ground 1872 KB 1877

Total Depth 3673 PBTD _____

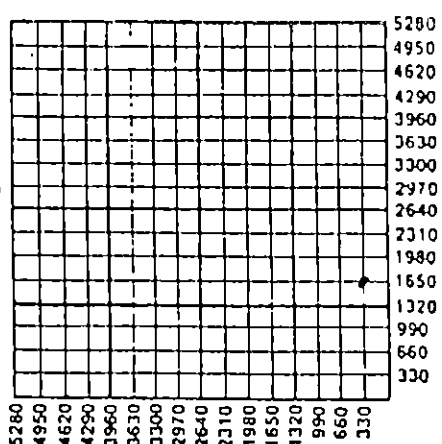

Amount of Surface Pipe Set and Cemented at 296' Feet

Multiple Stage Cementing Collar Used? Yes No

If yes, show depth set _____ Feet

If Alternate II completion, cement circulated from _____

feet depth to _____ w/ _____ sx cmt.

RECEIVED
 8-17-90

ACT I
 DIA

INSTRUCTIONS: This form shall be completed in triplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 120 days of the spud date of any well. Rule 82-3-130, 82-3-107 and 82-3-106 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells. Any recompletion, workover or conversion of a well requires filing of ACO-2 within 120 days from commencement date of such work.


All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature Ralph Stalcup
 Title President Date 3-7-90

Subscribed and sworn to before me this 7 day of March, 19 90.

Notary Public Marilyn Rodgers

Date Commission Expires _____



K.C.C. OFFICE USE ONLY

F Letter of Confidentiality Attached
 C Wireline Log Received
 C Drillers Timelog Received

Distribution

KCC SWD/Rep NGPA
 KGS Plug Other (Specify)

ORIGINAL

Side 2

DST Information

DST #1 3311 - 3390 ISI 45 min Tool Open 45 min FSI 45 min
Weak Steady Thru out REC: 40' slightly oil cut mud; 60' gas cut
watery mud
ISP 530# IFP 109-117# FFP 143-151# FSP 488#

DST #1 3428 - 3460 ISI 45 min Tool Open 45 min FSI 45 min
Weak steady thru out test REC: 130' muddy water
ISP 1010# IFP 125-142# FFP 167-184# FSP 984#

DST #3 3460 - 3530 ISI 30 min Tool Open 30 min FSI 30 min
Weak thru out test REC: 30' drilling mud; 60' gas
ISP 218# IFP 51-51# FFP 58-58# FSP 124#

DST #4 3602 - 3673 ISI 45 min Tool Open 45 min FSI 45 min
Good thru out test REC: 820' fluid; 620' oil cut mud; 200'
heavily oil cut mud
ISP 1243# IFP 101-193# FFP 319-420# FSP 1243#

Formation Description

0	212	Claybed
212	679	Redbed
679	704	Anhy
704	1450	Shale
1450	3125	Shale and Lime
3125	3673	Lime
3673		RTD

RECEIVED
STATE OF KANSAS

MAR 09 1990

CONSERVATION DIVISION
Wichita, Kansas

ALLIED CEMENTING COMPANY, INC.

P. O. BOX 31

RUSSELL, KANSAS 67885

ORIGINAL

TO: Glebe Exploration Inc.

INVOICE NO. 55328

Box 12

PURCHASE ORDER NO. _____

Great Bend, Kansas 67530

LEASE NAME Drath #1

DATE Nov. 25, 1989

SERVICE AND MATERIALS AS FOLLOWS:

Common 96 sks @\$5.00	\$ 480.00	
Pozmix 64 sks @\$2.25	144.00	
Gel 3 sks @\$6.75	20.25	
Chloride 5 sks @\$20.00	<u>100.00</u>	\$ 744.25

Handling 160 sks @\$0.90	144.00	
Mileage (16) @\$0.03¢ per sk per mi	76.80	
Surface	360.00	
Mi @\$1.00 pmp. trk.	16.00	
1 plug	<u>40.00</u>	<u>636.80</u>

Total \$ **1,381.05**

Cement circ.

STATE OF KANSAS

AUG 7 1990

CONSERVATION DIVISION
Wichita, Kansas

THANK YOU. *RS*

ALL PRICES ARE NET, PAYABLE 30 DAYS FOLLOWING DATE OF INVOICE. 1% PERCENT CHARGED THEREAFTER

Well, Kansas
 , Great Bend, Kansas

ORIGINAL

Phone Plainville 913-434-2812
 Phone Ness City 913-798-3843

ALLIED CEMENTING CO., INC. No. 10310

Home Office P. O. Box 31

Russell, Kansas 67665

Date	11-25-89	Sec.	1	Twp.	22	Range	13	Called Out	12:30 P.M.	On Location	2:00 P.M.	Job Start	4:00 P.M.	Finish	4:30 P.M.
Lease	Drugh	Well No.	1	Location				K-19-281-3E, 1/4	County	Stettin	State	Ks			

Contractor	Duke #1		
Type Job	Surface Cement		
Hole Size	12 1/4	T.D.	297
Csg.	2816 8 3/8	Depth	299
Tbg. Size		Depth	
Drill Pipe		Depth	
Tool		Depth	
Cement Left in Csg.	15'	Shoe Joint	
Press Max.		Minimum	
Meas Line	✓	Displace	✓
Perf.			

Owner *Sg me*

To Allied Cementing Co., Inc.
 You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.

Charge To *Globe Exploration Inc.*
 Street *Box 12*
 City *Great Bend* State *Ks* 67530

The above was done to satisfaction and supervision of owner agent or contractor.

Purchase Order No. *Leonard Williams*

EQUIPMENT

No.	Cementer	<i>Allen</i>
Pumptrk #120	Helper	<i>Brad Tim</i>
No.	Cementer	
Pumptrk #	Helper	
#	Driver	<i>Mike #</i>
Bulktrk 101	Driver	

CEMENT

Amount Ordered	<i>160.5x 9/16 372</i>
Consisting of	
Common	<i>96 5.00 480.00</i>
Poz. Mix	<i>64 2.25 144.00</i>
Gel.	<i>3 6.75 20.25</i>
Chloride	<i>5 20.00 100.00</i>
Quickset	

DEPTH of Job

Reference:	<i>Pump trk Chgs</i>	<i>360.00</i>
	<i>Pump trk mileage</i>	<i>16.00</i>
	<i>1 8 3/8 Plug</i>	<i>40.00</i>
	Sub Total	
	Tax	
	Total	<i>416.00</i>

Handling	<i>160</i>	<i>90</i>	<i>144.00</i>
Mileage	<i>16</i>		<i>76.80</i>
		Sub Total	
		Total	<i>965.00</i>

Remarks:
*Cement Did Circulate
 Plug Down 150' when Cement Circulate,*

Floating Equipment

Total \$ 1381.05
Disc - 276.21
1104.84

TELEPHONE:

AREA CODE 913 489-2827

ALLIED CEMENTING COMPANY, INC.

P. O. BOX 31

RUSSELL, KANSAS 67665

ORIGINAL

TO: Globe Explorations Inc.

Box 12

Great Bend, Kansas 67530

INVOICE NO. 56091

PURCHASE ORDER NO. _____

LEASE NAME Drach #1

DATE March 19, 1990

SERVICE AND MATERIALS AS FOLLOWS:

Common 90 sks @\$5.00	\$ 450.00	
Pozmix 60 sks @\$2.25	135.00	
Gel 26 sks @\$6.75	175.50	
Hulls 5 sks @\$14.00	<u>70.00</u>	\$ 830.50

Handling 150 sks @\$0.90	135.00	
Mileage (17) @\$0.03¢ per sk per mi.	76.50	
Plugging	340.00	
Mi @\$1.00 pmp. trk.	<u>17.00</u>	

S. Tax	568.50
	<u>29.85</u>

Total \$ 1,428.85

STATE COLLECTOR

AUG 17 1990

CONSERVATION DIVISION
Wichita, Kansas

PLEASE DO NOT TAKE DISC. ON SALES TAX.

R. L.

THANK YOU

ALL PRICES ARE NET, PAYABLE 30 DAYS FOLLOWING DATE OF INVOICE. 1% PERCENT CHARGED THEREAFTER

*Drach #1
typed on
back*

Russell, Kansas
3861, Great Bend, Kansas

ORIGINAL

Phone Plainville 913-434-2812

Phone Ness City 913-798-3843

ALLIED CEMENTING CO., INC. N^o 10268

Home Office P. O. Box 31

Russell, Kansas 67665

old

Date	3-19-90	Sec.	1	Twp.	27	Range	13	Called Out		On Location		Job Start	9:00 a.m.	Finish	10:00 a.m.
Lease	Drach	Well No.	1	Location				K-19 #241-3E-1/4N-1/4E		County	Stafford	State	Ks.		
Contractor	F.B. Casins														
Type Job	Plug to Abandon														
Hole Size	5 1/2	T.D.	36.70												
Csg.	4 5/8	Depth	276												
Tbg. Size		Depth													
Drill Pipe		Depth													
Tool		Depth													
Cement Left in Csg.		Shoe Joint													
Press Max.	500	Minimum													
Meas Line		Displace													
Perf.															

Owner Same
To Allied Cementing Co., Inc.
You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.

Charge To Globe Explorations Inc.
Street Box 12
City Great Bend State Ks 67530

The above was done to satisfaction and supervision of owner agent or contractor.

Purchase Order No. *[Signature]*
X *[Signature]*

CEMENT

Amount Ordered	150 sk 6 1/4 10 gal - 20 gal - 500 # / sk	
Consisting of		
Common	90	450.00
Poz. Mix	60	135.00
Gel. Charge	26	175.50
Chloride		
Quickset		
Hulls - 5	14.00	70.00
Handling	150	135.00
Mileage	17	76.50
Sub Total		1042.00
Total		1042.00

EQUIPMENT

Pumptrk # No.	Cementer	Allen
120	Helper	Brad
Pumptrk No.	Cementer	
	Helper	
Bulktrk #	Driver	Curtis
114	Driver	

DEPTH of Job

Reference:	Pump trk. Chg	340.00
	Pump trk. mileage	17.00
	1 8 5/8 Plug	N/C
	Sub Total	
	Tax	
	Total	357.00

Remarks: mixed 4 hulls - 10 gal - 50 cement
10 gal - 1 hull - Released Plug
100 sk Cement - Station @
100 psf
THANK YOU

Floating Equipment
TOTAL \$ 1,399.00
Disc - 279.80
... 1119.20
TAX 29.85
\$ 1149.05

ORIGINAL

Great Bend Casing Pullers, Inc.

P. O. Box 768

Great Bend, Kansas 67530

(316) 793-9711



In Account With

Globe Exploration, Inc.
P. O. Box 12
Great Bend, Kansas 67530

Date 3-16-90

Authorized By Ralph

Customer Order No. _____

Lease & Well No. Drach #1

Work Performed Plug well

County Stafford

Legal Description—Sec. 1

Twp. 22

Rge. 13

TERMS: Net 30 Days from Date of Invoice unless authorized by Great Bend Casing Pullers, Inc.

Details of Work Ordered and Services Performed

Invoice No. 90-17		Date of Job
Quantity	Description	Amount
1	Move in & set up charge	600.00
1	Potter plug - sand & cement	50.00
1	Casing shot @ 80.00 (3033')	80.00
3033.35'	5 1/2" casing recovery @ .55	1668.34
		2399.34
	Sales tax	125.91
	Total	\$2524.25
Terms: 25 discount for 10 day pay, not 30 days		
(Discount \$50.48)		
AUG 1 1990		