


DISTRICT CONSERVATION AGENT'S REPORT

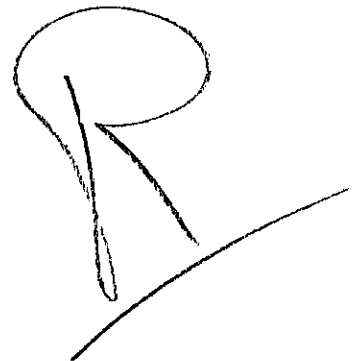

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

15-185-12773-0000

FILE NO. 98-30

LOCATION SW-SW-7E

SEC. 33 TWP. 23 RGE. 13.00

Dry Hole Abandoned Oil Well X Abandoned Gas Well

I have today completed supervision of plugging of:

Well No. 1 Lease Hager

Operator Plains Exploration Co Address Mr. E. E. Murren - Stafford - Kans.

Field County Stafford

Total Depth 3733 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/2" - 329 ft. Circulated with cement.
5" casing set at 3732 ft. - Cemented with 12 1/2 sacks cement
Low Well Plug at 3612 ft. - Chert to 3579 ft. - Dumped
4 sacks of cement at 3579 ft. Shot off & pulled the
5" casing - Mud to 300 ft. - Set Rock Bridge & 15 sacks
of cement at 300 ft. - Mud to 30 ft. - Plug & 10 sacks
of cement at the surface
Steeling Drilling Co. Plugging Contractor

PLUGGING
FILE SEC. 33 T. 23 R. 13W
BOOK PAGE 35 LINE 30

RECEIVED
STATE CORPORATION COMMISSION
JAN 20 1951 1-20-51
CONSERVATION DIVISION
C. W. Stovall
District Conservation Agent

Date 1-17-51