


15-165-20187-0000
Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

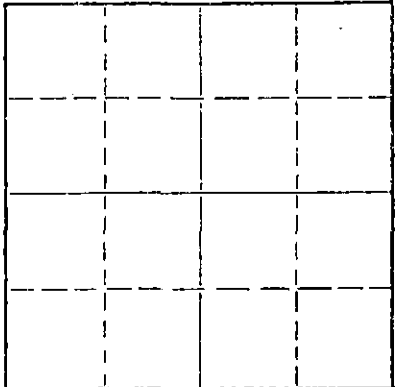

Locate well correctly on above
Section Plat

Rush County. Sec. 17 Twp. 17S Rge. (X) 20(W)
Location as "NE/CNW/SW" or footage from lines. C SE NE
Lease Owner Raymond Oil Co., Inc.
Lease Name Elmore "A" Well No. 3
Office Address 410 Fourth National Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 8, 1968
Application for plugging filed October 8, 1968
Application for plugging approved October 8, 1968
Plugging commenced October 8, 1968
Plugging completed October 8, 1968
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4062 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1365'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded up with heavy mud to 480 feet. Followed by wooden plug and 1/2 sack hulls. Placed 25 sacks cement onto hulls. Mudded up with heavy mud to 40 feet followed by wooden plug, 1/2 sack hulls and 10 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
OCT 16 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Graves Drilling Co., Inc.
Address 505 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
505 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of October, 1968.

My commission expires May 9, 1971 Betty Brandt Notary Public.

15-105-20187-0000

R O T A R Y D R I L L E R S' L O G

OPERATOR: Raymond Oil Co., Inc. DRILLING COMMENCED: October 1, 1968
 410 Fourth National Bldg.
 Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: October 8, 1968
 505 Union Center
 Wichita, Kansas 67202

CASING RECORD: 47 Jts. 1365' 8-5/8" LOCATION: Elmore "A" No. 3
 cemented with 775 sacks C SE NE
 Section 17-17S-20W
 Rush County, Kansas

0 - 15	Sod & clay
15 - 1200	Shale & shells
1200 - 1354	Shale & red bed
1354 - 1367	Anhydrite
1367 - 1373	Lime
1373 - 1387	Anhydrite
1387 - 1985	Shale & red bed
1895 - 2083	Shale & shells
2083 - 2316	Lime & shale
2316 - 2625	Lime
2625 - 2760	Lime & shale
2760 - 3052	Shale & lime
3052 - 3515	Lime
3515 - 3670	Lime & shale
3670 - 3790	Lime
3790 - 3995	Lime & shale
3995 - 4008	Sand
4008 - 4035	Lime
4035 - 4037	Shale & sandy shale
4037 - 4062	Chert & lime
4062	Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 16 1968
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By *John P. Graves*

STATE OF KANSAS)
)
 SEDGWICK COUNTY)

ss:

Subscribed and sworn to before me, a Notary Public, this 14th of October, 1968.

My commission expires May 9, 1971

Betty Brandt
 Betty Brandt Notary Public