


STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Stafford SEC. 4 TWP. 22 RGE. 13 E/W
Location as in quarters or footage from lines:
SE/NE/SW

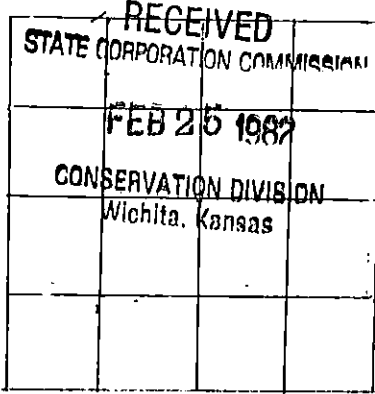

Lease Owner Woodman-Iannitti Oil Company
Lease Name Mueller Well No. #1
Office Address 1008 Douglas Bldg. - 104 S. Broadway -
Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole): Oil
Date Well Completed _____
Application for plugging filed _____
Plugging commenced February 08, 1982
Plugging completed February 19, 1982
Reason for abandonment of well or producing formation
Depleted

Locate Well
correctly on above
Section Platt.

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. H. Metz

Producing formation _____ Depth to top _____ bottom _____ T.D. 3777'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				8 5/8"	287'	NONE
				5 1/2"	3766'	2606.63'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped sand to 3500' and five (5) sacks cement.
Shot pipe @ 2900', 2700' and 2530'.
Pulled eighty-one (81) joints of 5 1/2" casing.
Squeezed well with four (4) sacks hulls, twenty-five (25) sacks gel, one hundred forty (140) sacks 50/50 pozmix cement with 4% added gel and 3% calcium chloride.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.

STATE OF KANSAS COUNTY OF BARTON, ss.

James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
James W. Rockhold
(Address)
Box 698 - Great Bend, Ks.

SUBSCRIBED AND SWORN TO before me this 24th day of Feb, 1982

Ruth Brack
Notary Public.

My Commission expires: _____



DRILLERS LOG

#1 MUELLER

CASING RECORD: OPERATOR: Kathol Petroleum, Inc. DESCRIPTION:
 8-5/8" @ 287' w/ 200 sacks cem. CONTRACTOR: Kathol Petroleum, Inc. SE NE SW
 5-1/2" @ 3766 w/ 150 sacks cem. COMMENCED: December 26, 1970 Stafford County, Ks.
 T.D. 3777' COMPLETED: January 5, 1971 ELEVATION: 1895' D.F.
 I.P. 75 B.O. + 25 B.1

<u>FORMATION:</u>	<u>FROM:</u>	<u>TO:</u>	<u>REMARKS:</u>
surface hole	0	287	
red bed & shale	287	766	
anhydrite	766	772	
shale & shells	772	875	
shale & shells	875	1735	
shale & lime	1735	2060	
lime & shale	2060	2290	
shale & lime	2290	2715	
shale & lime	2715	2965	
lime & shale	2965	3115	
lime	3115	3250	
shale & lime	3250	3325	
lime & shale	3325	3440	
lime & shale	3440	3453	
lime	3453	3490	
lime	3490	3510	
lime	3510	3525	
lime	3525	3550	
lime	3550	3585	
lime	3585	3640	
lime	3640	3710	
lime & shale	3710	3760	
lime	3760	3772	
lime	3772	3777 R.T.D.	

I hereby certify that the above information is true and correct to the best of my knowledge.

RECEIVED

NOV 30 1971

KATHOL PETROLEUM, INC. CONSERVATION DIVISION
 Wichita, Kansas

G. Carl Hale

G. Carl Hale, Vice President

Subscribed and sworn to before me this 10th day of May, 1971.

Jack L. Keane
 Jack L. Keane Notary Public

My Commission Expires:

October 18, 1972