

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

A 4x4 grid with a small circle in the third row, fourth column.

**Locate well correctly on above
Section Plat**

15-185-60743-0000

Stafford County, Sec. 15 Twp 23S Rge 13 (E) (W)

Location as "NE/CNW¼SW¼" or footage from lines NE NE SE

Lease Owner Imperial Petroleum Company, Inc.

Lease Name Ward Well No. 1

Office Address Union National Bank Building, Wichita

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed March 23, 19 51

Application for plugging filed March 22, 19 51

Application for plugging approved March 22, 19 51

Plugging commenced 10:00 A.M., March 23, 19 51

Plugging completed 1:00 P.M., March 23, 19 51

Reason for abandonment of well or producing formation Commercial quantity of oil not found.

If a producing well is abandoned, date of last production -- 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well.....~~Mr. Durkee~~ C. D. Stough.....
Producing formation.....--..... Depth to top..... Bottom..... Total Depth of Well.....3921 Feet
Show depth and thickness of all water, oil and gas formations.

CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Circulated hole full of mud; shoved Halliburton plug to 300' through open end of drill pipe and poured 15 sacks of cement through open end of drill pipe on top of plug. Filled with mud to 30' and capped with 10 sacks of cement.

RECEIVED
STATE CORPORATION

~~MAR 28 1957~~

3-28-57

CONCEIÇÃO DO LIVELTON
Machil, Karaga

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to..... Imperial Petroleum Company, Inc.
Address..... Union National Bank Bldg., Wichita, Ks.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Clinton Engstrand, agent for (employee of owner) or owner or operator of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
 described well as filed and that the same are true and correct. So help me God.

(Signature)

1006 Central Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 27th day of March, 1951

My commission expires.....6-5-54

23-5091-S

8-50-10M

Notary Public.

PLUGGING
FILE SEC 15T 22R13W
BOOK PAGE 169 LINE 30

15-185-00743-0000

IMPERIAL PETROLEUM CO., INC.
WARD # 1

NE NE SE Sec. 15-23S-13W
Stafford County, Kansas

Total Depth: 3921'
Comm: 3-7-51
Comp: 3-23-51

Casing

8 5/8" Set @ 306'
5 1/2" - None

Cement

175 Sacks
None

FORMATION

DEPTH


Sand	0 - 140
Shale & shells	140 - 175
Shale	175 - 185
Sand	185 - 270
Shale & shells	270 - 370
Shale & shells, redbed	370 - 915
Shale & shells	915 - 1390
Shale & lime streaks	1390 - 1645
Shale & lime shells	1645 - 1730
Lime & shale	1730 - 1840
Lime & shale breaks	1840 - 1930
Shale & lime	1930 - 2510
Shale & shells	2510 - 2730
Shale & lime	2730 - 3245
Lime (Hard)	3245 - 3325
Shale & lime	3325 - 3415
Lime	3415 - 3485
Lime & shale streaks	3485 - 3516
Lime & shale breaks	3516 - 3550
Lime	3550 - 3695
Lime & shale	3695 - 3735
Conglomerate	3735 - 3752
Viola (chert)	3752 - 3765
Lime	3765 - 3777
Chert, lime & shale	3777 - 3796
Chert	3796 - 3806
Chert & shale	3806 - 3837
Shale	3837 - 3865
Shale & chert	3865 - 3888
Arbuckle	3888 - 3913
Lime	3913 - 3921

STATE OF KANSAS)
) SS
SEDGWICK COUNTY)

I hereby certify that the above information is true and
correct to the best of my knowledge.

[Signature]

Subscribed and sworn to before me this 27th day of March, 1951



RECEIVED
STATE CORPORATION COMMISSION
MAR 30 1951
[Signature]
Notary Public

My commission expires: 6-5-54

IMPERIAL PETROLEUM CO., INC.
WARD # 1

NE NE SE Sec. 15-23S-13W
Stafford County, Kansas

Total Depth: 3921'
Comm: 3-7-51
Comp: 3-23-51

Casing

8 5/8" Set @ 306'
5 1/2" - None

Cement

175 Sacks
None

FORMATION

DEPTH

Sand	0 - 140
Shale and shells	140 - 175
Shale	175 - 185
Sand	185 - 270
Shale and shells	270 - 370
Shale & shells, redbed	370 - 915
Shale & shells	915 - 1390
Shale & lime streaks	1390 - 1645
Shale & lime shells	1645 - 1730
Lime & shale	1730 - 1840
Lime and shale breaks	1840 - 1930
Shale & lime	1930 - 2510
Shale & shells	2510 - 2730
Shale & lime	2730 - 3245
Lime (Hard)	3245 - 3325
Shale & lime	3325 - 3415
Lime	3415 - 3485
Lime & shale streaks	3485 - 3516
Lime & shale breaks	3516 - 3550
Lime	3550 - 3695
Lime & shale	3695 - 3735
Conglomerate	3735 - 3752
Viola (chert)	3752 - 3765
Lime	3765 - 3777
Chert, lime & shale	3777 - 3796
Chert	3796 - 3806
Chert & shale	3806 - 3837


PLUGGING

FILE SEC 15 T 23 R 13 W
BOOK PAGE 69 LINE 30


Shale	3837 - 3865
Shale & chert	3865 - 3888
Arbuckle	3888 - 3913
Lime	3913 - 3921

STATE OF KANSAS)
SEDGWICK COUNTY) SS

I hereby certify that the above information is true and correct to the best of my knowledge.



Subscribed and sworn to before me this 27th day of March, 1951.

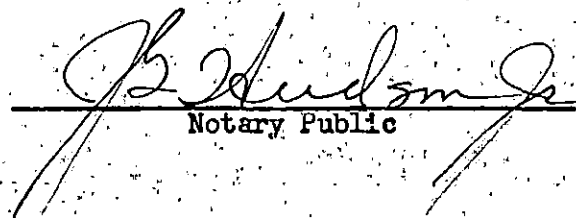
Notary Public

My commission expires: 6-5-54

Entered in
Frederick Omon Stone
March 20 1951