

10-28-81 OCT 28 1981 15-185-21397-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

CONSERVATION DIVISION
Wichita, Kansas

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stafford County. Sec. 18 Twp. 23S Rge. 13WE/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
S/2 NW SW
Lease Owner Kennedy & Mitchell, Inc.
Lease Name OJEDA #44-709 Well No. _____
Office Address 7400 West Jefferson Ave., Denver, CO
Character of Well (Completed as Oil, Gas or Dry Hole)
dry hole

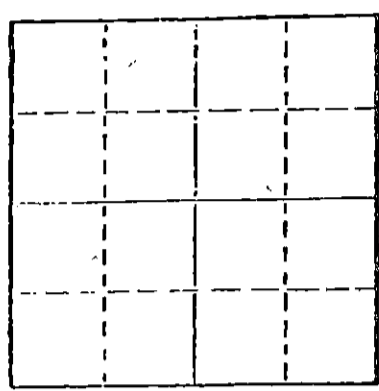

Locate well correctly on above
Section Plot

Date Well completed 10/08 1981
Application for plugging filed 10/08 1981
Application for plugging approved 10/08 1981
Plugging commenced 10/08 1981
Plugging completed 10/08 1981
Reason for abandonment of well or producing formation
dry hole

If a producing well is abandoned, date of last production
19 _____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well S. Durrant
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4030
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	302'	8-5/8"	302'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

70 sks @ 720'
40 sks @ 210'
10 sks @ 40'
10 sks in rathole
plug down 5 PM, 10/08/81 by Sun
S. Durrant, plugger

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allen Drilling Company

STATE OF KANSAS COUNTY OF BARTON, ss.
James R. Holley (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James R. Holley
F.O. Box 1389, Great Bend, KS 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of October, 1981

My commission expires _____



Ruth Brack
Notary Public.

15-185-21397-0000

RECEIVED
STATE CORPORATION COMMISSION

OCT 28 1981

DRILLER'S WELL LOG

CONSERVATION DIVISION
Wichita, Kansas

DATE COMMENCED: 09/30/81
DATE COMPLETED: 10/08/81

Kennedy & Mitchell, Inc.
OJEDA #44709
S/2 NW SW
Sec. 18, Twp. 23S, Rge. 13W,
Stafford County, Kansas

ELEVATION: G.L.
K.B.

FORMATION DATA:

3358 - 3383'	Shale
3383 - 3405'	Lime
3405 - 3501'	Shale
3501 - 3520'	Lime, shale
3520 - 3744'	Lime
3744 - 3855'	Lime, shale
3855 - 3920'	Chert
3920 - 3937'	Shale
3937 - 3975'	Sand
3975 - 4030'	Dolomite
4030'	RTD

Heebner	3358'
Toronto	3383'
Douglas Shale	3405'
Brown Lime	3501'
Lansing KC	3520'
Base KC	3744'
Viola	3855'
Simpson shale	3920'
Simpson sand	3937'
Arbuckle	3975'
RTD	4030'

SURFACE DATA:

Ran 7 jts. 23# new 8-5/8" casing; tally 295'; set @ 302' w/ 235 sks com, 2% gel, 3% cc., cement. circ., plug down 10:45 PM, 9/30/81 by Sun

PLUGGING DATA:

70 sks @ 720'
40 sks @ 210'
10 sks @ 40'
10 sks in rathole
plug down 5 PM, 10/8/81
By Sun; S. Durrant, supvr.

A F F I D A V I T

STATE OF KANSAS)
COUNTY OF BARTON) ss.

James R. Holley, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

James R. Holley

Subscribed and Sworn to before me this 21st day of October, 1981.



Ruth Brack
Notary Public