


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Stafford County, Sec. 21 Twp. 23 Rge. 13 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW-NE-SW
Lease Owner Clinton Oil Company
Lease Name Francis Well No. 1-V
Office Address 217 N. Water, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-31 1970
Application for plugging filed 12-31 1970
Application for plugging approved 12-31 1970
Plugging commenced 12-31 1970
Plugging completed 12-31 1970
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Bieberstein
Producing formation Depth to top Bottom Total Depth of Well 3925 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	346 ft.	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud to 700 ft., Set plug at 700 ft. Put 50 sacks cement on top of plug.

Set plug at 300 ft. Put 25 sacks cement on top of plug.

Set plug at 40 ft., Ten sacks cement to surface.

Two sacks cement in Rat Hole.

Handwritten signature and initials

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graves Drilling Co. Inc.
Address 505 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
505 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of January, 1971

My commission expires August 12, 1971

Handwritten signature of Notary Public

Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: CLINTON OIL COMPANY DRILLING COMMENCED: 12-21-70
217 N. Water
Wichita, Kansas DRILLING COMPLETED: 12-31-70

CONTRACTOR: Graves Drilling Co., Inc.
505 Union Center
Wichita, Kansas

CASING RECORD: 8 5/8" Surface Casing LOCATION: 50' West of NW NE SW
set @ 340 Ft. with Sec. 21-T23S-R13W
365 sacks of cement. Stafford County, Kansas

0	-	70	Sand
70	-	210	Shale
210	-	270	Sand
270	-	346	Shale
346	-	747	Red Bed
747	-	775	Anhydrite
775	-	1429	Shale
1429	-	2155	Shale and Shells
2155	-	2178	Lime
2178	-	2376	Shale
2376	-	2778	Shale and Shells
2778	-	2885	Lime
2885	-	2915	Shale
2915	-	3005	Lime
3005	-	3165	Shale
3165	-	3274	Lime
3275	-	3452	Shale
3452	-	3466	Lime
3466	-	3476	Shale
3476	-	3723	Lime
3723	-	3798	Shale
3798	-	3844	Chert
3844	-	3847	Shale
3847	-	3896	Sand
3896	-	3925	Lime
3925	-		Total Depth

RECEIVED
STATE CORPORATION COMMISSION
JAN 7 1971
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that the foregoing statements are true and correct,
to the best of my knowledge.

Graves Drilling Co., Inc.


John C. Graves

John C. Graves

STATE OF KANSAS)
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, on this 45th day
of January, 1971.

My Commission expires: August 12, 1971

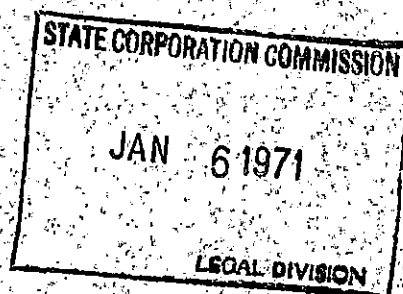

Doris Oglesbee
Doris Oglesbee, Notary Public