

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Stafford County, Sec. 10 Twp. 22S Rge. 13 (E) (W)
NE SE SE

Location as "NE/CNWSW" or footage from lines
Lease Owner Woody's Quality Oil Company
Lease Name Soeken 'A' Well No. 2
Office Address 1119 Cravens Building, Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 21 1964
Application for plugging filed April 21 1964
Application for plugging approved April 21 1964
Plugging commenced April 21 1964
Plugging completed April 21 1964
Reason for abandonment of well or producing formation Dry Hole

NORTH

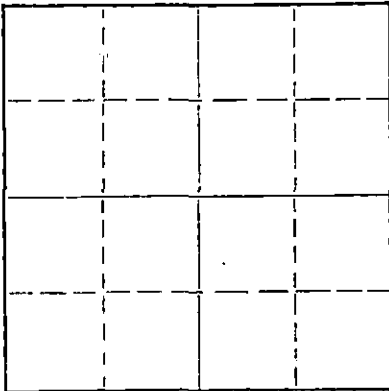

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3875 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	395	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid was up in the hole. First cementing plug and 1/4 sack hulls was pushed to 300 feet and cemented with 25 sacks through the drill pipe. Hole was filled with drilling mud to 40 feet; 2nd cementing plug, bridged solid with hulls and cemented with 10 sacks to base of cellar. Rat and mouse hole bridged and cemented with 5 sacks. Cementing done by Halliburton Cementing Co.

RECEIVED
STATE CORPORATION COMMISSION
AUG 15 1966
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Tommy Ward Drilling Company
Address 609 Liberty Bank Bldg., Oklahoma City, Oklahoma

STATE OF OKLAHOMA, COUNTY OF LINCOLN, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Tommy Ward

(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of August, 1966

My commission expires Feb. 17, 1970

Notary Public.