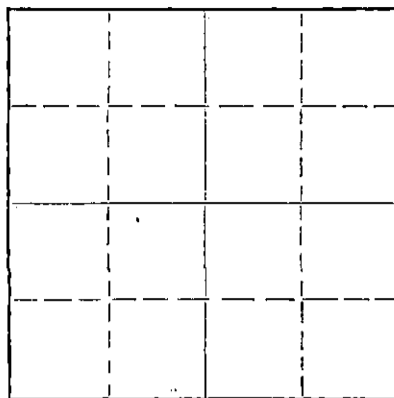


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

NORTH



Locate well correctly on above  
Section Plat

STAFFORD County. Sec. 10 Twp. 22S Rge. 13W (E) (W)  
Location as "NE/CNW&SW&" or footage from lines NW NE SW  
Lease Owner HERMAN GEO. KAISER  
Lease Name HAHN Well No. 3  
Office Address 909 Palace Bldg, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 12-1-57 19  
Application for plugging filed 12-1-57 19  
Application for plugging approved 12-1-57 19  
Plugging commenced 12-1-57 19  
Plugging completed 12-1-57 19  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well \_\_\_\_\_  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3817 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	324	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 300' set wood plug  
& 1/2 sx hulls cemented with 25 sx cement thru drill  
pipe. Filled with heavy mud to 40' set solid plug  
with 10 sx cement up to bottom of cellar.  
Plugging Complete.

12-26-57

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 26 1957  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor K & E DRILLING, INC.  
Address 719 Union Center, Wichita, Kansas

STATE OF ~~XXXXX~~ Oklahoma, COUNTY OF ~~XXXXXXX~~ Tulsa, ss.  
~~XXXXXXXXXX~~ Herman George Kaiser (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Herman Geo. Kaiser  
~~Herman Geo. Kaiser~~ HERMAN GEO. KAISER  
909 Palace Bldg, Tulsa, Oklahoma  
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of December, 19 57  
Frances R. Hitchens  
Frances R. Hitchens Notary Public.

My commission expires June 29, 1960

PLUGGING  
FILE SEC 10 T 22 R 13W  
BOOK PAGE 65 LINE 18

## W E L L      L O G

OPERATOR:	HERMAN GEO. KAISER 909 Palace Bldg. Tulsa, Oklahoma	FARM NAME:	#3 HAHN
CONTRACTOR:	K & E DRILLING, INC. 719 Union Center Bldg. Wichita 2, Kansas	LOCATION:	NW NE SW, Sec. 10-22S-13W Stafford Co, Kansas
CASING:	8-5/8" @ 324 (300 sx)	COMMENCED:	11-21-57
R.T.D.	3817'	COMPLETED:	11-30-57
		PRODUCTION:	D & A
		ELEVATION:	1894' KB

## FORMATION RECORD

Depths shown indicate bottom of formations

Shale	45
Sand	210
Shale	324
Shale & Red Bed	754
Anhydrite	770
Shale & Shells	1565
Lime	2015
Lime & Shale	2240
Shale & Lime	2422
Lime & Shale	2580
Shale & Lime	2930
Lime & Shale	3055
Lime	3241
Shale	3245
Shale & Lime	3370
Lime	3670
Conglomerate	3702
Lime	3817
RT.D	3817

RECEIVED  
STATE CORPORATION COMMISSION


DEC 26 1957

CONSERVATION DIVISION  
Wichita, Kansas


## CERTIFICATION:

STATE OF KANSAS      )  
                                  ) SS:  
COUNTY OF SEDGWICK )

I, Dale Silcott of the K & E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the KAISER #3 HAHN well

  
Dale Silcott

Subscribed and sworn to before me this 9th day of December, 1957.

  
Patricia M. Edwards, Notary Public

My commission expires: 11 August 1958.

