

Rice

# DARLING DRILLING CO.

1211 West 4th Street

MO 2-7901

HUTCHINSON, KANSAS 67501

Dec. 5, 1953

## TEST LOG

Almeda M. Smisor Farm Trust, Sterling, Kansas

### Test #1

Location: Center of W<sub>2</sub>, Sec. 11, Twp 21, Range 8 W, Rice Co.

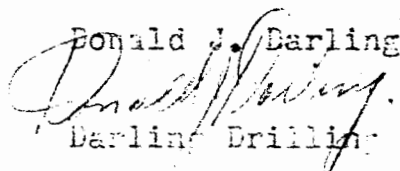
0	-	5	Sandy Soil	Static Level 13 Ft.
5	-	10	Sandy Clay	
10	-	14	Silty Sand	
14	-	41	Coarse Gravel	
41	-	48	Clay	Estimate 1800 GPM
48	-	55	Coarse Gravel	
55	-	60	Med to Fine Gravel	
60	-	72	Coarse Gravel	
72	-	83	Med to coarse Gravel	
83	-	107	Coarse Gravel	
		167	Shale	

### Test #2

Location: Center of SE<sub>4</sub>, Sec 12, Twp21, Range 8 W, Rice Co.

0	-	11	Sandy Soil	
11	-	12	Tight Clay	
12	-	15	Med Sand	
15	-	60	Coarse Gravel	Estimate 1600 GPM
60	-	60 1/2	Clay Layer	
60 1/2	-	80	Coarse Gravel	

I certify that the above information is correct.

Donald J. Darling  
  
 Darling Drilling Co.