
Check: ☐ White Copy, ☐ Blue Copy, ☐ Pink Copy

Sargent Drilling


INDUSTRIAL ENGINEERING
COMPLETE MUNICIPAL, INDUSTRIAL AND AGRICULTURAL
PUMP AND WELL SERVICE

P.O. Box 367
846 S. 13th Street
Geneva, NE 68361-0367

Phone: (402) 759-3902
Toll Free: (888) 496-3902
Fax: (402) 759-4960

MR43 – Section 5

	FROM	TO
Steel Recharge Casing – 4" .337" wall Grade B	0'	40'
Carbon Steel Casing – 18" - .500" wall A53 Grade B	0'	45'
Stainless Steel Casing – 18" - .500" wall ASTM A312	45'	50'
Stainless Steel Screen – 18" - .500" wall .090 slot 304 Stainless	50'	62'
Stainless Steel Casing – 18" - .500" wall ASTM A312	62'	67'
Carbon Steel Casing – 18" - .500" wall A53 Grade B	67'	80'
Stainless Steel Casing – 18" - .500" wall ASTM A312	80'	85'
Stainless Steel Screen - 18" - .500" wall .050 slot 304 Stainless	85'	115'
Stainless Steel Casing – 18" - .500" wall ASTM A312	115'	120'

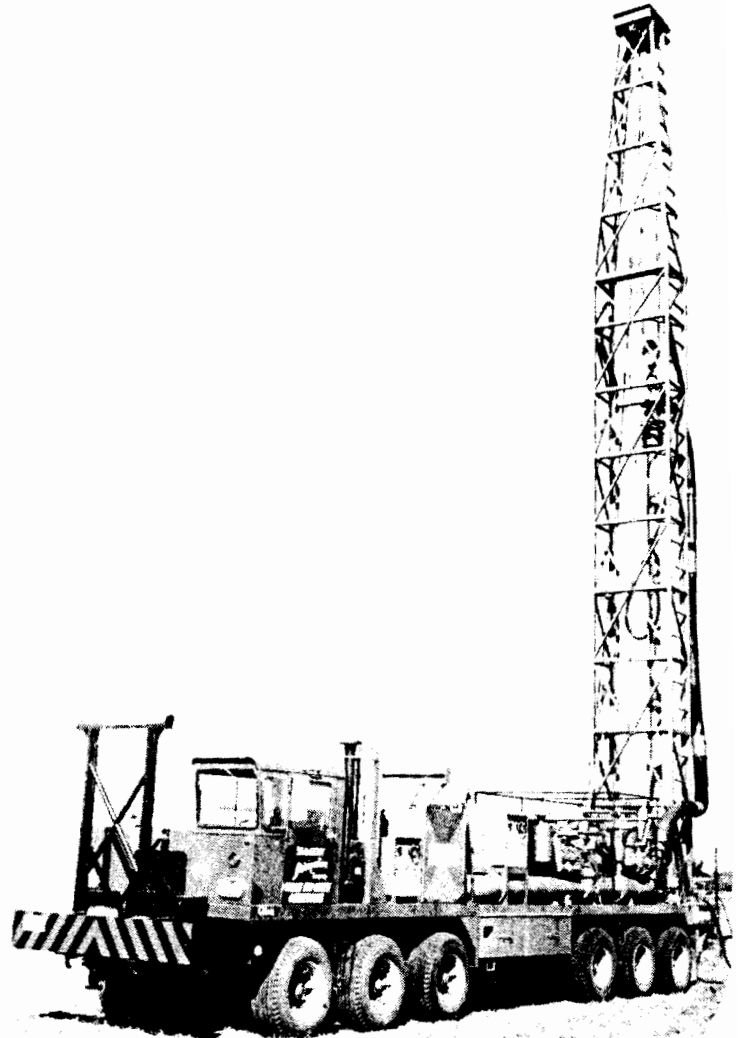

Sargent Drilling
INDUSTRIAL ENGINEERING
COMPLETE MUNICIPAL AND INDUSTRIAL
WELL AND PUMP SERVICE

PO Box 367
Geneva, NE 68361-0367

846 South 13th St.

Phone: (402) 759-3902
1-888-496-3902

TEST HOLE LOG

CUSTOMER: City of Wichita	
WELL ID: MR-43	
LOCATION: SE ¼ SE ¼ SE ¼ SE ¼, 11-T24S-R3W, Harvey Co., KS	
LATITUDE: 37° 58' 15.7"	
LONGITUDE: 097° 36' 39.2"	
FOOTAGES: 141' from the South section line and 158' from the East section line.	
DATE: 10-13-09	DRILLED BY: Dave

SWL:
PWL:

<u>from feet</u>	<u>-</u>	<u>to feet</u>	
0		3	Topsoil
3		10	Clay
10		26	Medium gravel
26		46	Clay
46		63	Medium gravel
63		84	Clay
84		115	Medium gravel
115		120	Clay