
Check: ☐ White Copy, ☐ Blue Copy, ☐ Pink Copy

Sargent Drilling


INDUSTRIAL ENGINEERING
COMPLETE MUNICIPAL, INDUSTRIAL AND AGRICULTURAL
PUMP AND WELL SERVICE

P.O. Box 367
846 S. 13th Street
Geneva, NE 68361-0367

Phone: (402) 759-3902
Toll Free: (888) 496-3902
Fax: (402) 759-4960

MR44 – Section 5

	FROM	TO
Steel Recharge Casing – 4" .337" wall Grade B	0'	40'
Carbon Steel Casing – 18" - .500" wall A53 Grade B	0'	55'
Stainless Steel Casing – 18" - .500" wall ASTM A312	55'	60'
Stainless Steel Screen – 18" - .500" wall .090 slot 304 Stainless	60'	95'
Stainless Steel Casing – 18" - .500" wall ASTM A312	95'	100'

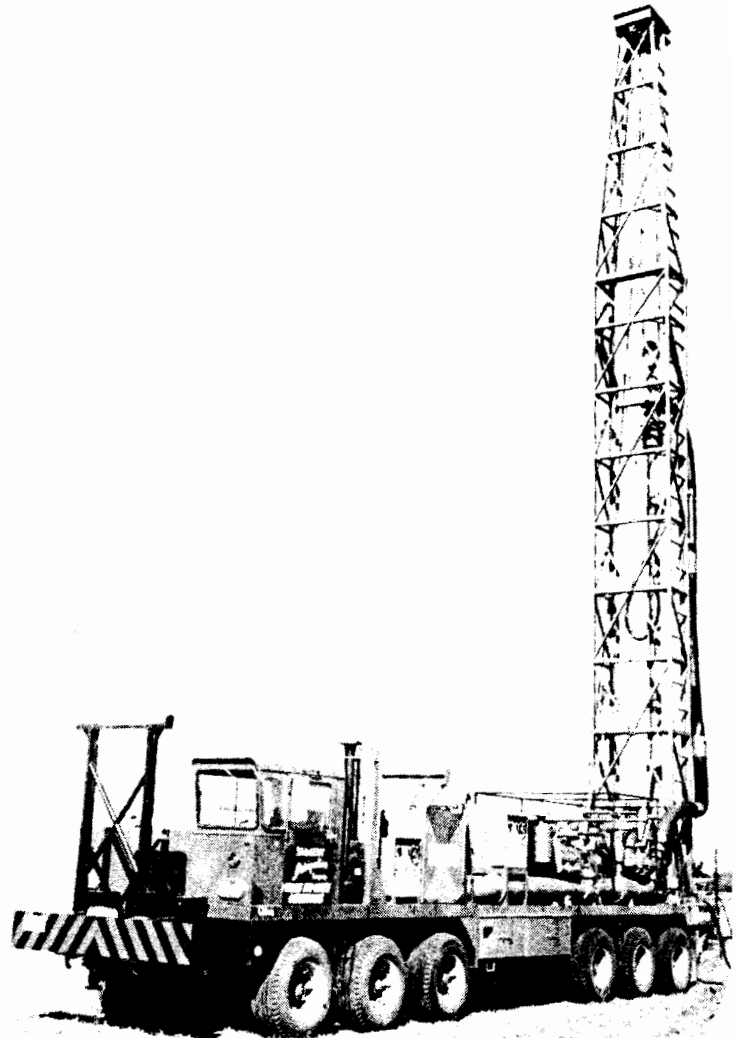

Sargent Drilling
INDUSTRIAL ENGINEERING
COMPLETE MUNICIPAL AND INDUSTRIAL
WELL AND PUMP SERVICE

PO Box 367
Geneva, NE 68361-0367

846 South 13th St.

Phone: (402) 759-3902
1-888-496-3902

TEST HOLE LOG

CUSTOMER: City of Wichita	
WELL ID: MR-44	
LOCATION: NE ¼ NE ¼ NE ¼ SE ¼, 23-T24S-R3W, Harvey Co., KS	
LATITUDE: 37° 56' 53.3"	
LONGITUDE: 097° 36' 38.8"	
FOOTAGES: 2473 feet from the South section line and 76 feet from the East section line.	
DATE: 10-13-09	DRILLED BY: Dave

SWL:
PWL:

<u>from feet</u>	<u>-</u>	<u>to feet</u>	
0		3	Topsoil
3		25	Medium gravel
25		56	Clay
56		96	Fine gravel
96		103	Clay
103		133	Fine sand
133		140	Clay