
Check: ☐ White Copy, ☐ Blue Copy, ☐ Pink Copy

Sargent Drilling


INDUSTRIAL ENGINEERING
COMPLETE MUNICIPAL, INDUSTRIAL AND AGRICULTURAL
PUMP AND WELL SERVICE

P.O. Box 367
846 S. 13th Street
Geneva, NE 68361-0367

Phone: (402) 759-3902
Toll Free: (888) 496-3902
Fax: (402) 759-4960

MR18 – Section 5

	FROM	TO
Steel Recharge Casing – 4" .337" wall Grade B	0'	47'
Carbon Steel Casing – 18" - .500" wall A53 Grade B	0'	50'
Stainless Steel Casing – 18" - .500" wall ASTM A312	50'	55'
Stainless Steel Screen – 18" - .500" wall .050 slot 304 Stainless	55'	75'
Stainless Steel Casing - 18" - .500" wall ASTM A312	75'	80'
Carbon Steel Casing - 18" - .500" wall A53 Grade B	80'	90'
Stainless Steel Casing – 18" - .500" wall ASTM A312	90'	95'
Stainless Steel Screen – 18" - .500" wall .050 slot 304 Stainless	95'	115'
Stainless Steel Casing – 18" - .500" wall ASTM A312	115'	120'
Carbon Steel Casing - 18" - .500" wall A53 Grade B	120'	131'
Stainless Steel Casing – 18" - .500" wall ASTM A312	131'	136'
Stainless Steel Screen – 18" - .500" wall .050 slot 304 Stainless	136'	175'
Stainless Steel Casing – 18" - .500" wall ASTM A312	175'	180'

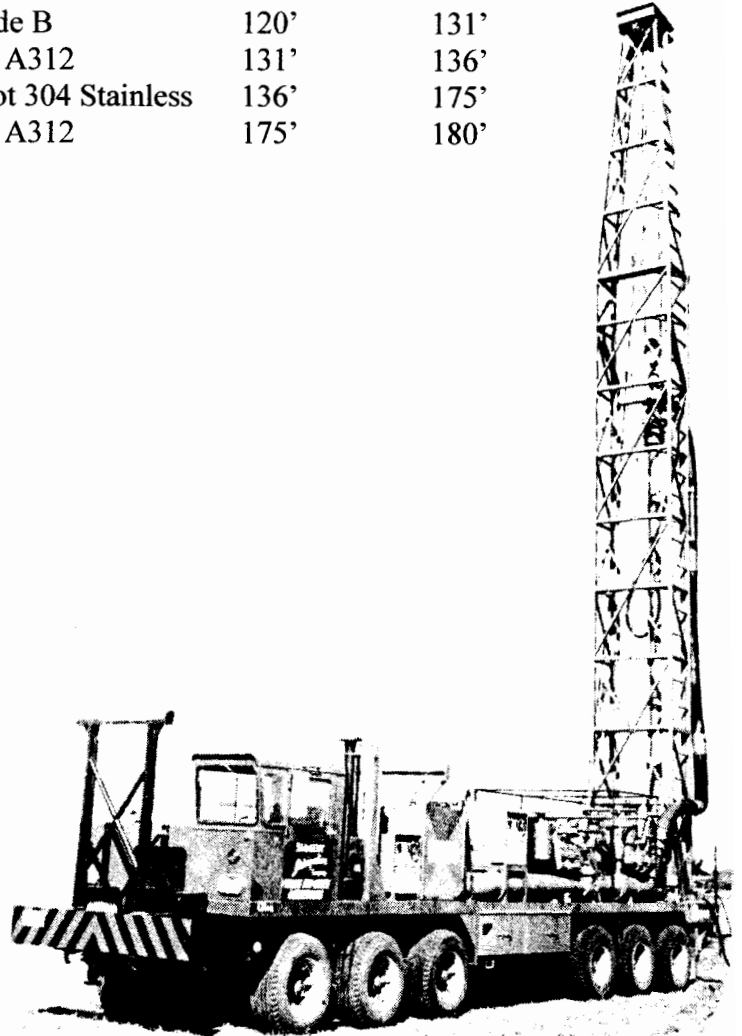

Sargent Drilling Co.
INDUSTRIAL ENGINEERING
COMPLETE MUNICIPAL AND INDUSTRIAL
PUMPS AND WELL SERVICE

PO Box 627
HC 74, Box 28

Broken Bow, Nebraska
68822

Phone (308) 872-5125
Fax (308) 872-3050

TEST WELL LOG
CITY OF WICHITA, KS
TEST HOLE – MR18
SEPTEMBER 12, 2009

N 37° 57' 46.4" – W 097° 32' 15.8"

NE ¼, NE ¼, NE ¼, SE ¼, Section 16, Township 24 South, Range 2 West
(2544' North of South Line, 149' West of East Line)

0	10	Topsoil, Clay
10	40	Fine to Medium to Coarse Sand, Fine to Medium Gravel
40	75	Fine to Medium to Coarse Sand, Fine Gravel
75	80	Tan Clay
80	93	Clay
93	115	Fine to Medium to Coarse Sand, Fine Gravel
115	120	Clay
120	140	Fine to Medium to Coarse Sand, Clay Layers
140	160	Fine to Medium to Coarse Sand, Fine Gravel with Clay Layers
160	175	Fine to Medium to Coarse Sand, Fine to Medium Gravel
175	190	Shale