




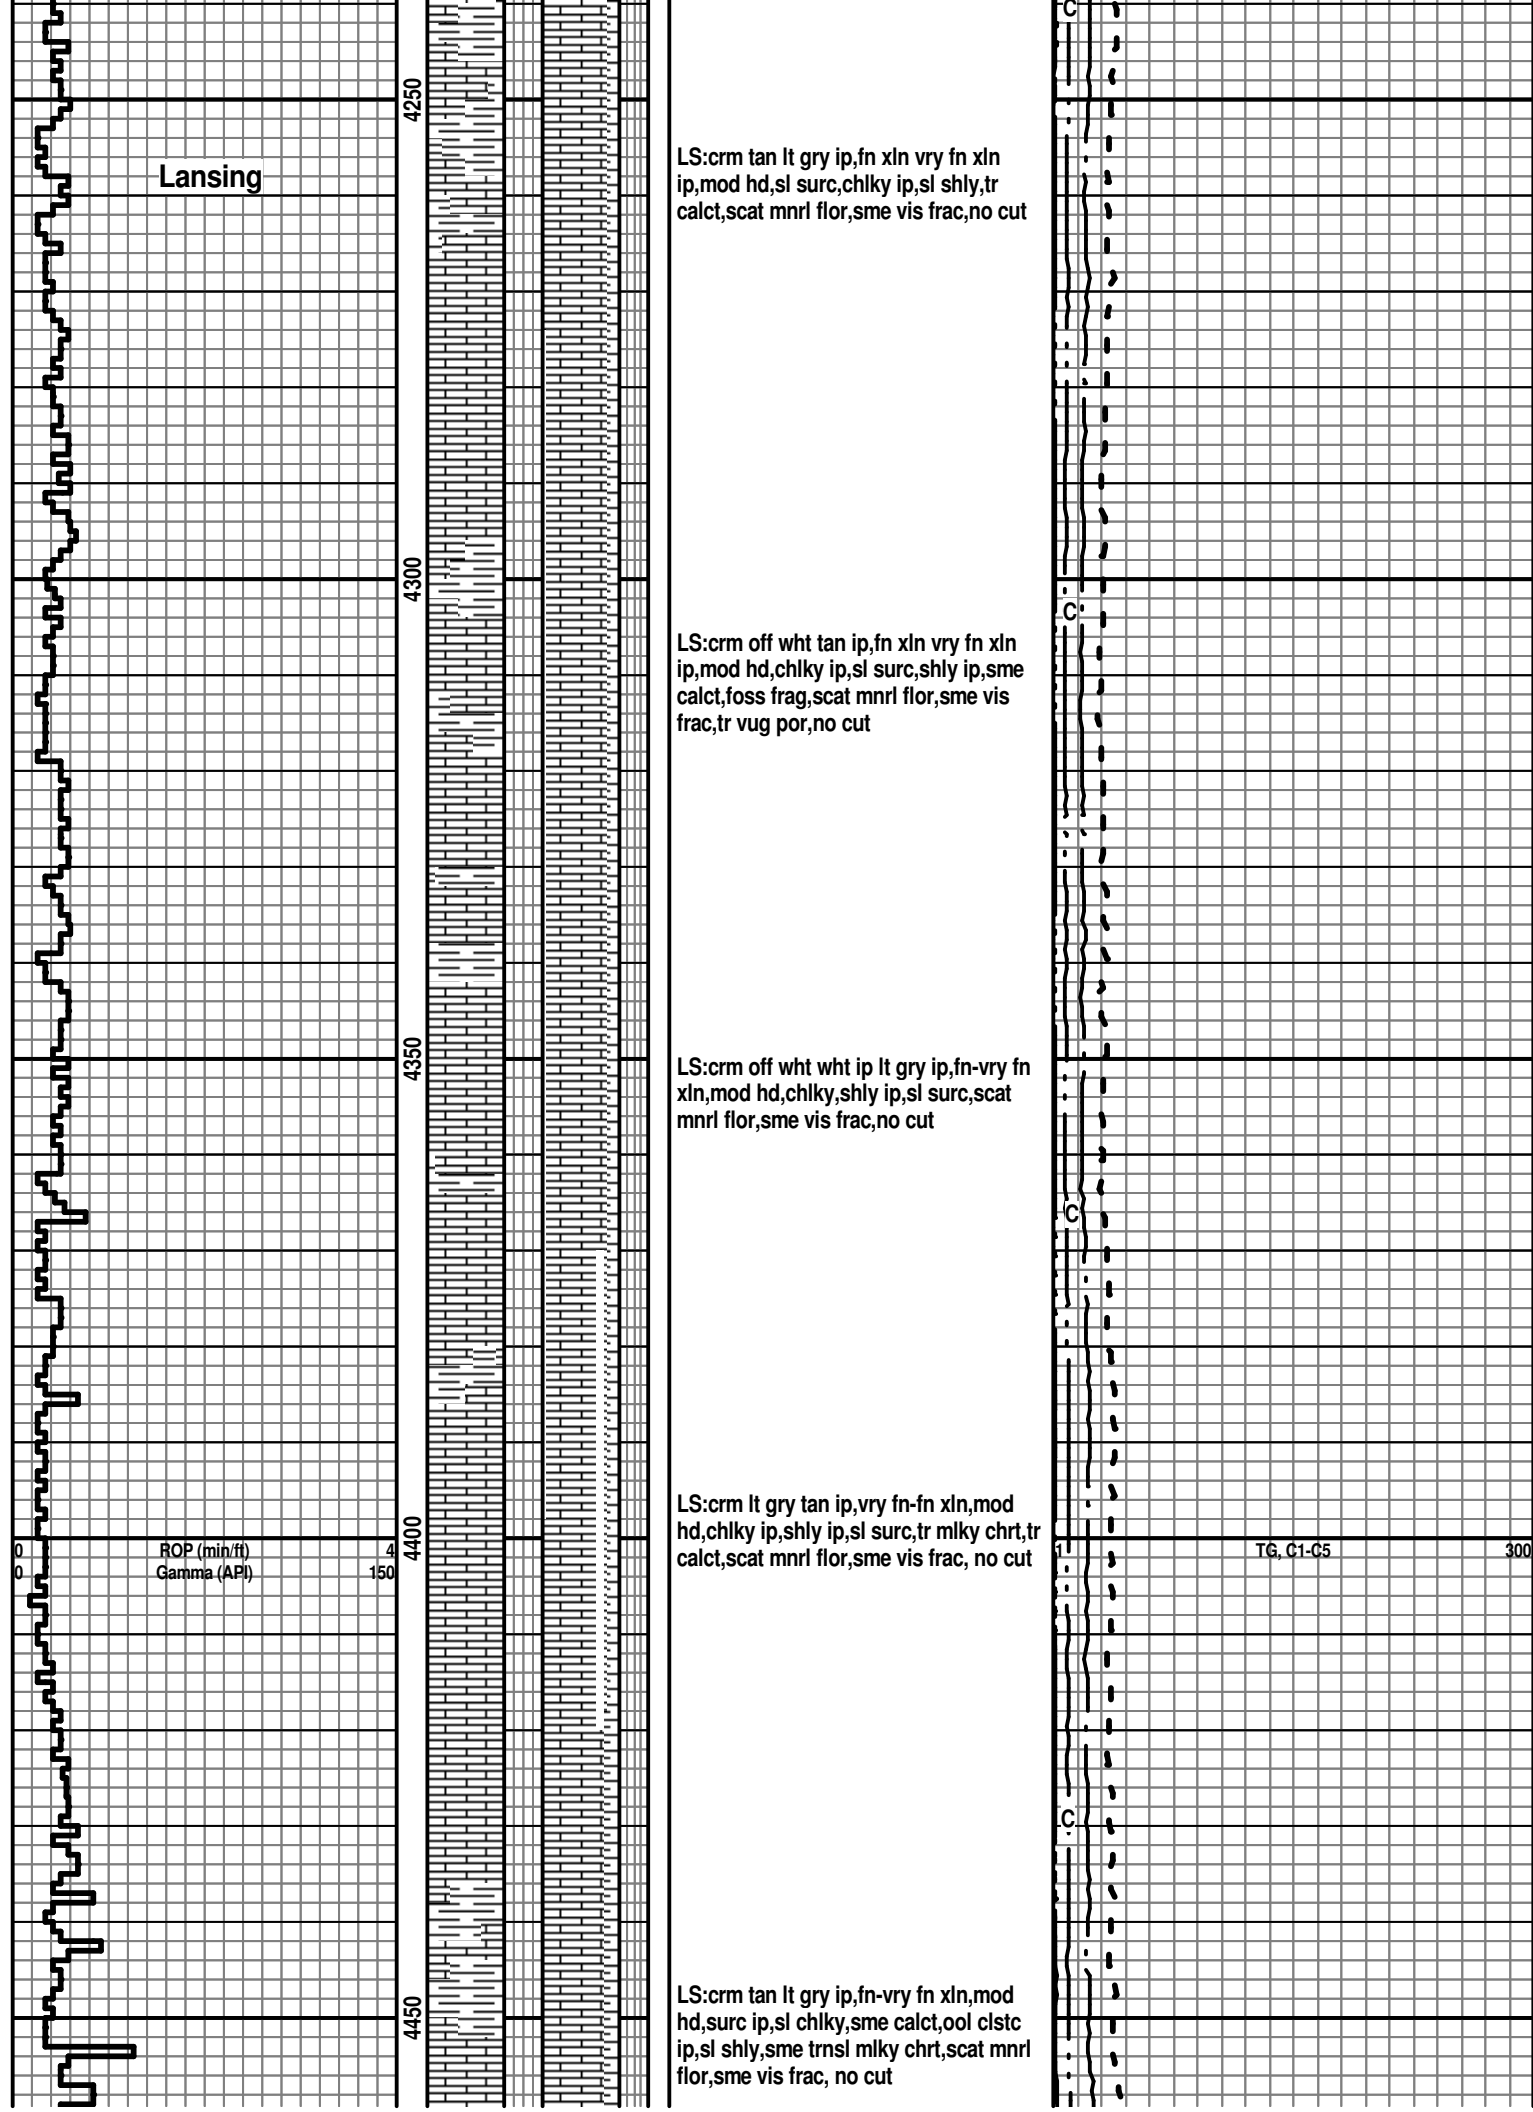

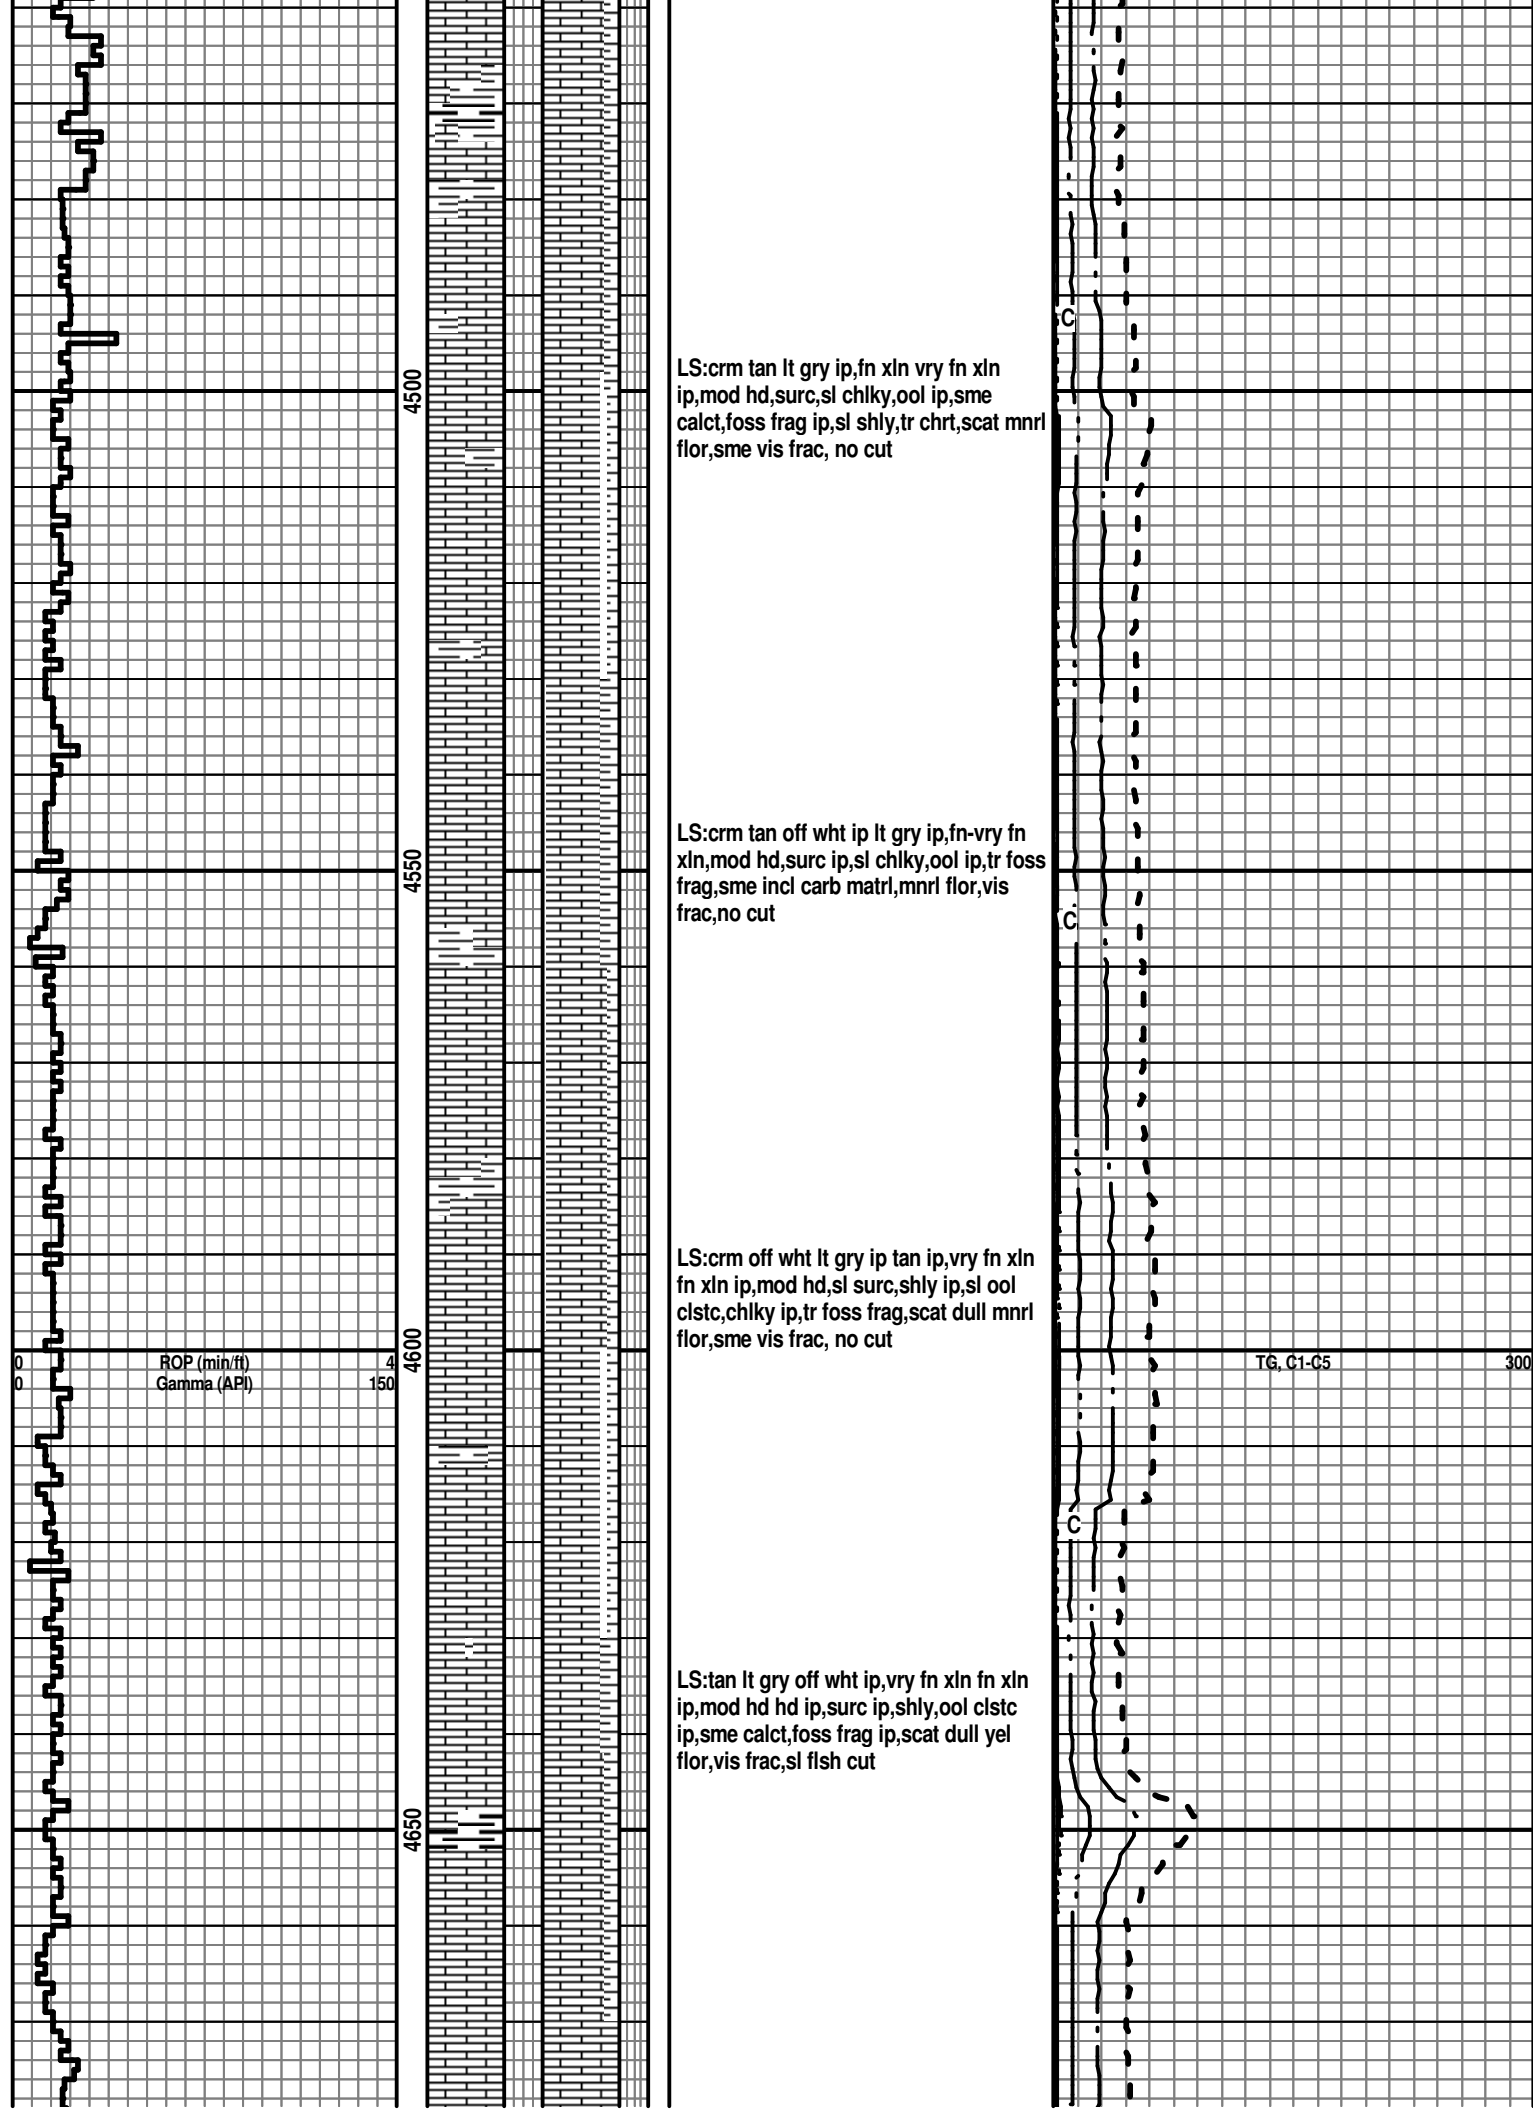

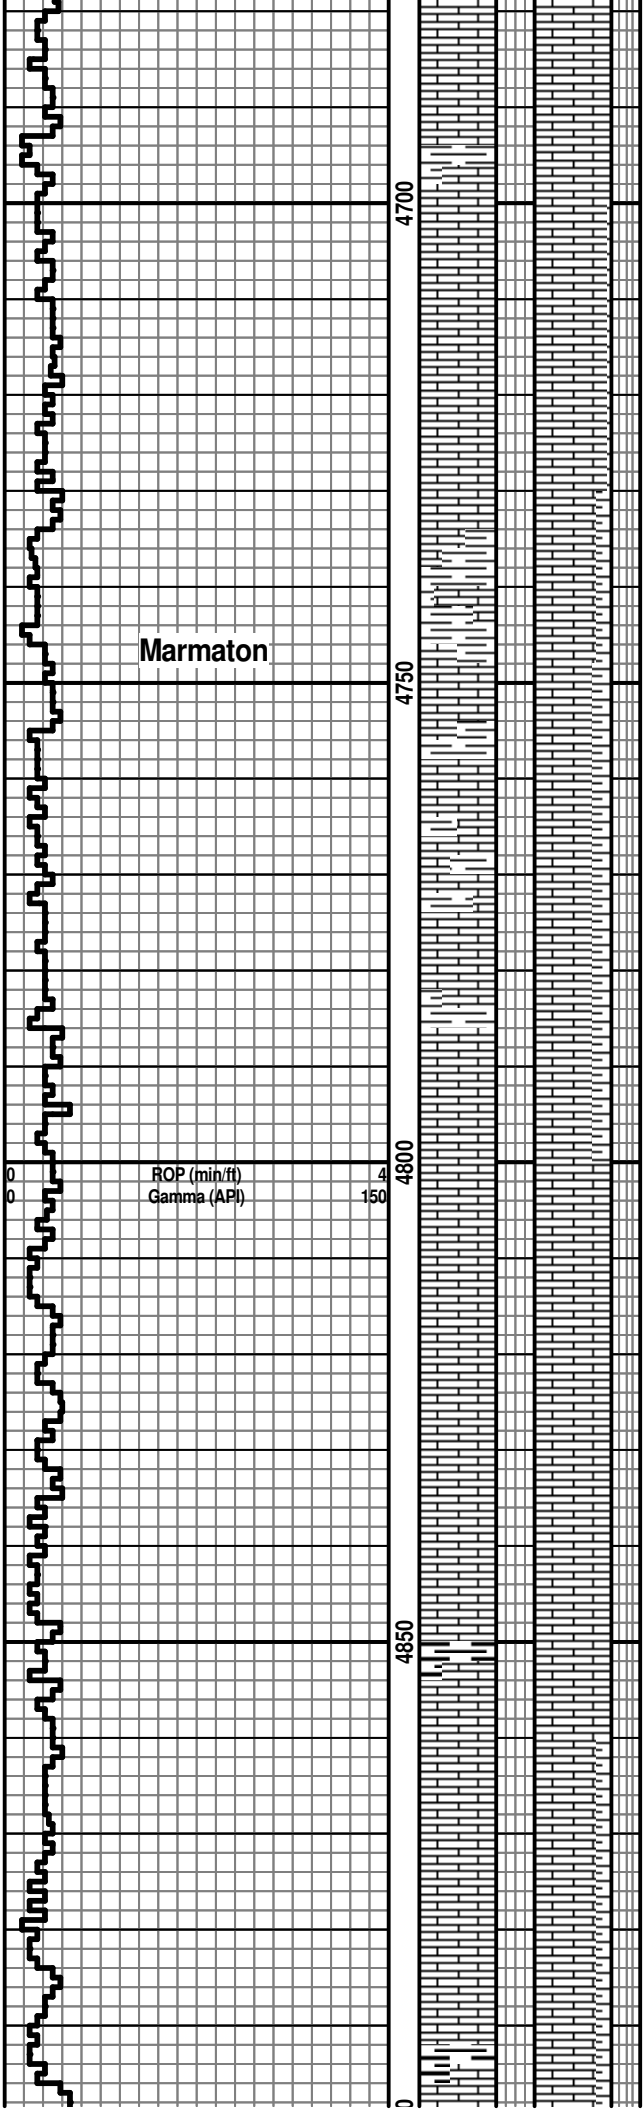


LS:tan crm lt brn,vry fn xln fn xln
ip,mod hd hd ip,sl chlky,shly ip,tr
calct,sl ool,scat mnrl flor,sme vis frac,
no cut


LS:tan crm lt brn ip lt gry ip,vry fn xln fn
xln ip,mod hd hd ip,shly ip,sl surc,tr
ool,tr calct,scat dull mnrl flor,sme vis
frac,no cut

LS;crm tan lt brn ip,vry fn xln fn xln
ip,mod hd hd,shly,sl surc,tr calct,scat
mnrl flor,sme vis frac, no cut

LS:tan crm off wht ip lt gry ip,vry fn xln
fn xln ip,mod hd hd ip,sl chlky,shly ip,sl
surc,sme foss frag,mnrl flor,sme vis
frac,no cut

LS:tan lt brn crm ip,vry fn xln fn xln
ip,mod hd hd,shly ip,sl surc,sme ool,sl
chlky,tr glauc,sme incl pyr,scat dull yel
flor,sme vis frac, no cut

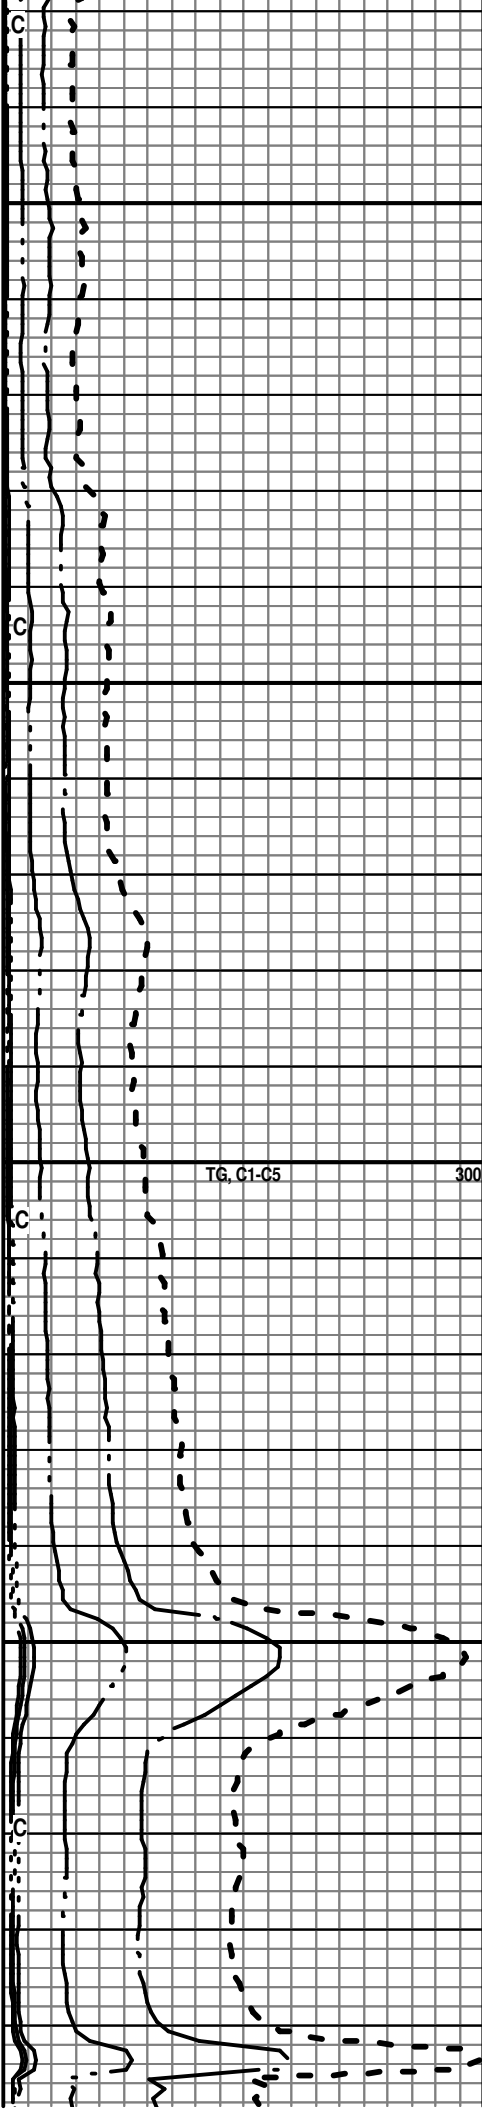

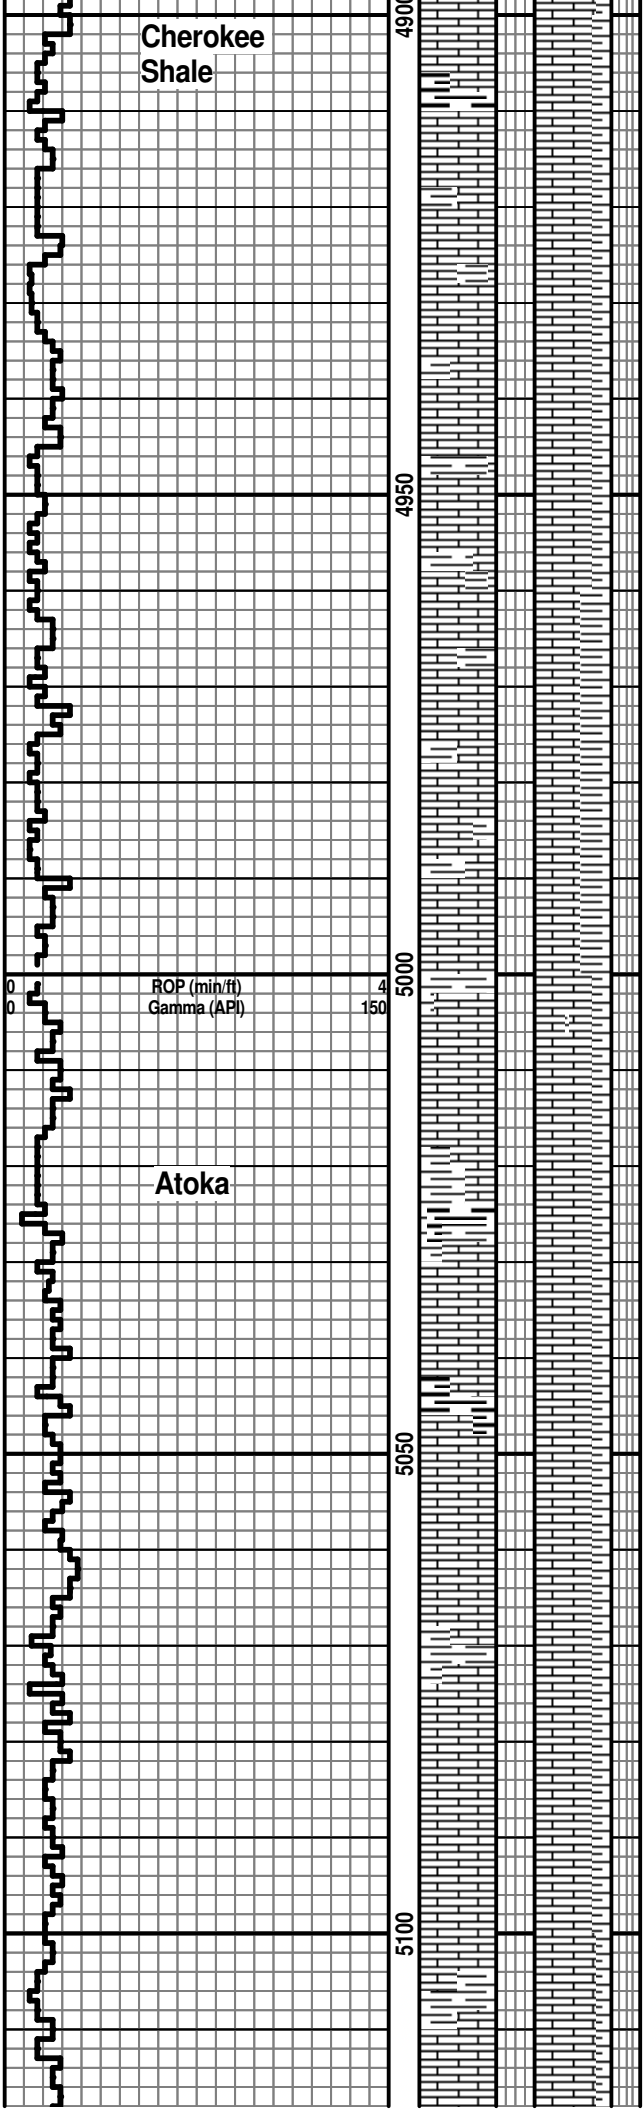

Cherokee
Shale

Atoka

LS:crm tan lt brn ip,vry fn xln fn xln
ip,mod hd hd,sl chlky,shly ip,sme
calct,tr glauc,sl surc,tr foss frag,sme
desm pyr,scat dull yell flor,sme vis
frac,no cut


LS:crm tan lt brn ip,vry fn xln fn xln
ip,mod hd hd ip,surc ip,shly,tr ool
clstc,sl chlky,scat mnrl flor,sme vis frac,
no cut


LS:tan crm lt brn ip,vry fn xln fn xln
ip,mod hd hd ip,shly ip,sl surc,tr foss
frag,tr calct,scat mnrl flor,sme vis
frac,no cut

LS:brn lt gry gry,vry fn xln,hd-mod hd,sl
chlky,sme incl pyr,foss frag ip,shly,scat
dull mnrl flor,sme vis frac, no cut

LS:tan lt brn lt gry ip,vry fn xln,hd-mod
hd,shly,tr foss frag,sme lt brn chrt,tr
pyr,scat dull mnrl flor,sme vis frac,no
cut

LS:tan off wth brn ip,vry fn xln fn xln
ip,mod hd-hd,sl chlky,shly,sme incl
pyr,sme foss frag,tr calct,scat mnrl
flor,sme vis frad, no cut

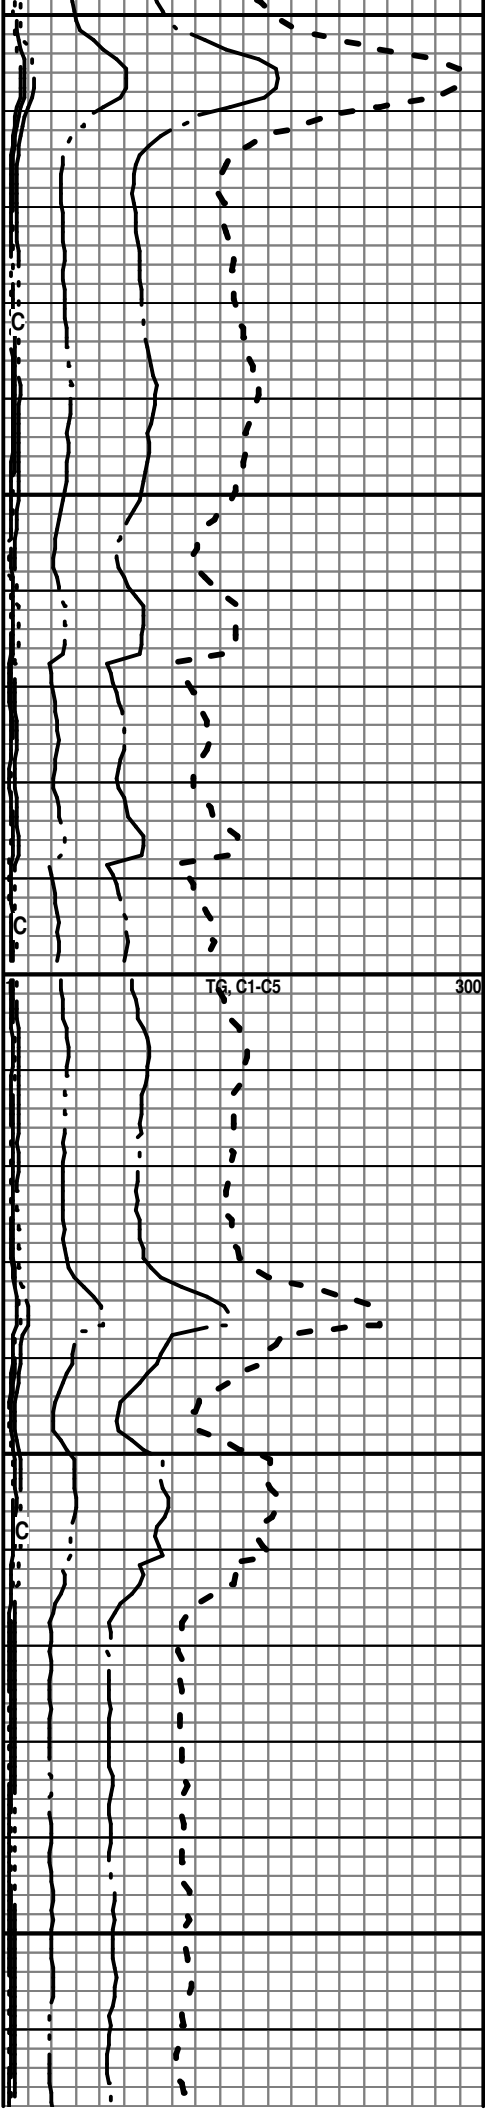

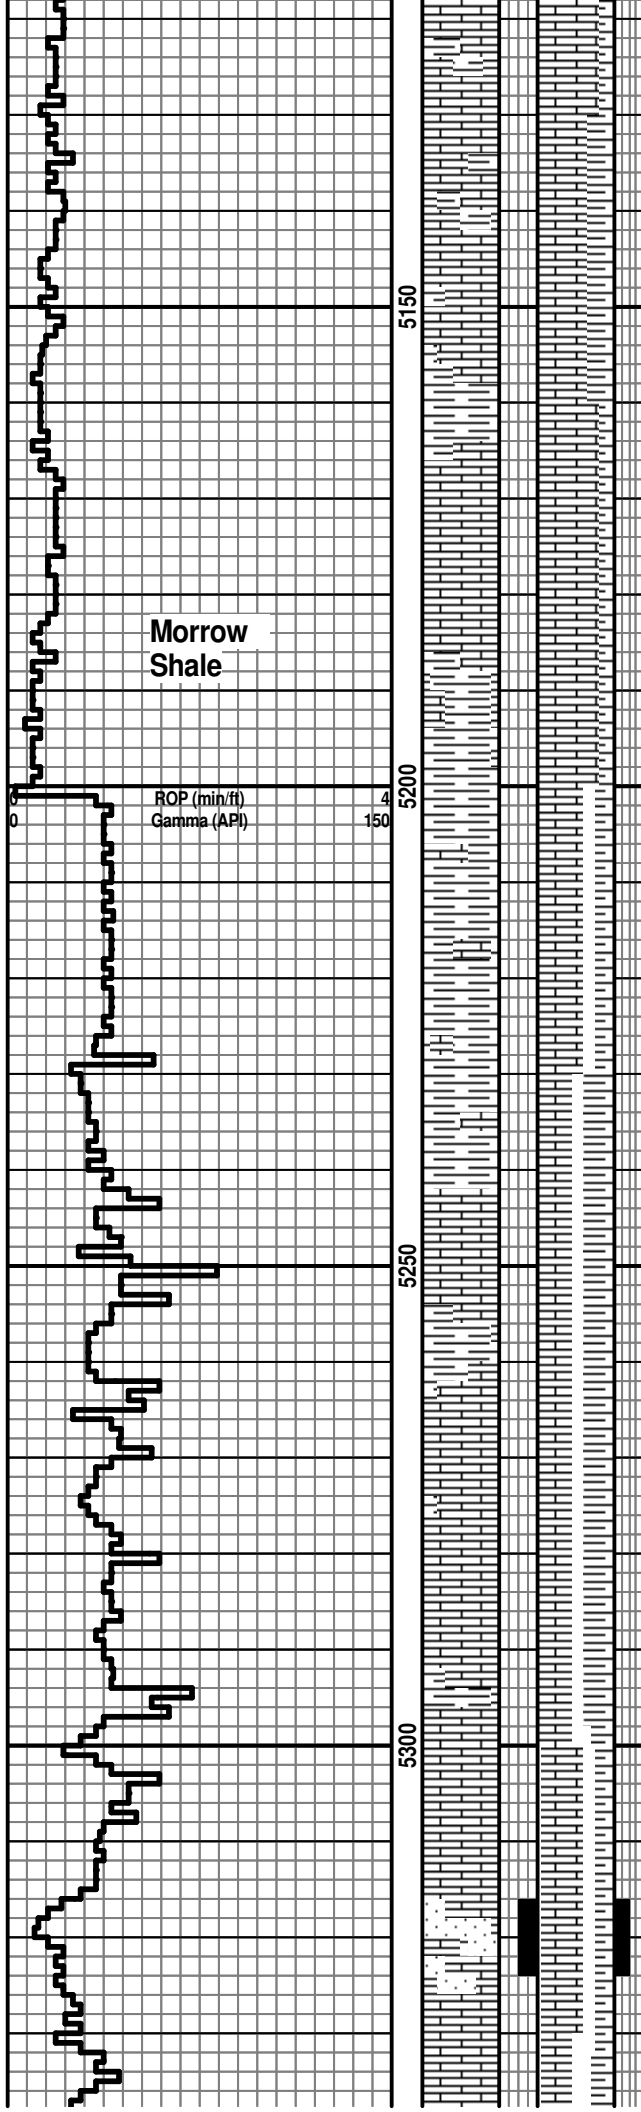

Morrow
Shale

LS:tan off wht lt gry ip,vry fn xln,mod
hd hd,shly,sl surc,desm pyr,scat dull
mnrl flr,sme vis frac,no cut

LS:tan brn crm ip lt gry ip,vry fn
xln,hd-mod hd,shly,sme brn chrt,tr
pyr,scat dull mnrl flr,no vis por,no cut

SH:dk gry med gry ip,fn txt vry fn txt
ip,firm brit ip,calc grndg to lmy,sme
desm pyr,blky plty ip

LS:tan brn off wht gry ip,vry fn xln fn
xln ip,hd-mod hd,shly,sme pyr,sl
surc,sme foss frag,slty sl sdy,scat crs
clr qtz grns,tr calct,scat dull yel flr,sme
vis frac,no cut

LS:tan off wht lt brn ip,fn xln vry fn xln
ip,hd-mod hd,shly ip,sl surc,sme foss
frag,desm pyr,sl chlky,scat dull yel
flr,sme vis frac,no cut w/SS:brn clr
ip,fn grn vry fn grn ip,subrmd subang
ip,med srtd sme well srtd,med con sme
prly con,calc ip,sl shly,scat vel flr,vry

