


Jameson Oil & Gas Co.
 APR 15-11-13 24085-00-00
 GEOLGISTS REPORT
 DRILLING TIME AND SAMPLE LOG

OPERATOR GICK WELLS
 LEASE GICK WELL NO. 8
 ELEVATION 2033

FIELD BARRY
 LOCATION N2 NW SW SW
 SEC. 1 TWP. 9S RGE. 19W
 COUNTY Rocks STATE KANSAS

CONTRACTOR DUKE DRILLING RIG #10
 COMM. DATE 1-17-2013
 WFO 3-17-2013
 SAMPLES SWED FROM 2500 TO 3477
 DRILLING TIME KEPT FROM 2500 TO 3477
 SAMPLES EXAMINED FROM 2500 TO 3477
 GEOLGICAL SUPERVISION FROM 2500 TO 3477
 WFO UP 2900 TYPE WELD CHEMICAL


FORMATION TOP LOG BOTTOM SURFACE STRATIGRAPHIC UNIT
 ANHYDRITE 1448 (500) 1453 (511) NA
 TORONTO 2932 (888) NA
 HEERNA 3174 (1170) NA
 TORONTO 3174 (1150) NA
 LANSING 3214 (1170) NA
 HUSTANCHEW SHALE 3456 (1112) NA
 B/KANSAS CITY 3453 (1399) NA
 ARCHER 3456 (1112) NA

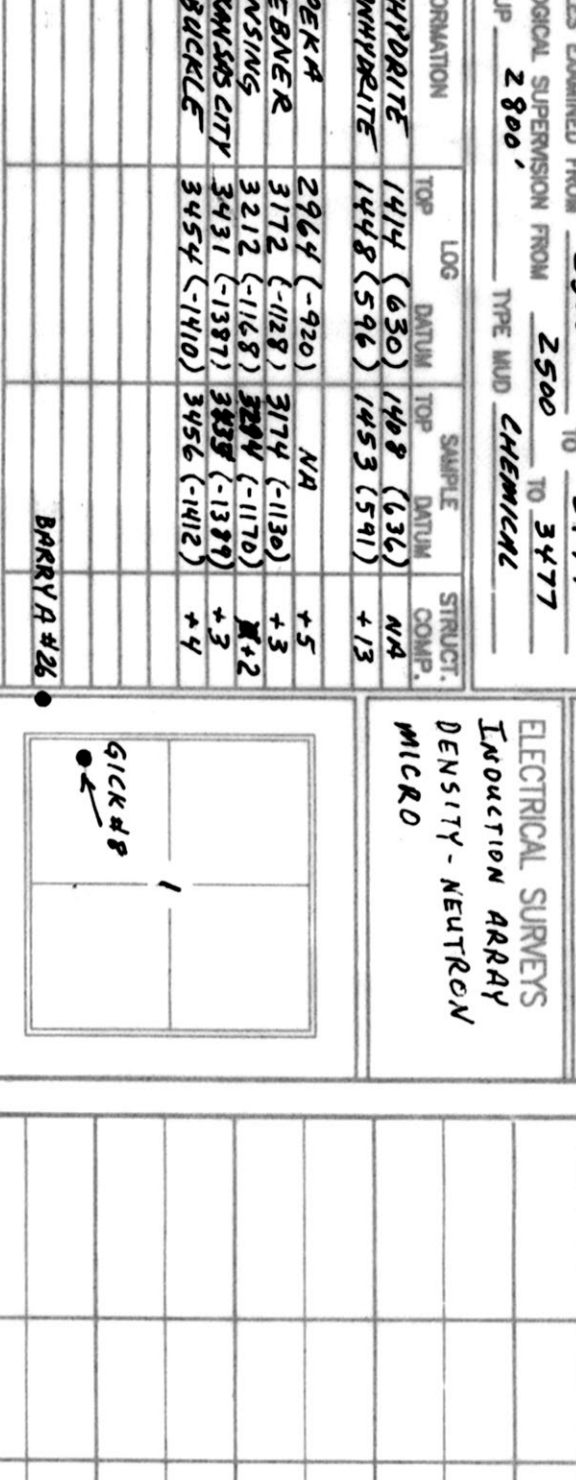

REFERENCE WELL FOR STRATIGRAPHIC COMPARISON
 BARRY A #26 330' EST. 330' REL. SEC 2-9S-19W

DATE	DEPTH	NO	SIZE	TYPE	DEPTH (FEET)	REMARKS
1-5-2013	5040					
1-6-2013	1155					
1-7-2013	1422					
1-8-2013	2183					
1-9-2013	2810					
1-10-2013	3455					
1-11-2013	3177					

LEGEND

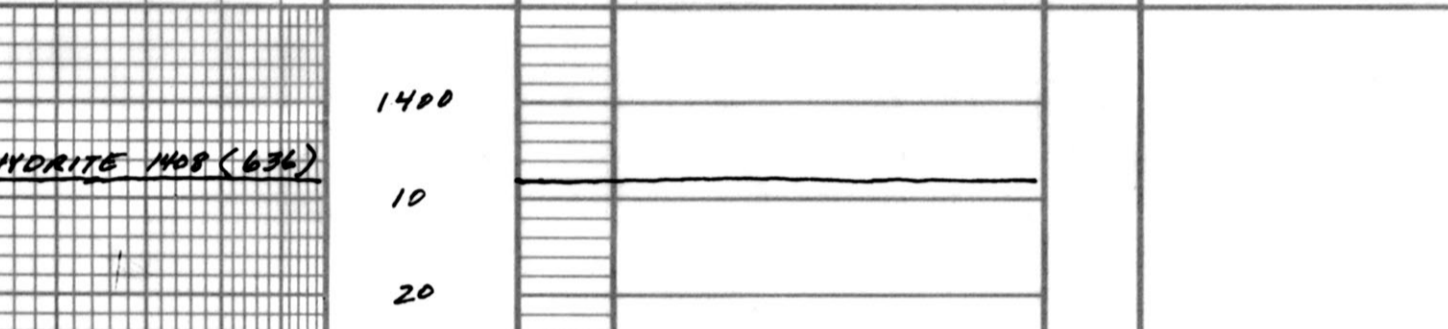

DEPTH	LITHOLOGY	SAMPLE DESCRIPTIONS	OIL SHOWS	REMARKS
1400				
10				
20				
30				
40				
50				
60				
70				
2500		SH: reddish brn, var. clod.		
10				
20				
30		LS: tan, v. xln, NS		
40		SH: mostly reddish brn.		
50				
60				
70				
80				
90		LS: tan-1/4 brn, f. xln, inter xln @ NS		
2600		SH: gry, f, med, p. fly.		
10				
20		LS: tan, f, med xln, ool, inter xln @ NS		
30		SH: gry, med, p. fly, reddish brn		
40		LS: lt tan, f, med xln, inter xln @ NS		
50		SH: gry, med, p. fly.		
60		LS: tan, f, med xln, inter xln @ NS		
70		SH: gry, med, p. fly-6/ky		
80				
90		SH: gry-drk gry, med p. fly-6/ky.		
2700				
10				
20				
30				
40		LS: tan-1/4 gry, med xln, inter xln @ NS		
50		LS: tan, f-med xln, NS		
60		SH: gry, f, med, p. fly marly.		
70				
80		SH: gry, med, 6/ky.		
90				
2800		LS: tan-1/4 gry, f, med xln, inter xln @ NS		
10		SH: gry		
20		LS: tan, f, med xln, inter xln @ NS		
30		SH: gry, var. clod, some pyrite xln, p. fly.		
40		LS: tan, f-med xln, inter xln @ NS		
50		SH: gry, reddish brn.		
60		SH: gry-drk gry, med p. fly.		
70				
80		LS: tan, f, med xln, ool, inter xln @ NS		
90		SH: gry, med, p. fly.		
2900				
10		LS: tan-1/4 gry, drk in NS.		
20		SH: gry, med, p. fly.		VIS 50 WT 8.6 LCM 2 1/2 #
30				
40		LS: tan-1/4 gry, f, med xln, med, inter xln @ NS		
50		LS: gry, sme drk gry, f, med, inter xln @ NS		Note: The Topek is 38' high to the Barry A #2 called the office to verify. Re-on the tally board. The rig added a jt. of drill pipe twice @ 1553'
60		SH: gry, med, p. fly-splinty.		
70		LS: tan-drk gry, f, med, inter xln @ NS		
80		SH: gry, sme reddish brn, p. fly-6/ky.		VIS 54 WT 8.7 LCM 1 # Added 10 ass hulls
90		LS: gry, med xln, ool, inter xln @ NS		
3000				
10		LS: tan-1/4 gry, f, med xln, inter xln @ NS		
20		SH: gry, sme drk gry-6/ky, 6/ky.		
30				
40		SH: SAB.		
50		LS: gry-drk gry, f, med xln, ool, inter xln @ NS		
60				
70		SH: gry, med, p. fly.		
80				
90				
3100				
10				
20				
30				
40		LS: lt gry, f, med xln, some pyrite xln, inter xln @ NS		
50		LS: lt gry-gry, f, med xln, inter xln @ NS, shad, drk sply sta.		VIS 55 WT 8.8 LCM 2 #
60				
70				
80				
90				
3200				
10		LS: tan-1/4 tan, f, med xln, med, inter xln @ NS, 55FO, No odor, lt drk sply sta.		
20		SH: gry, med, p. fly.		
30		LS: lt tan, f, med xln, med, inter xln @ NS, 55FO, No odor, lt drk sply sta.		
40		LS: tan, f, med xln, med, inter xln @ NS, 55FO, No odor, lt drk sply sta.		VIS 55 WT 8.8 LCM 2 #
50		SH: lt gry, med, p. fly-6/ky.		
60				
70		LS: tan, f, med xln, inter xln @ NS.		
80		LS: lt tan, f, med xln, ool, inter xln @ NS, 55FO, No odor, lt drk sply sta.		
90		SH: gry-drk gry, sme 6/ky, p. fly.		
3300				
10		LS: tan, f, med xln, inter xln @ NS.		
20		LS: tan, f, med xln, ool, inter xln @ NS, 55FO, No odor, lt drk sply sta.		
30		LS: tan, f, med xln, ool-weathered, NS.		
40		SH: lt gry, sme lt brn, pyrite xln, p. fly-6/ky.		
50		LS: tan, f, med xln, inter xln @ NS.		
60		SH: gry		
70		LS: lt tan-1/4 tan, ool, inter xln @ NS, 55FO, No odor, lt drk sply sta.		
80		SH: gry LS: tan, f, med xln, vuggy, inter xln @ NS, 55FO, No odor, lt drk sply sta.		
90		SH: gry SH: blk, carb, 6/ky SH: gry, med, p. fly-6/ky		
3400				
10		LS: tan, f, med xln, vuggy, inter xln @ NS, 55FO, No odor, lt drk sply sta.		
20		SH: blk, carb, 6/ky. SH: gry LS: tan, med xln, NS SH: mostly gry, sme reddish brn.		VIS 54 WT 8.9 LCM 6 #
30				
40				
50				
60		NO ARCHER SAMPLES.		
70				
80				
3477				Lost returns @ 3477'