

LITHOLOGY STRIP LOG
WellSight Systems

Scale 1:240 (5"=100') Imperial
Measured Depth Log

Well Name: Eagle Creek Corporation Decker #1-20
Location: Approx NE NE NW SE Section 20-T17S-R34W
License Number: API #15-171-21018
Spud Date: January 15, 2014
Surface Coordinates: 2355' FSL & 1556' FEL Section 20-T17S-R34W
Region: Scott Co., KS
Completed: January 26, 2014

Bottom Hole Coordinates:
Ground Elevation (ft): 3081 K.B. Elevation (ft): 3090
Logged Interval (ft): 3600 To: 4950 Total Depth (ft): 4950
Formation: Mississippian RTD 4950 (-1860), LTD 4954 (-1864).
Type of Drilling Fluid: Chemical Displace @ 3556'
Printed by WellSight Log Viewer from WellSight Systems 1-800-447-1534 www.WellSight.com

OPERATOR

Company: Eagle Creek Corporation
Address: 8100 East 22nd Street North
Building 1500 Suite A
Wichita, Kansas 67226

GEOLOGIST

Name: Mikeal K. Maurie
Company: Consulting Petroleum Geologist - Kansas Licensed No. 210
Address: Wichita, Kansas

COMMENTS

Surface Casing: Spud @ 3:00 pm on 1-15-2014. 1-15-2014. Set 8 5/8" surf casing @ 277'. Cmt w/180sxs of comm 3%cc & 2% gel. PD @ 9:00 pm 1-15-2014

Production Casing: Set 5 1/2" @ 4930' w/165sxs on bottom. DV tool @ 2409', cemented top stage w/ 425sxs.

Deviation Surveys: 1 @ 281', 1 @ 4260'

Pipe Straps: Pipe Strap @ 4260'. Board 4282.12'. Strap 4278.94'. Strap Short to Board 3.18'.

Rig: Val Energy, Inc Rig 4
Bit Record:
Bit #1 12 1/4" RR in @ GL, out @ 281'.
Bit #2 7 7/8" HA20Q JZ in @ 281', out @ 4950'.

Gas Detector: None
Mud System: Mud-Co/Service Mud Inc.


DSTs: Trilobite Testing Inc.

OH Logs: Nabors Completion & Production Services Co.
DIL/MEL, CDL/CN/PE, SONIC

Note: Correlation of the OH Log with the Rotary drilling time indicates the OH Log depths are approximately 3 feet low to the Rotary drilling depths. The Gamma Ray curve on this report has been adjusted 3 feet uphole, to correlate with the drilling time curve.

OH Log Formation Tops: Anhydrite 2384 (+706), Base Anhydrite 2404 (+670), Stotler 3575 (-485), Heebner 3963 (-873), Lansing 4010 (-920), Muncie Creek Sh 4193 (-1103), Stark Sh 4297 (-1207), BKC 4420 (-1330), Marmaton 4453 (-1363), Pawnee 4534 (-1444), Ft. Scott 4568 (-1478), Cherokee 4581 (-1491), Morrow Sh 4748 (-1658), Sst 4834 (-1744), Miss 4851 (-1761) LTD 4954 (-1864).

ROCK TYPES

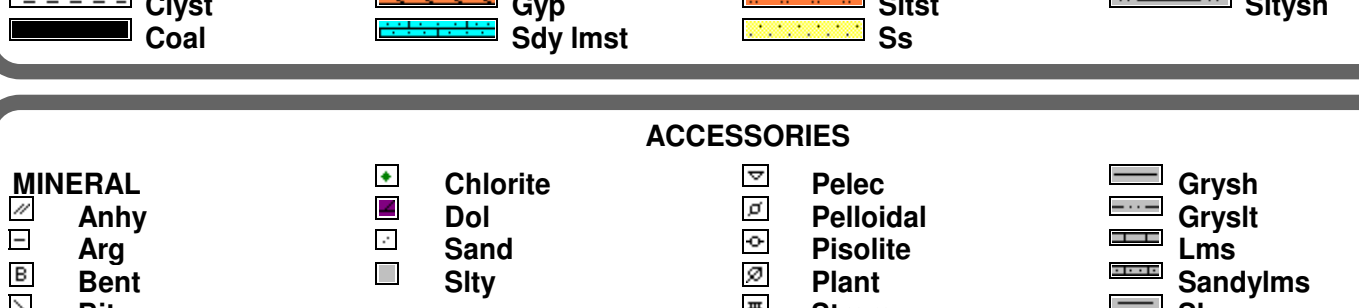

ACCESSORIES

