34-22S-10E

7

CITIES SERVICE OIL COMPANY
Research and Development Department
Tulsa, Oklahoma

KaB.

Company: Cities Service Oil Company

Well: Perry Hanson No. 1 Schroeder

Location: NE NW, Sec. 34-22S-10E, Greenwood County, Kansas

Footage Cored: Rec. approx 2164 to 2181' (17')

Samples: 17 porosity and permeability

Date Received: 3-2-66 Date Reported: 3-8-66

34-22S-10E

Core Description

(not available)

Summary of Data

Est. Represented Footage	Feet	Perm., md.	Por., %	Weighted Averages Saturation, % Oil	Water
2164-2180	16	1.07	14.8		

Prepared by: R. T. Perkins


Reported by: R. T. Perkins

CITIES SERVICE RESEARCH AND DEVELOPMENT COMPANY

Well: Perry Hanson No. 1 Schroeder
Greenwood County, Kansas

Petroleum Production Research Laboratory
Tulsa, Oklahoma

Sandstone | Shale | Dolomite | Limestone

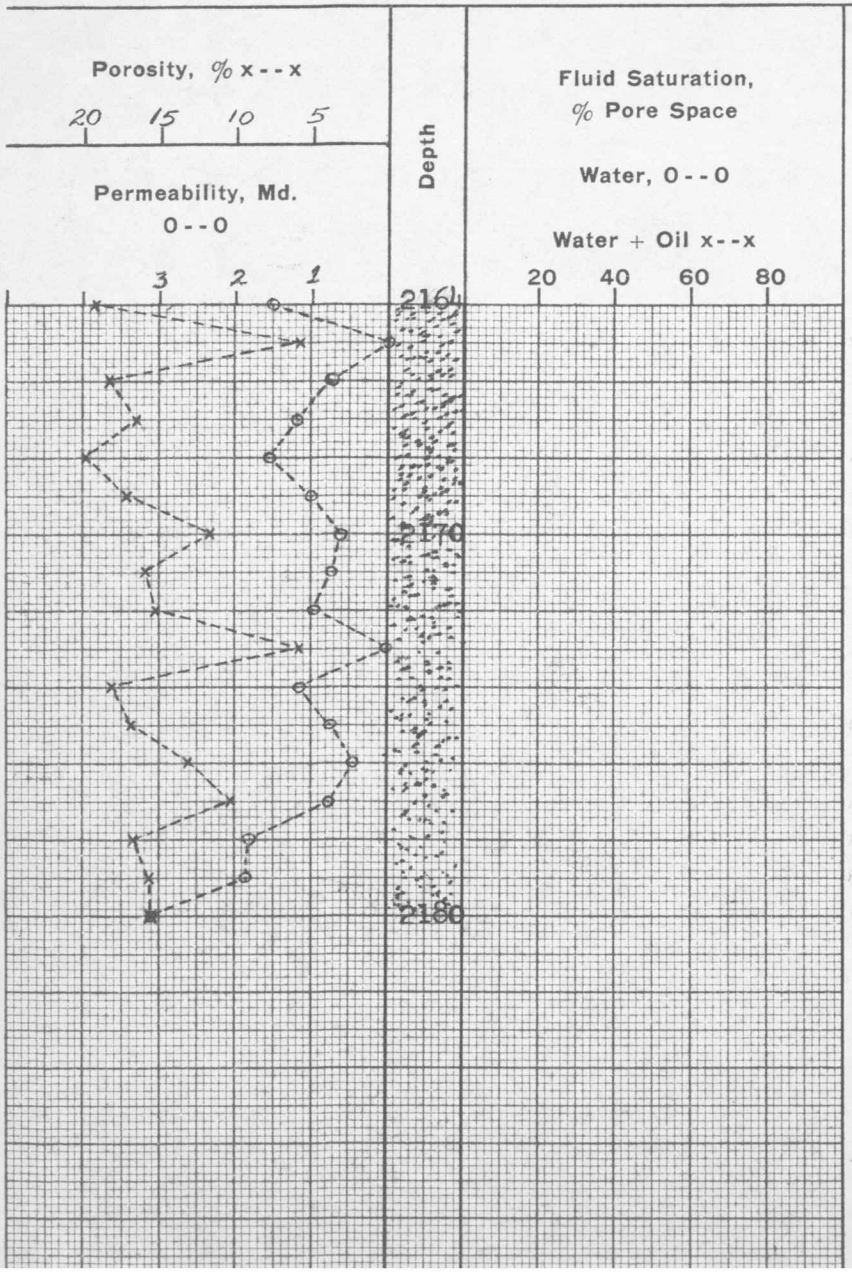

TABULAR DATA

Sample No.	Approx. Depth Ft.	Perm. Md.	Por. %	Saturation % Oil	Saturation % Water	Grain Density
P-1	2164	1.50	19.2			2.77
P-2	65	0	5.6			2.74
P-3	66	0.74	18.3			2.79
P-4	67	1.19	16.5			2.70
P-5	68	1.58	19.9			2.82
P-6	69	1.00	17.1			2.71
P-7	2170	0.62	11.7			2.72
P-8	71	0.71	16.0			2.73
P-9	72	0.97	15.2			2.72
P-10	73	0	5.9			2.74
P-11	74	1.19	18.2			2.84
P-12	75	0.73	16.9			2.75
P-13	76	0.45	13.2			2.75
P-14	77	0.77	10.3			2.75
P-15	78	1.80	16.7			2.69
P-16	79	1.84	15.6			2.69
P-17	2180	3.10	15.5			2.68