

Ricketts Testing, Inc.

15-185-23402

8-21s-13w

Company PALOMINO PETROLEUM, INC. Lease & Well No. DEWEY-DIMOND #1
 Location 1908 K.B Formation _____ Ticket No. 2547
10-27-06 Sec. 8 Twp. 21S Range 13W County STAFFORD State KS
 Approved by _____ Ricketts Representative JIM RICKETTS

Location Test No. 1 Interval Tested from 3338 ft. to 3404 ft. Total Depth 3404 ft.
 Casing Depth 3338 ft. Size 6 3/4 in. Packer Depth _____ ft. Size _____ in.
 Cement Depth 3333 ft. Size 6 3/4 in. Packer Depth _____ ft. Size _____ in.

Recorder Depth (Inside) 3343 ft. Recorder Number W1022 Cap. 10000
 from Recorder Depth (Outside) 3346 ft. Recorder Number 13310 Cap. 4750
 New Straddle Recorder Depth _____ ft. Recorder Number _____ Cap. _____

Drilling Contractor SOUTHWIND DRILLING RIG #2 Drill Collar Length 30 I.D. 2.25 in.
 Type CHEMICAL Viscosity 41 Weight Pipe Length _____ I.D. _____ in.
 Height 9.0 Water Loss 9.6 cc. Drill Pipe Length 3288 I.D. 3.25 in.
 Rides 5300 P.P.M. Test Tool Length 20 ft. Tool Size 5 1/2 in.
 Make _____ Serial Number _____ Anchor Length 66 ft. Size 5 1/2 in.
 Well Flow? NO Reversed Out NO Surface Choke Size 3/4 in. Bottom Choke Size 3/4 in.
 Quantity Oil _____ Main Hole Size 7 7/8 in. Tool Joint Size 4 1/2 XH in.

Remarks: VERY WEAK SURFACE BLOW INITIAL FLOW PERIOD. VERY WEAK SURFACE BLOW FINAL FLOW PERIOD.

Overlaid 30 ft. of MUD WITH A SHOW OF OIL.
 Overlaid _____ ft. of _____
 Overlaid _____ ft. of _____
 Overlaid _____ ft. of _____
 Overlaid _____ ft. of _____
 Remarks: _____

Time Set Packer (s) 8:16 P.M. Time Started Off Bottom 10:16 P.M. Maximum Temperature 96°
 Initial Hydrostatic Pressure (A) 1578 P.S.I.
 Initial Flow Period Minutes 30 (B) 55 P.S.I. to
 (C) 33 P.S.I.
 Initial Closed In Period Minutes 30 (D) 114 P.S.I.
 Initial Flow Period Minutes 30 (E) 51 P.S.I. to
 (F) 36 P.S.I.
 Initial Closed In Period Minutes 30 (G) 78 P.S.I.
 Initial Hydrostatic Pressure (H) 1542 P.S.I.

RECEIVED
 JAN 25 2007
 KCC WICHITA

8-21s-13w

Company Name Palomino Petroleum Inc.
 Well Name Dewe-Diamond #1
 Type of Test DST#1 3338 to 3404'
 Date(s) of Test 10-27-2006



Dewey-Diamond #1 DST#1



RECEIVED
 JAN 25 2007
 KCC WICHITA



Ricketts Testing, Inc.

Company PALOMINO PETROLEUM, INC. Lease & Well No. DEWEY-DIMOND #1
Location 1899 G.L. Formation Ticket No. 2565
10-28-06 Sec. 8 Twp. 21S Range 13W County STAFFORD State KS
Approved by KLEE WATCHOUS Ricketts Representative RICHARD HOLTZ

Interval Test No. 2 Interval Tested from 3459 ft. to 3534 ft. Total Depth 3534 ft.
Packer Depth 3459 ft. Size 6 3/4 in. Packer Depth _____ ft. Size _____ in.
Packer Depth 3454 ft. Size 6 3/4 in. Packer Depth _____ ft. Size _____ in.

Recorder Depth (Inside) 3464 ft. Recorder Number W1119 Cap. 10000
Recorder Depth (Outside) 3467 ft. Recorder Number 13564 Cap. 4475
Straddle Recorder Depth _____ ft. Recorder Number _____ Cap. _____

Drilling Contractor SOUTHWIND DRILLING RIG #2 Drill Collar Length 30 I.D. 2.25 in.
Type CHEMICAL Viscosity 47 Weight Pipe Length _____ I.D. _____ in.
Height 9.1 Water Loss 9.2 cc. Drill Pipe Length 3409 I.D. 3.25 in.
Rides 6100 P.P.M. Test Tool Length 20 ft. Tool Size 5 1/2 in.
Make _____ Serial Number _____ Anchor Length 75 ft. Size 5 1/2 in.
Well Flow? NO Reversed Out NO Surface Choke Size 3/4 in. Bottom Choke Size 3/4 in.
Mud Oil _____ Main Hole Size 7 7/8 in. Tool Joint Size 4 1/2 XH in.

WEAK BLOW BUILDING TO 1 1/2" INITIAL FLOW PERIOD. WEAK BLOW BUILDING TO 6" FINAL FLOW PERIOD.

Overed 40 ft. of OIL CUT MUD. 20% OIL 80% MUD
Overed _____ ft. of _____
Overed _____ ft. of _____
Overed _____ ft. of _____
Overed _____ ft. of _____

Remarks: _____


Set Packer (s) 5:55 P.M. Time Started Off Bottom 7:55 P.M. Maximum Temperature 98°
Initial Hydrostatic Pressure (A) 1659 P.S.I.
Initial Flow Period Minutes 30 (B) 15 P.S.I. to
(C) 24 P.S.I.
Initial Closed In Period Minutes 30 (D) 116 P.S.I.
Initial Flow Period Minutes 30 (E) 20 P.S.I. to
(F) 27 P.S.I.
Initial Closed In Period Minutes 30 (G) 102 P.S.I.
Initial Hydrostatic Pressure (H) 1618 P.S.I.

RECEIVED
JAN 25 2007
KCC WICHITA

Company Name
Well Name
Type of Test
Date(s) of Test

Dewey-Dimond #1 DST #2

RECEIVED
JAN 25 2007
KCC WICHTA

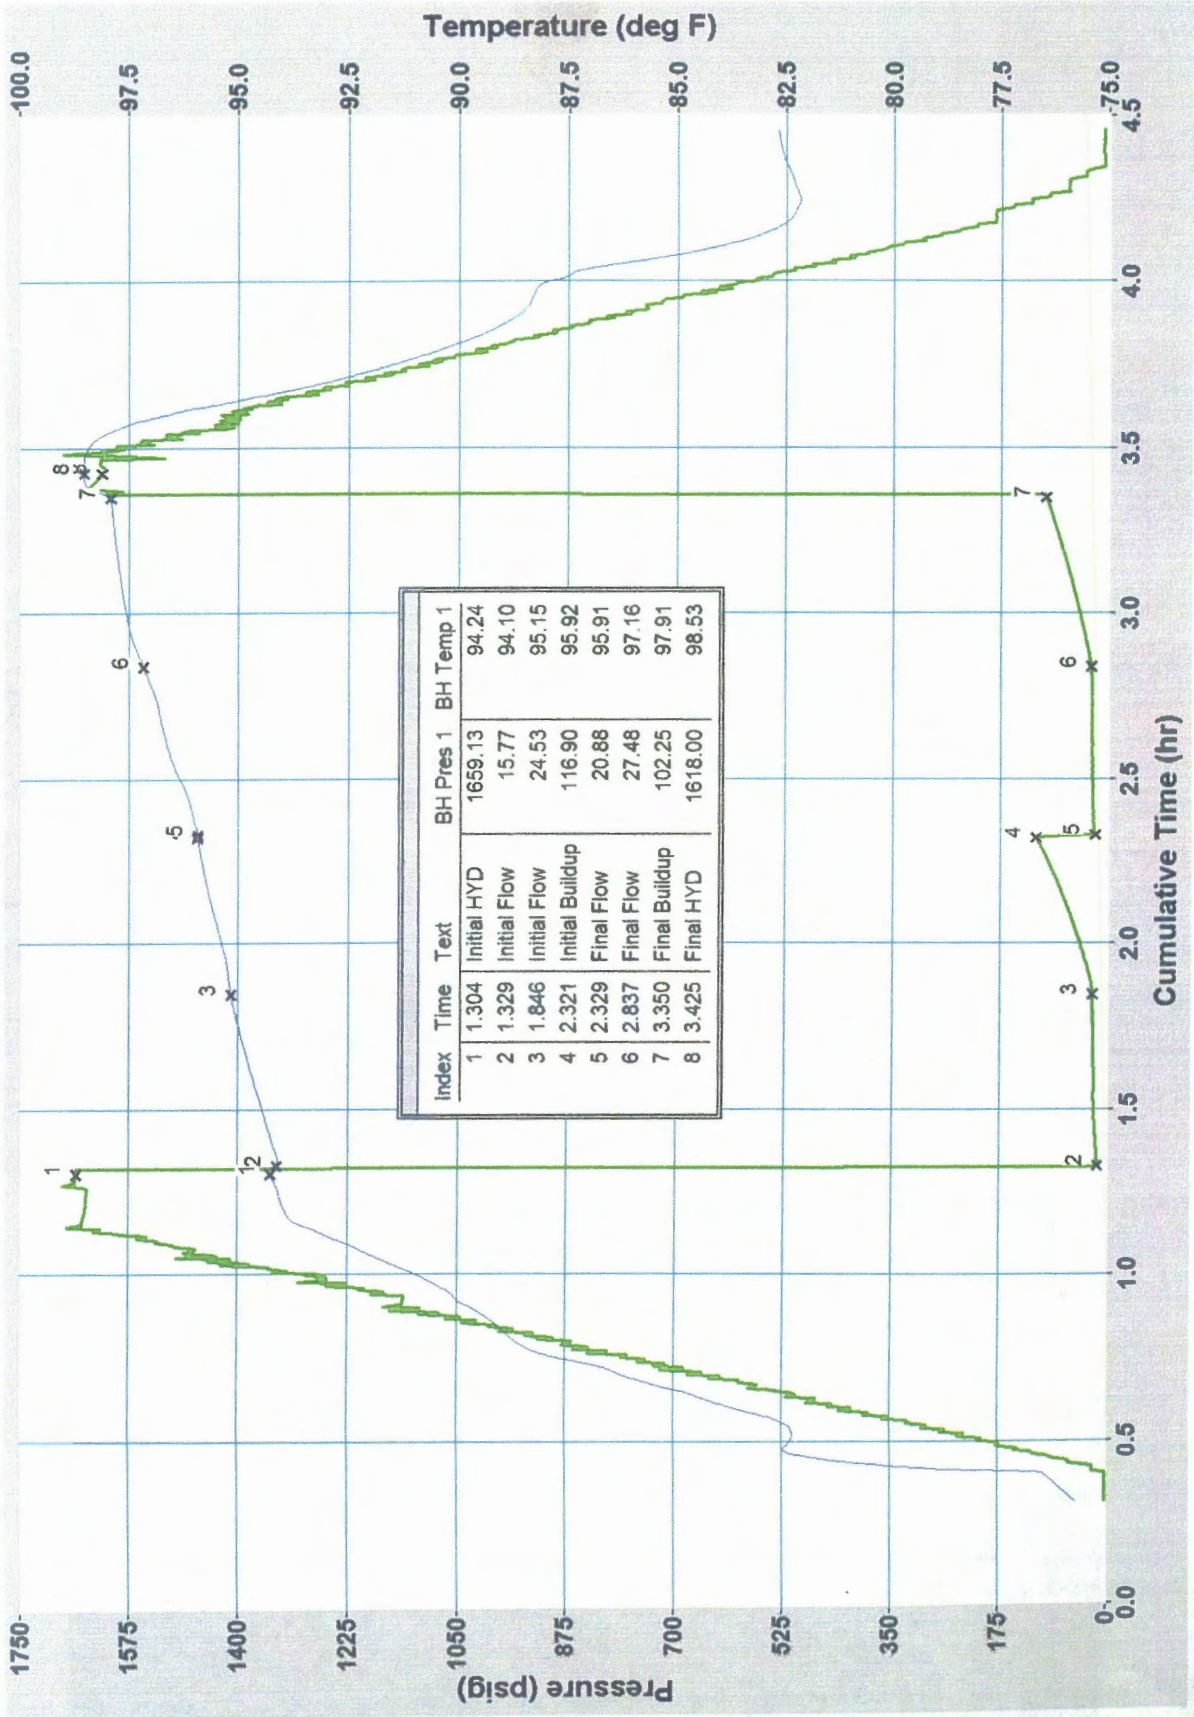



Ricketts Testing, Inc.

PALOMINO PETROLEUM, INC. Lease & Well No. DEWEY-DIMOND #1

1899 G.L. Formation Ticket No. 2566

9-06 Sec. 8 Twp. 21S Range 13W County STAFFORD State KS

ed by KLEE WATCHOUS Ricketts Representative RICHARD HOLTZ

Test No. 3 Interval Tested from 3537 ft. to 3622 ft. Total Depth 3622 ft.

h 3537 ft. Size 6 3/4 in. Packer Depth ft. Size in.

h 3532 ft. Size 6 3/4 in. Packer Depth ft. Size in.

Dr Depth (Inside) 3542 ft. Recorder Number W1119 Cap. 10000

Order Depth (Outside) 3545 ft. Recorder Number 13564 Cap. 4475

Die Recorder Depth ft. Recorder Number Cap.

Tractor SOUTHWIND DRILLING RIG #2 Drill Collar Length 30 I.D. 2.25 in.

CHEMICAL Viscosity 53 Weight Pipe Length I.D. in.

9.2 Water Loss 8.8 cc. Drill Pipe Length 3487 I.D. 3.25 in.

6700 P.P.M. Test Tool Length 20 ft. Tool Size 5 1/2 in.

Serial Number Anchor Length 85 ft. Size 5 1/2 in.

How? NO Reversed Out NO Surface Choke Size 3/4 in. Bottom Choke Size 3/4 in.

Main Hole Size 7 7/8 in. Tool Joint Size 4 1/2 XH in.

K BLOW BUILDING TO 1" INITIAL FLOW PERIOD. NO BLOW BACK INITIAL SHUT-IN. SURFACE BLOW

AL FLOW PERIOD. NO BLOW BACK FINAL SHUT-IN.

30 ft. of MUD

ft. of

ft. of

ft. of

ft. of

Packer (s) 12:35 P.M. Time Started Off Bottom 2:35 P.M. Maximum Temperature 98°

Hydrostatic Pressure (A) 1679 P.S.I.

Flow Period Minutes 30 (B) 15 P.S.I. to (C) 19 P.S.I.

Shut In Period Minutes 30 (D) 462 P.S.I.

Flow Period Minutes 30 (E) 20 P.S.I. to (F) 22 P.S.I.


Shut In Period Minutes 30 (G) 415 P.S.I.

Hydrostatic Pressure (H) 1652 P.S.I.

RECEIVED
JAN 25 2007
KCC WICHITA

Company Name Palomiro Petroleum, Inc.
 Well Name Dewey-Diamond #1
 Type of Test DST #3 3537 to 3622
 Date(s) of Test 10-29-2006

Dewey-Diamond #1 DST #3

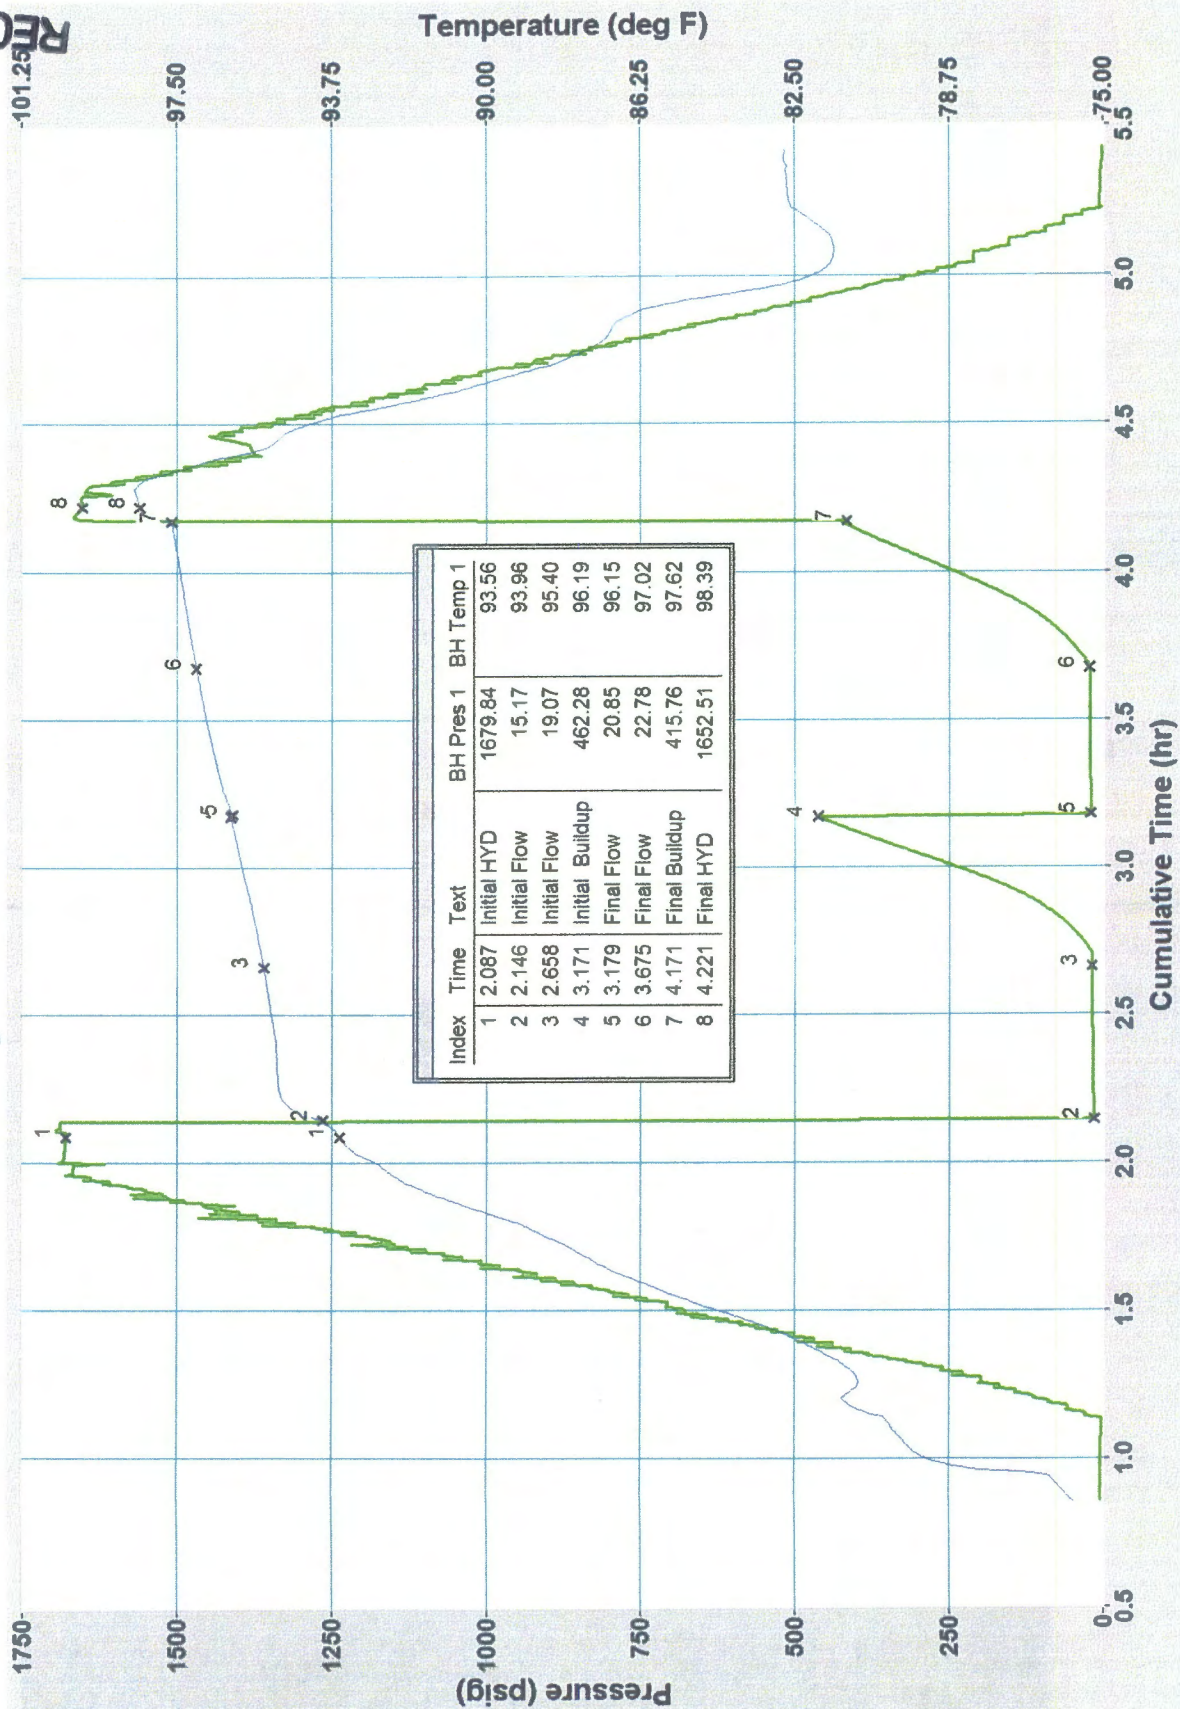



Ricketts Testing, Inc.

Company PALOMINO PETROLEUM, INC. Lease & Well No. DEWEY-DIMOND #1
Location 1899 G.L. Formation _____ Ticket No. 2567
10-30-06 Sec. 8 Twp. 21S Range 13W County STAFFORD State KS
Approved by KLEE WATCHOUS Ricketts Representative RICHARD HOLTZ

Location Test No. 4 Interval Tested from 3629 ft. to 3635 ft. Total Depth 3635 ft.
Packer Depth 3629 ft. Size 6 3/4 in. Packer Depth _____ ft. Size _____ in.
Packer Depth 3624 ft. Size 6 3/4 in. Packer Depth _____ ft. Size _____ in.

Recorder Depth (Inside) 3632 ft. Recorder Number W1119 Cap. 10000
Bottom Recorder Depth (Outside) _____ ft. Recorder Number _____ Cap. _____
New Straddle Recorder Depth _____ ft. Recorder Number _____ Cap. _____

Drilling Contractor SOUTHWIND DRILLING RIG #2 Drill Collar Length 30 I.D. 2.25 in.
Type CHEMICAL Viscosity 49 Weight Pipe Length _____ I.D. _____ in.
Height 9.0 Water Loss 8.8 cc. Drill Pipe Length 3579 I.D. 3.25 in.
Rides 6700 P.P.M. Test Tool Length 20 ft. Tool Size 5 1/2 in.
Make _____ Serial Number _____ Anchor Length 6 ft. Size 5 1/2 in.
Well Flow? NO Reversed Out NO Surface Choke Size 3/4 in. Bottom Choke Size 3/4 in.
Crude Oil _____ Main Hole Size 7 7/8 in. Tool Joint Size 4 1/2 XH in.

WEAK BLOW BUILDING TO 1" INITIAL FLOW PERIOD. NO BLOW BACK INITIAL SHUT-IN. NO BLOW
FINAL FLOW PERIOD.


Spent 3 ft. of MUD.
Spent _____ ft. of _____
Spent _____ ft. of _____
Spent _____ ft. of _____
Spent _____ ft. of _____
Remarks: _____

Set Packer (s) 12:58 A.M. Time Started Off Bottom 2:58 A.M. Maximum Temperature 102°
Initial Hydrostatic Pressure (A) 1728 P.S.I.
Initial Flow Period Minutes 30 (B) 16 P.S.I. to
(C) 20 P.S.I.
Initial Closed In Period Minutes 30 (D) 21 P.S.I.
Flow Period Minutes 30 (E) 16 P.S.I. to
(F) 19 P.S.I.
Closed In Period Minutes 30 (G) 20 P.S.I.
Hydrostatic Pressure (H) 1683 P.S.I.

RECEIVED
JAN 25 2007
KCC WICHITA

Company Name
Well Name
Type of Test
Date(s) of Test

Dewey-Diamond #1 DST #4

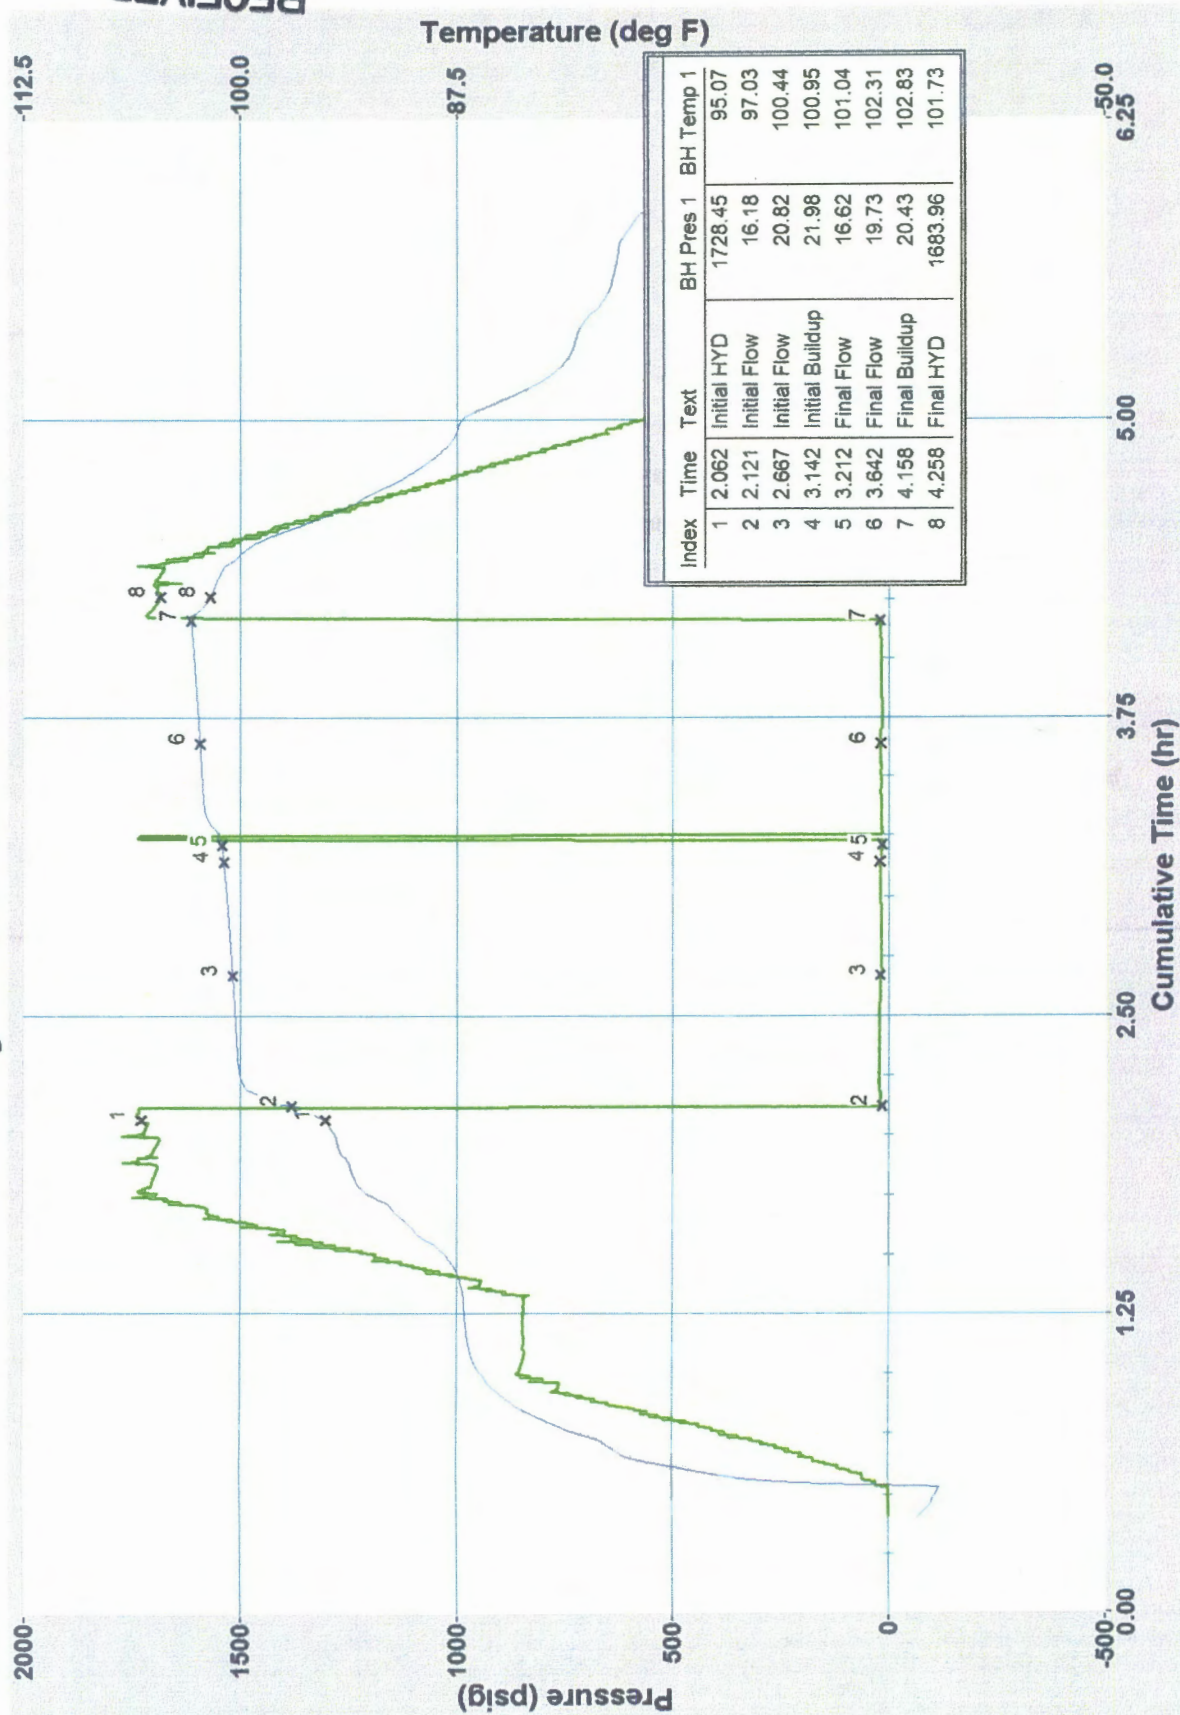

RECEIVED
JAN 25 2007
KCC WICHITA



Ricketts Testing, Inc.

PALOMINO PETROLEUM, INC.

Lease & Well No. DEWEY-DIMOND #1

1899 G.L. Formation ARBUCKLE

Ticket No. 2568

-30-06 Sec. 8 Twp. 21S Range 13W County STAFFORD State KS

Owned by KLEE WATCHOUS

Ricketts Representative RICHARD HOLTZ

Test No. 5 Interval Tested from 3634 ft. to 3645 ft. Total Depth 3645 ft.

Depth 3634 ft. Size 6 3/4 in.

Packer Depth ft. Size in.

Depth 3629 ft. Size 6 3/4 in.

Packer Depth ft. Size in.

Packer Depth (Inside) 3639 ft.

Recorder Number W1119 Cap. 10000

Packer Depth (Outside) 3642 ft.

Recorder Number 13564 Cap. 4475

Packer Depth (Idle Recorder Depth) ft.

Recorder Number Cap.

Drill Rig SOUTHWIND DRILLING RIG #2

Drill Collar Length 30 I.D. 2.25 in.

CHEMICAL Viscosity 54

Weight Pipe Length I.D. in.

9.0 Water Loss 8.8 cc.

Drill Pipe Length 3584 I.D. 3.25 in.

6700 P.P.M.

Test Tool Length 20 ft. Tool Size 5 1/2 in.

Serial Number

Anchor Length 11 ft. Size 5 1/2 in.

Flow? NO Reversed Out NO

Surface Choke Size 3/4 in. Bottom Choke Size 3/4 in.

Main Hole Size 7 7/8 in. Tool Joint Size 4 1/2 XH in.

< BLOW BUILDING TO 5" INITIAL FLOW PERIOD. NO BLOW BACK INITIAL SHUT-IN. NO BLOW FINAL
PERIOD. FLUSHED TOOL, THEN SURFACE BLOW FOR 7 MINUTES.

50 ft. of MUD.

ft. of

ft. of

ft. of

ft. of

Gauge (s) 6:12 P.M. Time Started Off Bottom 8:12 P.M. Maximum Temperature 102°

Static Pressure.....(A) 1711 P.S.I.

PeriodMinutes 30 (B) 35 P.S.I. to
(C) 38 P.S.I.

In PeriodMinutes 30 (D) 1291 P.S.I.

PeriodMinutes 30 (E) 42 P.S.I. to
(F) 43 P.S.I.


In PeriodMinutes 30 (G) 1208 P.S.I.

Static Pressure.....(H) 1683 P.S.I.

RECEIVED
JAN 25 2007
KCC WICHITA

Company Name
Well Name
Type of Test
Date(s) of Test

Dewey-Diamond #1 DST #5

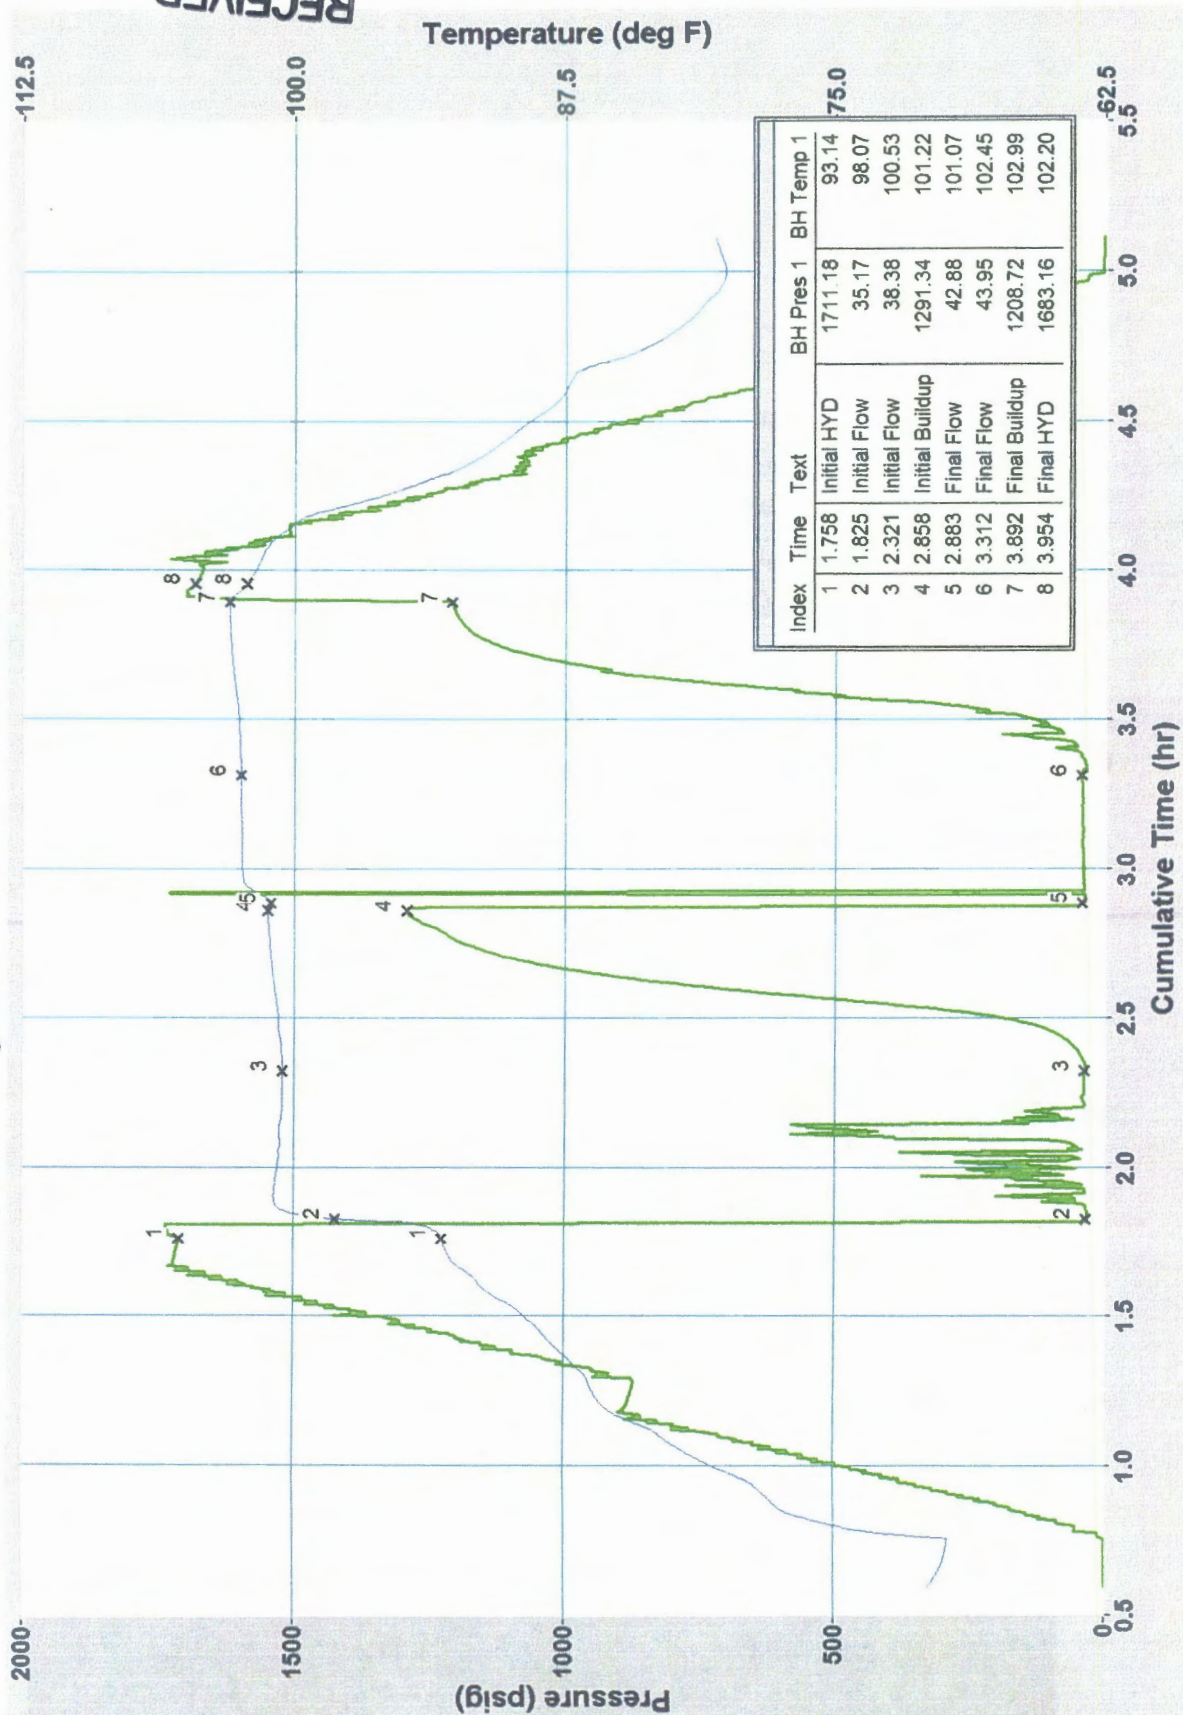

RECEIVED
JAN 25 2007
KCC WICHITA



Ricketts Testing, Inc.

PALOMINO PETROLEUM, INC.

Lease & Well No. DEWEY-DIMOND #1

1899 G.L. Formation ARBUCKLE

Ticket No. 2569

31-06 Sec. 8 Twp. 21S Range 13W County STAFFORD State KS

Drilled by KLEE WATCHOUS

Ricketts Representative RICHARD HOLTZ

Test No. 6 Interval Tested from 3635 ft. to 3650 ft. Total Depth 3650 ft.

Packer Depth 3635 ft. Size 6 3/4 in.

Packer Depth 3630 ft. Size 6 3/4 in.

Packer Depth (Inside) 3640 ft. Recorder Number W1119 Cap. 10000

Packer Depth (Outside) 3643 ft. Recorder Number 13564 Cap. 4475

Packer Depth Recorder Depth Recorder Number Cap.

Tractor SOUTHWIND DRILLING RIG #2

Drill Collar Length 30 I.D. 2.25 in.

CHEMICAL Viscosity 58

Weight Pipe Length I.D. in.

9.1 Water Loss 12.0 cc.

Drill Pipe Length 3585 I.D. 3.25 in.

7300 P.P.M.

Test Tool Length 20 ft. Tool Size 5 1/2 in.

Serial Number

Anchor Length 15 ft. Size 5 1/2 in.

W? NO Reversed Out YES

Surface Choke Size 3/4 in. Bottom Choke Size 3/4 in.

Main Hole Size 7 7/8 in. Tool Joint Size 4 1/2 XH in.

K BLOW BUILDING TO A STRONG BLOW INITIAL FLOW PERIOD. BOTTOM OF BUCKET IN 1 MINUTE. NO
W BACK INITIAL SHUT-IN. WEAK BLOW BUILDING TO A STRONG BLOW IN 4 MINUTES FINAL FLOW
IOD. NO BLOW BACK FINAL SHUT-IN.

2150 ft. of WATER WITH A TRACE OF OIL.

ft. of

ft. of

ft. of

ft. of

DST FLUID CHLORIDES 16,000 PPM

Clock (s) 5:53 PM Time Started Off Bottom 7:53 PM Maximum Temperature 111°

Static Pressure (A) 1751 P.S.I.

Period Minutes 30 (B) 116 P.S.I. to
(C) 609 P.S.I.

Period Minutes 30 (D) 1112 P.S.I.

Period Minutes 30 (E) 642 P.S.I. to
(F) 870 P.S.I.


Period Minutes 30 (G) 1108 P.S.I.

Static Pressure (H) 1689 P.S.I.

RECEIVED
JAN 25 2007
KCC WICHITA

Company Name
Well Name
Type of Test
Date(s) of Test

Dewey-Diamond #1 DST #6

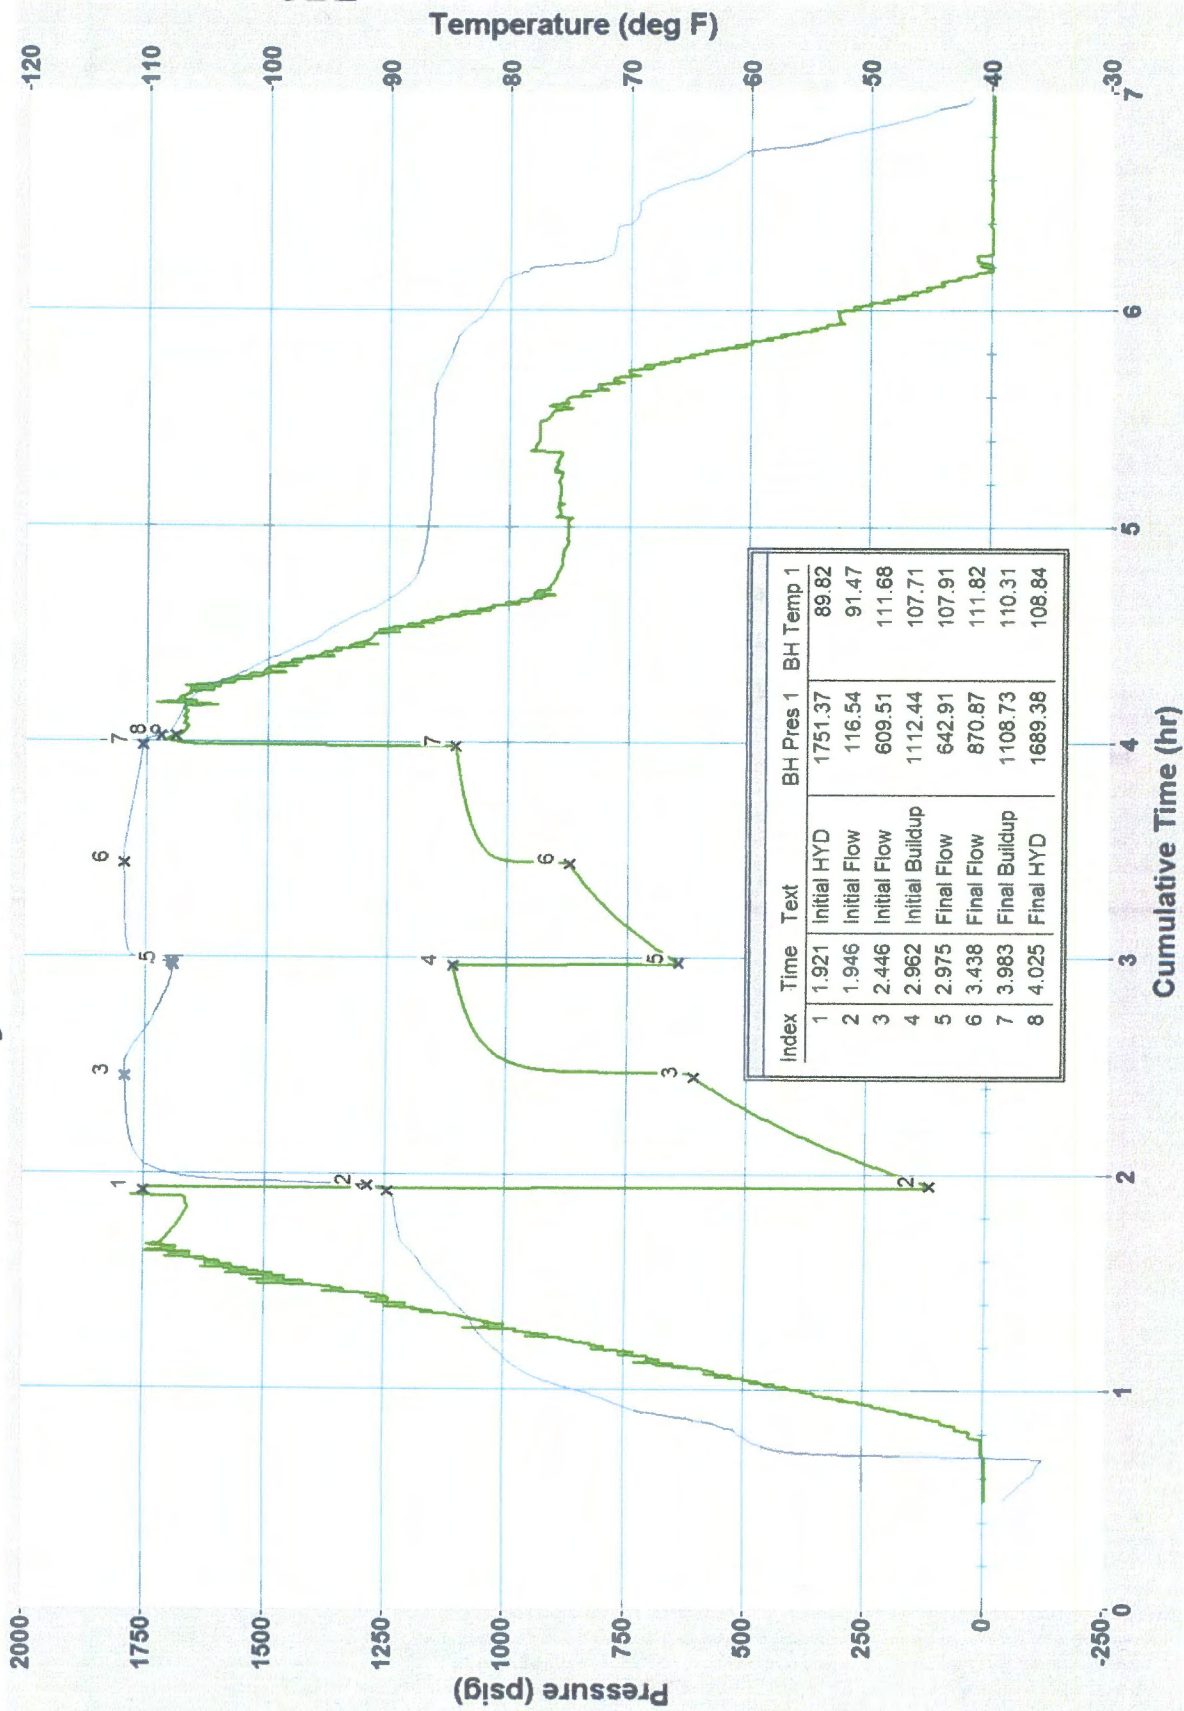

RECEIVED
JAN 25 2007
KCC WICHITA