

15-129-21854

21-33s-39w

IND



Weatherford® Completion Systems

DRILL STEM TEST REPORT

Prepared For: **EOG Resources**

3817 NW Expressway
STE 500
Oklahoma City OK, 73112

ATTN: Dale Passig

21/33/39

KUEA 21-#1

Start Date: 2008.09.24 @ 05:20:46

End Date: 2008.09.24 @ 17:11:16

Job Ticket #: 27248 DST #: 1

RECEIVED
KANSAS CORPORATION COMMISSION

DEC 29 2008

CONSERVATION DIVISION
WICHITA, KS

CONFIDENTIAL

DEC 24 2008

KCC

EOG Resources

KUEA 21-#1

21/33/39

DST # 1

Upper Morrow

2008.09.24

ALPINE OIL SERVICES CORPORATION
2460, 240 - 4 Avenue S.W. Calgary, AB. T2P 4H4
ph: 263-7800 fax: 264-7260



DRILL STEM TEST REPORT

EOG Resources

KUEA 21-#1

3817 NW Expressway
STE 500
Oklahoma City OK, 73112
ATTN: Dale Passig

21/33/39

Job Ticket: 27248

DST#: 1

Test Start: 2008.09.24 @ 05:20:46

GENERAL INFORMATION:

Formation: **Upper Morrow**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 09:39:01

Time Test Ended: 17:11:16

Test Type: Conventional Bottom Hole

Tester: Mike Slemp

Unit No: 28

Interval: **5630.00 ft (KB) To 5780.00 ft (KB) (TVD)**

Reference Elevations: 3247.00 ft (KB)

Total Depth: 5780.00 ft (KB) (TVD)

3235.00 ft (CF)

Hole Diameter: 7.78 inches Hole Condition: Fair

KB to GR/CF: 12.00 ft

Serial #: **6752**

Inside

Press@RunDepth: 48.54 psig @ 5632.00 ft (KB)

Capacity: 7000.00 psig

Start Date: 2008.09.24

End Date:

2008.09.24

Last Calib.: 2008.09.24

Start Time: 05:20:47

End Time:


17:11:16

Time On Btm: 2008.09.24 @ 09:36:46

Time Off Btm: 2008.09.24 @ 14:08:31

TEST COMMENT: IF- Strong building blow , BOB in 25 min
IS- No blow back
FF- Strong building blow , BOB in 18 min
FS- No blow back

Pressure vs. Time

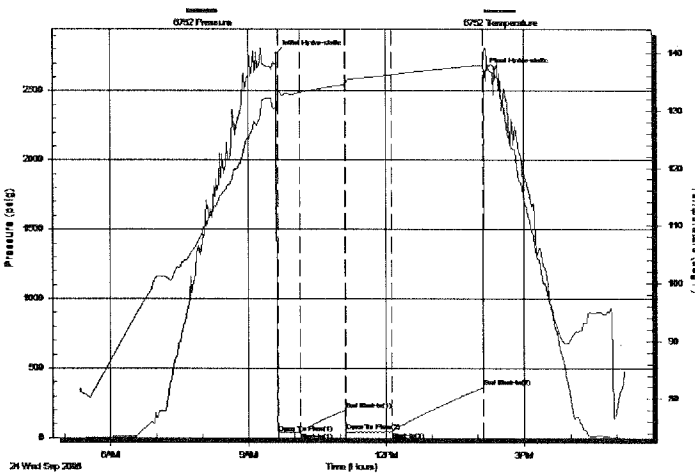

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2769.99	130.46	Initial Hydro-static
3	36.55	133.18	Open To Flow (1)
31	41.01	133.16	Shut-In (1)
91	203.00	134.54	End Shut-In (1)
91	45.61	134.49	Open To Flow (2)
152	48.54	136.25	Shut-In (2)
271	367.31	137.94	End Shut-In (2)
272	2639.08	139.62	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
93.00	100% mud	0.46

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



Weatherford® Completion Systems

DRILL STEM TEST REPORT

EOG Resources

KUEA 21-#1

3817 NW Expressway
STE 500
Oklahoma City OK, 73112
ATTN: Dale Passig

21/33/39

Job Ticket: 27248

DST#: 1

Test Start: 2008.09.24 @ 05:20:46

GENERAL INFORMATION:

Formation: **Upper Morrow**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 09:39:01

Time Test Ended: 17:11:16

Test Type: Conventional Bottom Hole

Tester: Mike Slomp

Unit No: 28

Interval: **5630.00 ft (KB) To 5780.00 ft (KB) (TVD)**

Reference Elevations: 3247.00 ft (KB)

Total Depth: 5780.00 ft (KB) (TVD)

3235.00 ft (CF)

Hole Diameter: 7.78 inches Hole Condition: Fair

KB to GR/CF: 12.00 ft

Serial #: **8321** Inside

Press@RunDepth: psig @ 5632.00 ft (KB)

Capacity: 7000.00 psig

Start Date: 2008.09.24

End Date:

2008.09.24

Last Calib.:

2008.09.24

Start Time: 05:25:54

End Time:


17:13:23

Time On Btm:

Time Off Btm:

TEST COMMENT: IF- Strong building blow , BOB in 25 min
IS- No blow back
FF- Strong building blow , BOB in 18 min
FS- No blow back

Pressure vs. Time

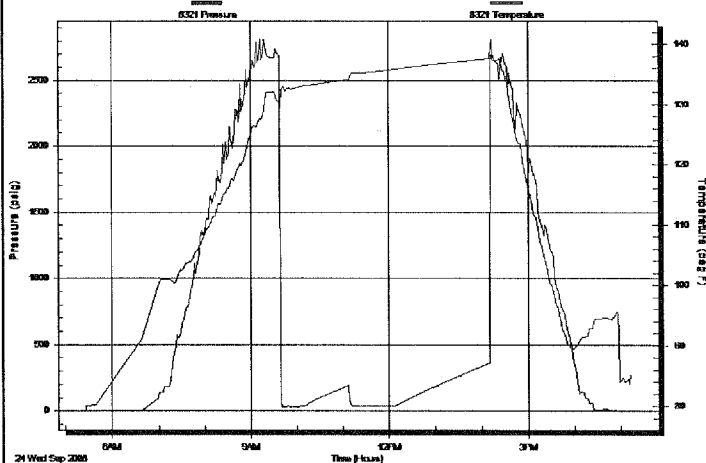

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
-------------	-----------------	--------------	------------

Recovery

Length (ft)	Description	Volume (bbl)
93.00	100% mud	0.46

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



Weatherford®
Completion Systems

DRILL STEM TEST REPORT

TOOL DIAGRAM

EOG Resources

KUEA 21-#1

3817 NW Expressway
STE 500
Oklahoma City OK, 73112
ATTN: Dale Passig

21/33/39

Job Ticket: 27248

DST#: 1

Test Start: 2008.09.24 @ 05:20:46

Tool Information

Drill Pipe:	Length: 5331.00 ft	Diameter: 3.80 inches	Volume: 74.78 bbl	Tool Weight:	2000.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length: 273.00 ft	Diameter: 2.25 inches	Volume: 1.34 bbl	Weight to Pull Loose:	120000.0 lb
		Total Volume:	76.12 bbl	Tool Chased	0.00 ft
Drill Pipe Above KB:	4.00 ft			String Weight: Initial	78000.00 lb
Depth to Top Packer:	5630.00 ft			Final	88000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	150.00 ft				
Tool Length:	180.00 ft				
Number of Packers:	2	Diameter:	6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			5601.00	
Shut In Tool	5.00			5606.00	
Sampler	3.00			5609.00	
Hydraulic tool	5.00			5614.00	
Jars	5.00			5619.00	
Safety Joint	2.00			5621.00	
Packer - Shale	5.00			5626.00	
Packer	4.00			5630.00	30.00 Bottom Of Top Packer
Stubb	1.00			5631.00	
Perforations	1.00			5632.00	
Recorder	0.00	8321	Inside	5632.00	
Recorder	0.00	6752	Inside	5632.00	
Perforations	18.00			5650.00	
Change Over Sub	1.00			5651.00	
Drill Pipe	125.00			5776.00	
Change Over Sub	1.00			5777.00	
Bullnose	3.00			5780.00	150.00 Anchor Tool
Total Tool Length:		180.00			



Weatherford®
Completion Systems

DRILL STEM TEST REPORT

FLUID SUMMARY

EOG Resources

KUEA 21-#1

3817 NW Expressway
STE 500
Oklahoma City OK, 73112
ATTN: Dale Passig

21/33/39

Job Ticket: 27248

DST#: 1

Test Start: 2008.09.24 @ 05:20:46

Mud and Cushion Information

Mud Type: Gel Chem

Mud Weight: 9.00 lb/gal

Viscosity: 45.00 sec/qt

Water Loss: 13.96 cm³

Resistivity: ohm.m

Salinity: 1100.00 ppm

Filter Cake: inches

Cushion Type:

Cushion Length: ft

Cushion Volume: bbl

Gas Cushion Type:

Gas Cushion Pressure: psig

Oil API:

deg API

Water Salinity: ppm

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
93.00	100% mud	0.457

Total Length: 93.00 ft Total Volume: 0.457 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments: Sampler=100% mud



Weatherford®
Completion Systems

DRILL STEM TEST REPORT

GAS RATES

EOG Resources

KUEA 21-#1

3817 NW Expressway
STE 500
Oklahoma City OK, 73112
ATTN: Dale Passig

21/33/39

Job Ticket: 27248

DST#: 1

Test Start: 2008.09.24 @ 05:20:46


Gas Rates Information

Temperature: 59 deg C
Relative Density: 0.65
Z Factor: 0.8


Gas Rates Table

Flow Period	Elapsed Time	Choke (mm)	Pressure (kPaa)	Gas Rate (m³/d)
		0.00	0.00	0.00

Pressure vs. Time

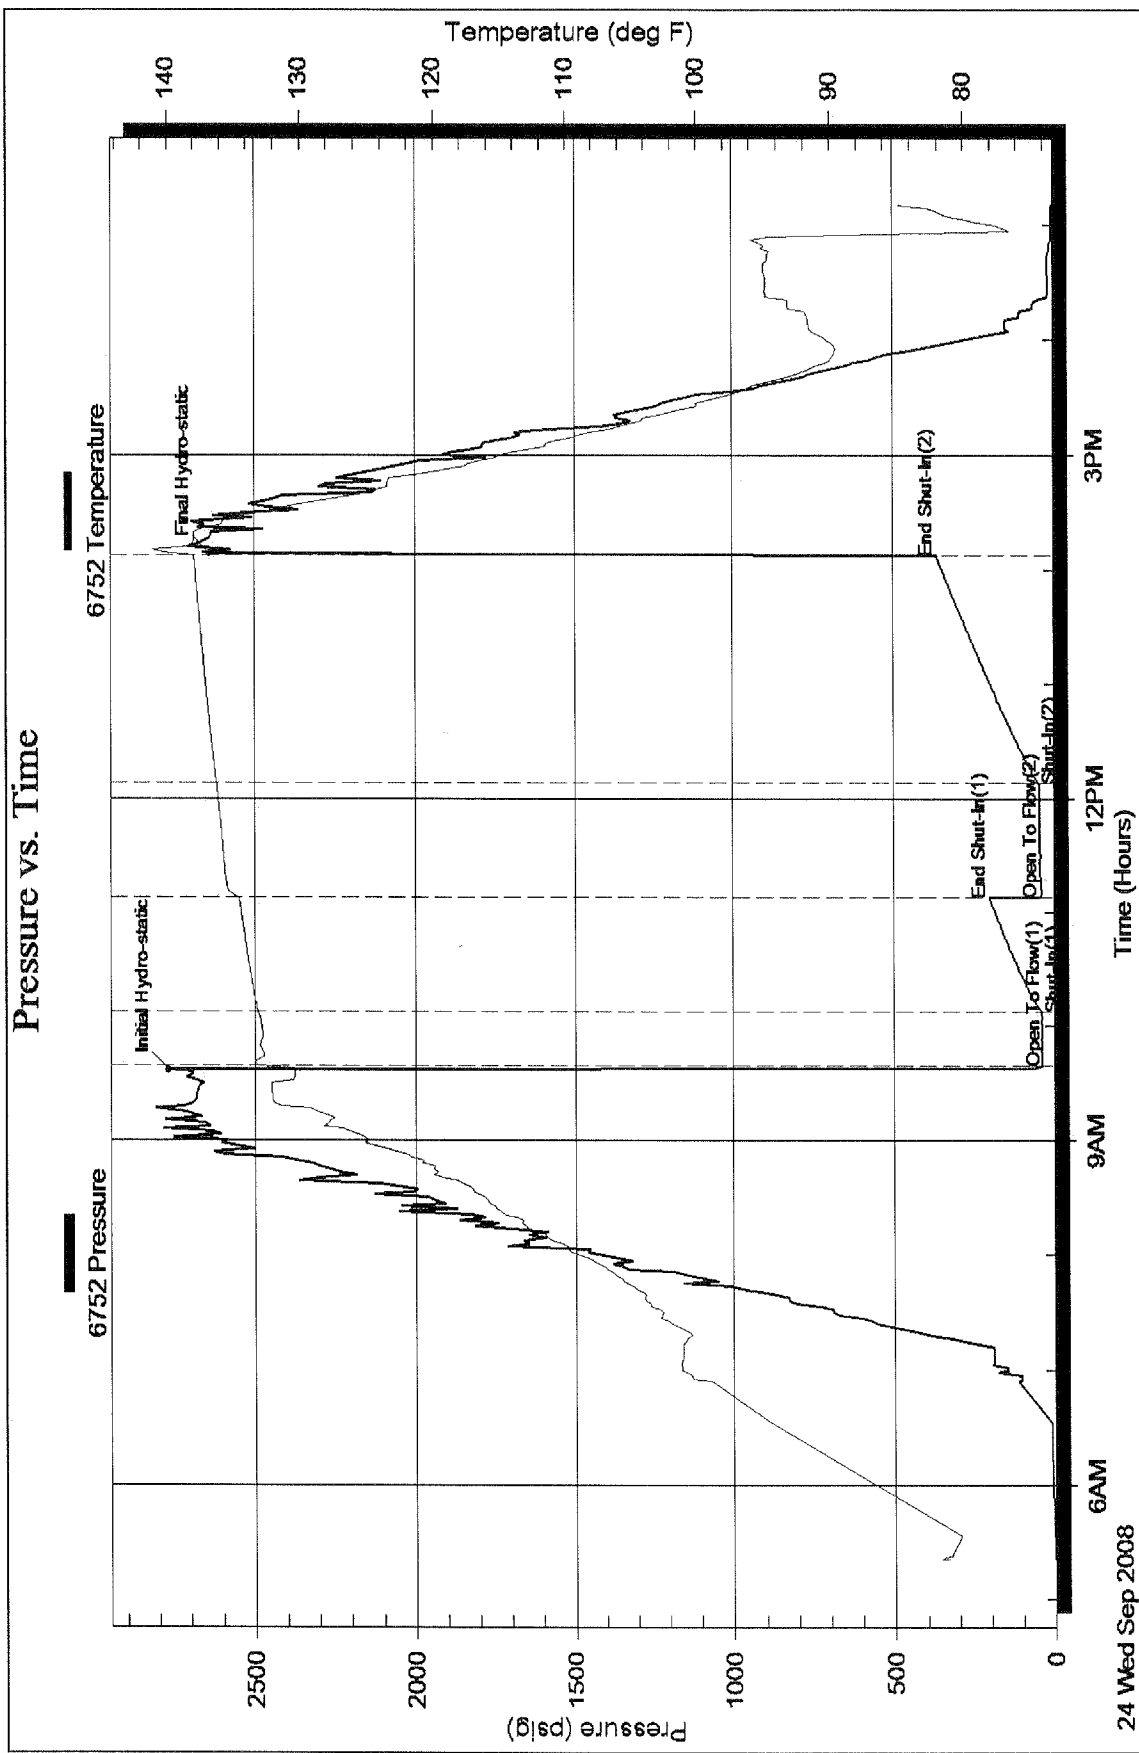

Pressure vs. Time

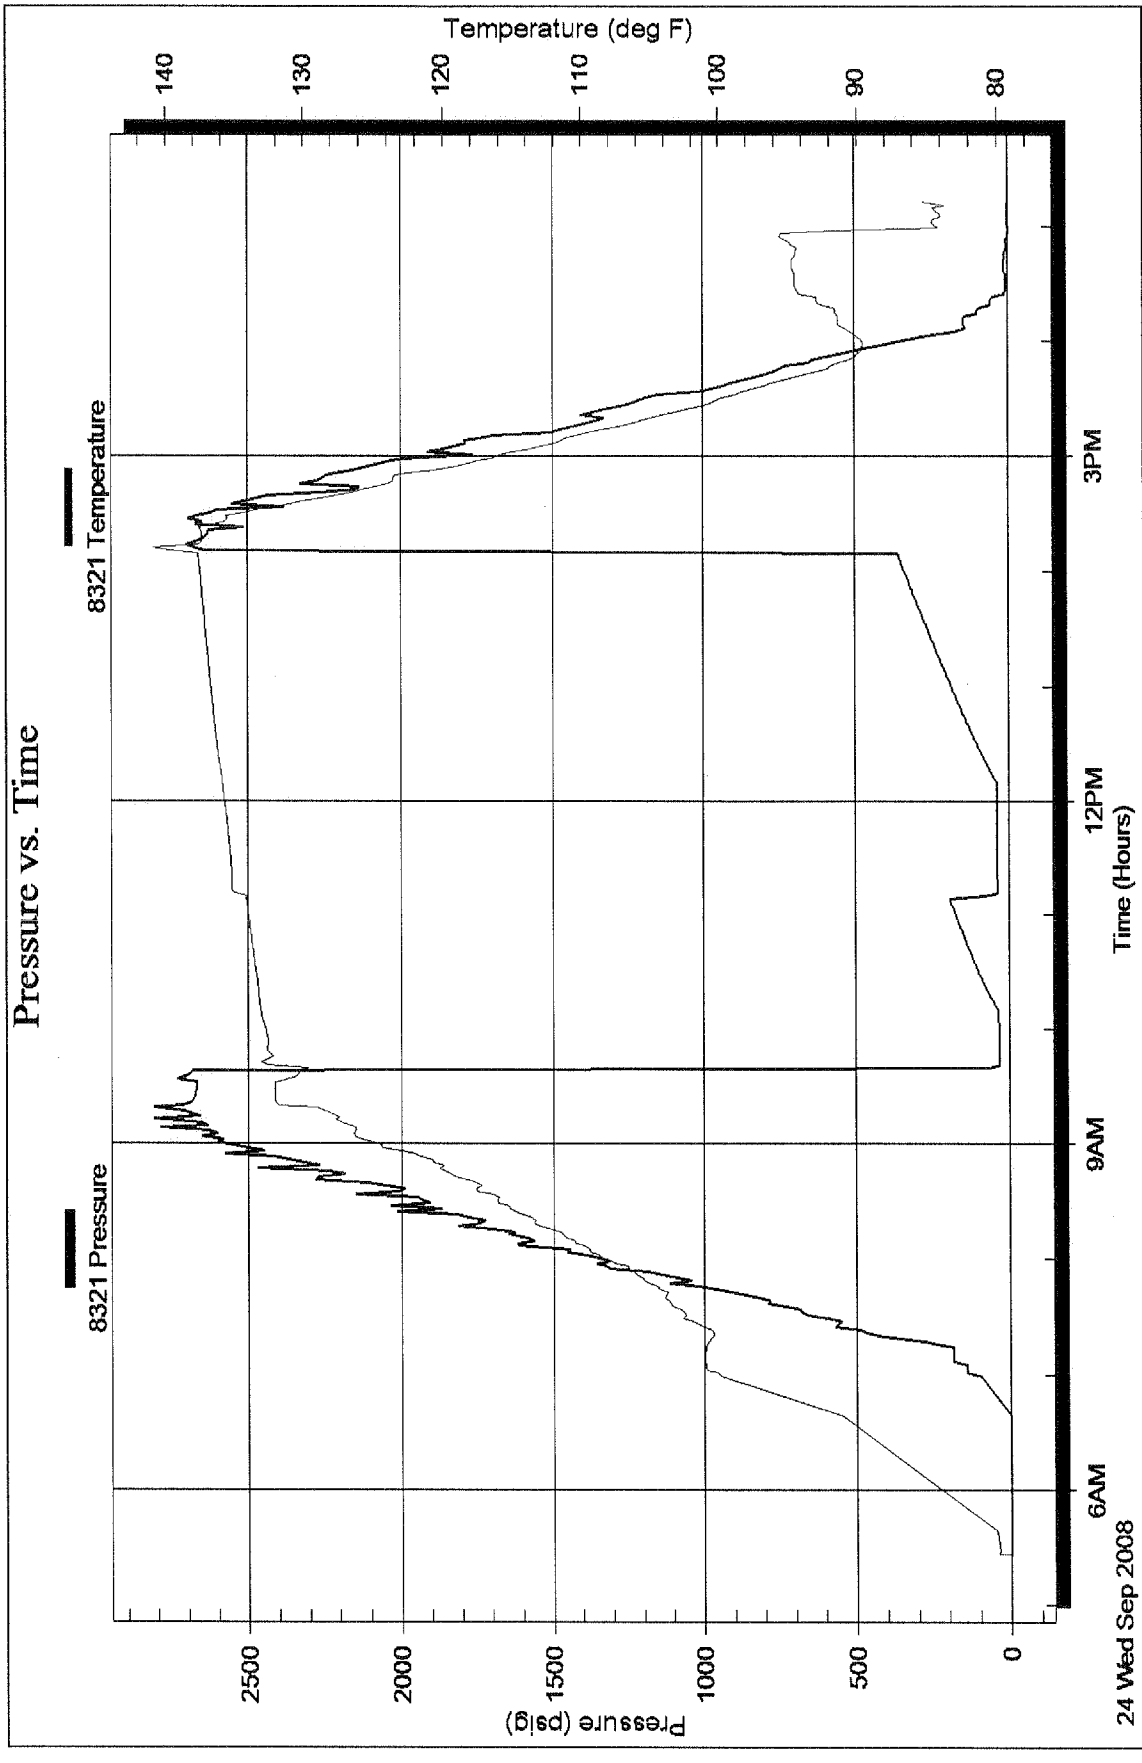

				DRILL STEM TESTING - DATA LISTING			
Weatherford[®] Completion Systems				KUEA 21-#1 21/33/39 Job Ticket: 27248 DST#: 1 Test Start: 2008.09.24 @ 05:20:46			
EOG Resources 3817 NW Expressway STE 500 Oklahoma City OK,73112 ATTN: Dale Passig							
Serial # 6752	Inside			Serial # 6752	Inside		
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	0.0	1.61	81.3		0.6	1.48	81.8
	0.0	1.55	81.3		0.6	1.49	81.8
	0.0	1.58	81.4		0.6	1.48	81.8
	0.1	1.60	81.4		0.6	1.48	81.8
	0.1	1.61	81.4		0.6	1.47	81.8
	0.1	1.59	81.5		0.6	1.48	81.8
	0.1	1.58	81.5		0.6	1.48	81.8
	0.1	1.58	81.6		0.7	1.48	81.8
	0.1	1.57	81.6		0.7	1.48	81.8
	0.2	1.56	81.6		0.7	1.49	81.8
	0.2	1.57	81.7		0.7	1.49	81.8
	0.2	1.56	81.7		0.7	1.49	81.8
	0.2	1.55	81.7		0.8	1.48	81.8
	0.2	1.55	81.7		0.8	1.49	81.7
	0.2	1.54	81.8		0.8	1.48	81.7
	0.3	1.53	81.8		0.8	1.48	81.7
	0.3	1.53	81.8		0.8	1.48	81.7
	0.3	1.53	81.8		0.8	1.48	81.7
	0.3	1.52	81.8		0.8	1.48	81.7
	0.3	1.52	81.8		0.8	1.48	81.7
	0.3	1.52	81.8		0.9	1.49	81.7
	0.3	1.52	81.8		0.9	1.48	81.7
	0.3	1.52	81.8		0.9	1.48	81.7
	0.4	1.51	81.8		0.9	1.48	81.7
	0.4	1.51	81.8		0.9	1.48	81.6
	0.4	1.51	81.8		0.9	1.49	81.6
	0.4	1.50	81.8		0.9	1.48	81.6
	0.4	1.50	81.8		1.0	1.48	81.6
	0.4	1.49	81.8		1.0	1.48	81.6
	0.5	1.48	81.8		1.0	1.49	81.6
	0.5	1.48	81.8		1.0	1.49	81.6
	0.5	1.49	81.8		1.0	1.50	81.6
	0.5	1.49	81.8		1.1	1.50	81.6
	0.5	1.49	81.8		1.1	1.50	81.6

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	1.1	1.51	81.6		1.8	1.60	81.1
	1.1	1.51	81.5		1.8	1.61	81.0
	1.1	1.52	81.5		1.8	1.61	81.1
	1.1	1.52	81.5		1.8	1.62	80.9
	1.2	1.53	81.5		1.9	1.63	81.1
	1.2	1.52	81.5		1.9	1.65	81.1
	1.2	1.53	81.5		1.9	1.66	81.1
	1.2	1.52	81.5		1.9	1.68	81.1
	1.2	1.53	81.5		1.9	1.72	81.1
	1.3	1.53	81.4		1.9	1.78	81.0
	1.3	1.54	81.4		2.0	1.86	80.3
	1.3	1.53	81.4		2.0	1.87	80.1
	1.3	1.54	81.4		2.0	1.91	80.1
	1.3	1.54	81.4		12.0	3.20	80.3
	1.3	1.54	81.4		22.0	3.53	80.8
	1.4	1.54	81.4		32.0	3.61	63.9
	1.4	1.54	81.4		42.0	3.61	58.3
	1.4	1.54	81.3		52.0	3.60	56.0
	1.4	1.54	81.3		62.0	3.60	55.1
	1.4	1.54	81.3		72.0	13.48	94.6
	1.4	1.55	81.3		82.0	17.13	91.7
	1.5	1.55	81.3		92.0	60.64	98.5
	1.5	1.55	81.3		92.2	60.50	98.5
	1.5	1.55	81.3		92.5	60.41	98.5
	1.5	1.56	81.3		92.7	81.31	98.5
	1.5	1.56	81.2		93.0	114.37	99.0
	1.5	1.56	81.2		93.2	105.34	99.7
	1.5	1.56	81.2		93.5	104.48	100.0
	1.6	1.56	81.2		93.7	103.94	100.2
	1.6	1.56	81.2		94.0	103.98	100.2
	1.6	1.56	81.2		94.2	103.12	100.3
	1.6	1.56	81.2		94.5	102.86	100.4
	1.6	1.56	81.2		94.7	102.74	100.4
	1.6	1.56	81.1		95.0	102.69	100.4
	1.7	1.55	81.1		95.2	102.65	100.4
	1.7	1.55	81.1		95.5	102.66	100.5
	1.7	1.54	81.1		95.7	102.60	100.5
	1.7	1.54	81.1		96.0	103.53	100.5
	1.7	1.56	81.1		96.2	103.44	100.5
	1.8	1.57	81.1		96.5	103.23	100.5
	1.8	1.60	81.1		96.7	103.22	100.5

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	97.0	102.99	100.5		107.2	190.38	101.1
	97.2	141.48	100.6		107.5	190.36	101.1
	97.5	178.11	100.8		107.7	190.34	101.1
	97.7	136.70	101.0		108.0	190.33	101.1
	98.0	149.24	101.1		108.2	190.32	101.1
	98.2	148.25	101.1		108.5	190.30	101.1
	98.5	147.65	101.1		108.7	190.30	101.1
	98.7	147.07	101.2		109.0	190.29	101.1
	99.0	146.74	101.2		109.2	190.28	101.1
	99.2	146.44	101.2		109.5	190.27	101.1
	99.5	146.29	101.2		109.7	190.26	101.1
	99.7	146.23	101.2		110.0	190.26	101.1
	100.0	146.20	101.2		110.2	190.25	101.1
	100.2	146.19	101.2		110.5	190.22	101.1
	100.5	146.17	101.2		110.7	190.21	101.1
	100.7	146.19	101.2		111.0	190.19	101.1
	101.0	146.19	101.2		111.2	190.73	101.1
	101.2	147.59	101.2		111.5	192.68	101.1
	101.5	147.21	101.2		111.7	215.41	101.1
	101.7	147.08	101.2		112.0	237.89	101.1
	102.0	195.97	101.2		112.2	262.33	101.1
	102.2	218.61	101.2		112.5	239.99	101.1
	102.5	194.12	101.2		112.7	239.21	101.1
	102.7	193.29	101.2		113.0	238.66	101.1
	103.0	192.62	101.2		113.2	238.76	101.1
	103.2	191.93	101.2		113.5	279.48	101.1
	103.5	191.52	101.2		113.7	337.33	101.0
	103.7	191.25	101.2		114.0	285.53	100.9
	104.0	191.12	101.1		114.2	284.75	100.9
	104.2	191.00	101.1		114.5	284.27	100.9
	104.5	190.87	101.1		114.7	284.43	100.8
	104.7	191.12	101.1		115.0	293.05	100.8
	105.0	190.72	101.1		115.2	347.45	100.8
	105.2	190.65	101.1		115.5	321.07	100.8
	105.5	190.59	101.1		115.7	329.77	100.7
	105.7	190.55	101.1		116.0	328.98	100.6
	106.0	190.52	101.1		116.2	328.81	100.6
	106.2	190.49	101.1		116.5	328.87	100.6
	106.5	190.45	101.1		116.7	400.24	100.6
	106.7	190.43	101.1		117.0	385.35	100.5
	107.0	190.41	101.1		117.2	375.46	100.5

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	117.5	374.73	100.5		127.7	645.46	102.8
	117.7	374.58	100.5		128.0	646.71	102.7
	118.0	367.67	100.5		128.2	645.34	102.6
	118.2	484.40	100.6		128.5	644.58	102.6
	118.5	420.60	100.5		128.7	664.20	102.6
	118.7	420.52	100.6		129.0	693.48	102.6
	119.0	419.67	100.6		129.2	709.20	102.9
	119.2	419.54	100.6		129.5	733.14	103.2
	119.5	458.43	100.6		129.7	694.25	103.0
	119.7	524.19	100.8		130.0	692.61	102.9
	120.0	466.54	101.0		130.2	691.01	102.9
	120.2	465.51	101.1		130.5	690.00	102.9
	120.5	464.98	101.1		130.7	704.33	102.9
	120.7	464.34	101.2		131.0	750.89	102.9
	121.0	444.96	101.2		131.2	789.32	103.3
	121.2	572.24	101.3		131.5	736.99	103.5
	121.5	510.38	101.5		131.7	735.56	103.6
	121.7	510.49	101.7		132.0	734.52	103.6
	122.0	509.76	101.7		132.2	733.59	103.6
	122.2	509.72	101.7		132.5	732.83	103.6
	122.5	549.35	101.8		132.7	732.63	103.7
	122.7	632.94	101.8		133.0	687.25	103.6
	123.0	556.13	102.0		133.2	783.23	103.6
	123.2	555.39	102.1		133.5	806.97	103.6
	123.5	554.76	102.1		133.7	824.47	103.5
	123.7	553.97	102.1		134.0	781.85	103.7
	124.0	553.80	102.2		134.2	780.32	103.8
	124.2	554.82	102.2		134.5	779.40	103.8
	124.5	569.52	102.2		134.7	776.39	103.9
	124.7	586.71	102.2		135.0	828.65	103.9
	125.0	604.93	102.4		135.2	871.03	104.0
	125.2	643.41	102.7		135.5	832.59	104.0
	125.5	602.08	102.8		135.7	826.85	104.0
	125.7	600.59	102.8		136.0	825.04	104.0
	126.0	599.65	102.8		136.2	824.28	104.0
	126.2	599.19	102.8		136.5	826.71	104.0
	126.5	599.35	102.8		136.7	882.11	103.9
	126.7	641.34	102.8		137.0	975.52	104.1
	127.0	647.51	102.7		137.2	907.96	104.1
	127.2	661.07	102.4		137.5	872.11	104.0
	127.5	672.19	102.7		137.7	870.30	104.0

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	138.0	868.77	104.0		148.2	1144.23	106.1
	138.2	870.31	104.0		148.5	1141.19	106.2
	138.5	930.72	104.0		148.7	1138.71	106.2
	138.7	963.79	103.8		149.0	1132.65	106.2
	139.0	930.69	103.7		149.2	1221.49	106.2
	139.2	918.85	103.9		149.5	1247.82	106.3
	139.5	916.18	104.0		149.7	1258.35	106.3
	139.7	914.18	104.0		150.0	1190.38	106.4
	140.0	890.93	104.0		150.2	1186.39	106.5
	140.2	985.20	104.1		150.5	1183.44	106.6
	140.5	1051.66	104.3		150.7	1181.97	106.6
	140.7	959.82	104.5		151.0	1264.11	106.6
	141.0	961.35	104.6		151.2	1291.48	106.7
	141.2	959.29	104.6		151.5	1331.52	106.9
	141.5	957.63	104.7		151.7	1234.38	106.7
	141.7	1033.86	104.7		152.0	1231.78	106.8
	142.0	1050.12	104.7		152.2	1228.89	106.9
	142.2	1104.77	104.5		152.5	1227.00	106.9
	142.5	1008.64	104.9		152.7	1336.80	107.0
	142.7	1006.15	105.1		153.0	1346.13	107.0
	143.0	1004.10	105.2		153.2	1455.90	106.9
	143.2	1002.96	105.3		153.5	1280.01	107.2
	143.5	1067.29	105.3		153.7	1277.30	107.3
	143.7	1092.58	105.3		154.0	1274.86	107.3
	144.0	1157.98	105.4		154.2	1264.24	107.4
	144.2	1053.69	105.5		154.5	1383.02	107.5
	144.5	1050.30	105.5		154.7	1432.75	107.5
	144.7	1047.77	105.6		155.0	1339.56	107.7
	145.0	1046.05	105.6		155.2	1324.95	107.9
	145.2	1045.19	105.6		155.5	1321.40	107.9
	145.5	1045.06	105.6		155.7	1318.64	107.9
	145.7	1130.65	105.6		156.0	1315.64	108.0
	146.0	1212.03	105.6		156.2	1437.64	108.0
	146.2	1096.85	105.6		156.5	1474.50	108.2
	146.5	1094.87	105.7		156.7	1362.56	108.3
	146.7	1092.75	105.7		157.0	1368.91	108.3
	147.0	1091.31	105.7		157.2	1365.95	108.3
	147.2	1062.92	105.7		157.5	1363.43	108.3
	147.5	1169.71	105.8		157.7	1378.18	108.3
	147.7	1194.58	105.8		158.0	1483.03	108.4
	148.0	1240.64	106.0		158.2	1549.22	108.6

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	158.5	1409.57	108.7		168.7	1730.47	111.3
	158.7	1414.49	108.9		169.0	1737.40	111.2
	159.0	1411.62	108.9		169.2	1653.69	111.5
	159.2	1409.37	109.0		169.5	1649.08	111.6
	159.5	1544.09	109.0		169.7	1644.10	111.7
	159.7	1546.69	109.2		170.0	1639.45	111.7
	160.0	1613.45	109.3		170.2	1635.54	111.7
	160.2	1462.02	109.6		170.5	1632.72	111.7
	160.5	1459.36	109.7		170.7	1631.14	111.7
	160.7	1456.35	109.8		171.0	1585.71	111.7
	161.0	1454.12	109.8		171.2	1763.73	111.8
	161.2	1452.68	109.8		171.5	1768.73	111.9
	161.5	1451.64	109.8		171.7	1779.35	111.9
	161.7	1450.77	109.9		172.0	1781.24	112.0
	162.0	1449.91	109.9		172.2	1705.08	112.4
	162.2	1449.68	109.9		172.5	1699.27	112.8
	162.5	1448.99	109.9		172.7	1694.03	113.0
	162.7	1448.87	109.9		173.0	1689.76	113.1
	163.0	1516.81	109.9		173.2	1665.21	113.1
	163.2	1592.37	109.9		173.5	1719.45	113.2
	163.5	1711.49	109.9		173.7	1810.77	113.2
	163.7	1510.26	110.0		174.0	1815.35	113.1
	164.0	1506.59	110.2		174.2	1823.82	113.2
	164.2	1503.00	110.3		174.5	1837.41	113.5
	164.5	1500.51	110.3		174.7	1767.58	113.5
	164.7	1620.75	110.4		175.0	1751.22	113.4
	165.0	1647.07	110.4		175.2	1745.53	113.4
	165.2	1694.08	110.3		175.5	1740.35	113.3
	165.5	1557.85	110.7		175.7	1735.43	113.3
	165.7	1553.14	110.9		176.0	1730.94	113.3
	166.0	1549.23	111.0		176.2	1726.81	113.3
	166.2	1547.75	111.1		176.5	1723.29	113.3
	166.5	1664.28	111.1		176.7	1721.39	113.3
	166.7	1711.49	111.0		177.0	1862.63	113.3
	167.0	1664.71	111.0		177.2	1866.06	113.2
	167.2	1603.80	111.2		177.5	1872.66	113.3
	167.5	1599.03	111.3		177.7	1875.56	113.5
	167.7	1594.63	111.4		178.0	1790.33	113.7
	168.0	1592.19	111.4		178.2	1785.41	113.7
	168.2	1637.28	111.4		178.5	1780.70	113.8
	168.5	1715.63	111.5		178.7	1777.62	113.8

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	179.0	1934.21	113.9		189.2	1960.84	116.2
	179.2	1924.97	114.0		189.5	1957.52	116.2
	179.5	1939.63	114.3		189.7	1954.56	116.2
	179.7	1958.98	114.4		190.0	1951.88	116.3
	180.0	1825.42	114.6		190.2	1992.52	116.3
	180.2	1822.61	114.8		190.5	2127.77	116.4
	180.5	1819.17	114.9		190.7	2280.97	116.6
	180.7	1811.47	114.9		191.0	2033.68	116.6
	181.0	1975.10	115.0		191.2	2025.61	116.8
	181.2	1983.56	114.9		191.5	2020.25	116.9
	181.5	2053.88	115.0		191.7	2015.32	116.9
	181.7	1902.91	115.1		192.0	2010.59	117.0
	182.0	1889.86	115.2		192.2	2006.25	117.0
	182.2	1884.34	115.2		192.5	2002.64	117.0
	182.5	1879.18	115.3		192.7	1999.68	117.1
	182.7	1874.39	115.3		193.0	1997.84	117.1
	183.0	1870.01	115.3		193.2	1995.25	117.1
	183.2	1866.01	115.3		193.5	1993.34	117.1
	183.5	1862.62	115.3		193.7	1992.43	117.1
	183.7	1859.64	115.3		194.0	2161.07	117.1
	184.0	1857.19	115.3		194.2	2272.65	117.2
	184.2	1858.48	115.3		194.5	2056.86	117.1
	184.5	2042.89	115.4		194.7	2055.65	117.2
	184.7	2163.12	115.5		195.0	2052.28	117.3
	185.0	1917.51	115.6		195.2	2049.16	117.3
	185.2	1915.65	115.7		195.5	2046.44	117.3
	185.5	1912.20	115.8		195.7	2226.02	117.3
	185.7	1909.05	115.8		196.0	2270.82	117.5
	186.0	1906.12	115.9		196.2	2116.89	117.7
	186.2	1903.77	115.9		196.5	2106.79	117.8
	186.5	1904.72	115.9		196.7	2102.31	117.9
	186.7	1940.01	115.8		197.0	2098.06	117.9
	187.0	1946.14	115.8		197.2	2094.27	117.9
	187.2	1938.50	115.9		197.5	2091.30	117.9
	187.5	1932.76	115.9		197.7	2244.73	118.0
	187.7	1927.37	115.9		198.0	2364.60	118.2
	188.0	1962.72	115.9		198.2	2136.03	118.4
	188.2	2052.24	115.9		198.5	2144.15	118.8
	188.5	2085.96	116.0		198.7	2141.36	119.0
	188.7	2149.55	116.1		199.0	2138.64	119.1
	189.0	1963.09	116.2		199.2	2138.10	119.2

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	199.5	2300.10	119.3		209.7	2417.51	121.6
	199.7	2323.23	119.3		210.0	2418.48	121.7
	200.0	2362.22	119.0		210.2	2415.96	121.7
	200.2	2191.46	119.5		210.5	2413.15	121.7
	200.5	2189.38	119.8		210.7	2410.79	121.7
	200.7	2186.48	119.9		211.0	2408.82	121.7
	201.0	2183.76	120.0		211.2	2428.45	121.7
	201.2	2181.39	120.1		211.5	2597.48	121.9
	201.5	2158.50	120.1		211.7	2623.76	122.8
	201.7	2347.21	120.2		212.0	2533.78	122.8
	202.0	2418.99	120.2		212.2	2462.98	122.8
	202.2	2227.10	119.8		212.5	2461.63	122.8
	202.5	2236.78	119.7		212.7	2459.34	122.8
	202.7	2234.13	119.6		213.0	2627.75	122.9
	203.0	2231.32	119.6		213.2	2673.81	123.2
	203.2	2284.36	119.6		213.5	2716.66	123.4
	203.5	2420.49	120.0		213.7	2509.98	123.5
	203.7	2442.58	120.2		214.0	2508.58	123.5
	204.0	2265.33	120.0		214.2	2505.97	123.5
	204.2	2280.77	119.9		214.5	2499.07	123.5
	204.5	2278.79	119.9		214.7	2700.52	123.8
	204.7	2276.28	119.9		215.0	2744.52	124.3
	205.0	2273.95	119.9		215.2	2568.13	124.3
	205.2	2272.39	119.9		215.5	2563.34	124.4
	205.5	2298.94	119.9		215.7	2558.75	124.4
	205.7	2460.15	120.1		216.0	2554.22	124.5
	206.0	2495.10	120.6		216.2	2542.82	124.5
	206.2	2317.79	120.7		216.5	2739.81	124.8
	206.5	2326.48	120.8		216.7	2756.17	124.7
	206.7	2324.54	120.8		217.0	2724.77	125.1
	207.0	2322.07	120.8		217.2	2629.12	125.4
	207.2	2278.30	120.8		217.5	2605.59	125.2
	207.5	2491.31	120.7		217.7	2601.17	125.1
	207.7	2537.10	120.6		218.0	2597.02	125.0
	208.0	2450.13	120.6		218.2	2593.47	125.0
	208.2	2374.20	120.8		218.5	2590.73	124.9
	208.5	2372.10	120.8		218.7	2588.62	124.9
	208.7	2369.28	120.8		219.0	2586.87	124.9
	209.0	2575.74	120.9		219.2	2585.42	124.9
	209.2	2548.08	121.2		219.5	2584.34	124.9
	209.5	2588.66	121.7		219.7	2583.31	124.9

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	220.0	2582.62	124.9		230.2	2674.79	127.5
	220.2	2612.25	124.9		230.5	2670.39	127.4
	220.5	2754.72	125.2		230.7	2666.67	127.4
	220.7	2736.87	125.6		231.0	2663.79	127.4
	221.0	2618.88	125.7		231.2	2793.87	127.5
	221.2	2615.45	125.7		231.5	2837.87	127.7
	221.5	2611.66	125.7		231.7	2703.87	127.9
	221.7	2608.28	125.7		232.0	2694.25	128.0
	222.0	2605.40	125.7		232.2	2690.09	128.0
	222.2	2603.17	125.7		232.5	2685.95	128.1
	222.5	2811.42	125.8		232.7	2682.44	128.1
	222.7	2750.09	126.0		233.0	2597.14	128.0
	223.0	2642.91	126.0		233.2	2851.55	128.2
	223.2	2637.61	126.2		233.5	2835.05	128.3
	223.5	2632.91	126.3		233.7	2731.13	128.4
	223.7	2628.23	126.3		234.0	2713.08	128.6
	224.0	2623.78	126.4		234.2	2708.47	128.8
	224.2	2620.55	126.5		234.5	2704.01	128.8
	224.5	2617.97	126.6		234.7	2699.83	128.9
	224.7	2595.14	126.6		235.0	2736.22	129.0
	225.0	2789.45	126.9		235.2	2826.86	129.5
	225.2	2737.30	127.0		235.5	2811.54	129.2
	225.5	2652.70	127.5		235.7	2805.84	129.1
	225.7	2648.13	127.8		236.0	2675.09	129.0
	226.0	2643.54	128.0		236.2	2589.14	129.0
	226.2	2639.47	128.1		236.5	2568.84	129.9
	226.5	2636.13	128.2		236.7	2727.22	130.9
	226.7	2646.56	128.2		237.0	2720.83	131.4
	227.0	2791.54	128.3		237.2	2715.59	131.6
	227.2	2770.78	127.7		237.5	2710.77	131.7
	227.5	2664.17	127.6		237.7	2705.95	131.8
	227.7	2659.91	127.8		238.0	2701.63	131.8
	228.0	2655.84	127.9		238.2	2697.79	131.9
	228.2	2652.14	128.0		238.5	2694.94	131.9
	228.5	2649.25	128.0		238.7	2692.59	131.9
	228.7	2646.86	128.1		239.0	2690.71	132.0
	229.0	2652.28	128.0		239.2	2689.27	132.0
	229.2	2820.51	127.9		239.5	2688.26	132.0
	229.5	2784.00	127.7		239.7	2687.34	132.0
	229.7	2684.18	127.5		240.0	2686.61	132.0
	230.0	2679.30	127.5		240.2	2685.98	132.1

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	240.5	2685.47	132.1		250.7	2740.19	130.5
	240.7	2684.93	132.1		251.0	2734.75	130.5
	241.0	2684.41	132.1		251.2	2729.77	130.4
	241.2	2683.89	132.1		251.5	2724.78	130.4
	241.5	2683.14	132.1		251.7	2719.68	130.4
	241.7	2682.71	132.1		252.0	2715.01	130.4
	242.0	2682.52	132.1		252.2	2710.16	130.4
	242.2	2681.79	132.1		252.5	2706.16	130.4
	242.5	2681.68	132.1		252.7	2703.09	130.4
	242.7	2680.89	132.1		253.0	2700.55	130.4
	243.0	2680.66	132.1		253.2	2698.53	130.4
	243.2	2680.21	132.1		253.5	2696.83	130.4
	243.5	2679.82	132.1		253.7	2695.49	130.4
	243.7	2679.48	132.1		254.0	2694.35	130.4
	244.0	2679.21	132.1		254.2	2693.46	130.4
	244.2	2678.73	132.1		254.5	2692.73	130.4
	244.5	2678.49	132.1		254.7	2692.15	130.4
	244.7	2678.11	132.1		255.0	2691.60	130.4
	245.0	2677.69	132.1		255.2	2702.97	130.4
	245.2	2677.43	132.1		255.5	2751.07	130.4
	245.5	2677.12	132.1		255.7	2756.37	130.4
	245.7	2676.96	132.1	Initial Hydro-static	256.0	2769.99	130.5
	246.0	2676.63	132.1		256.2	75.84	129.9
	246.2	2676.25	132.1		256.5	63.53	130.0
	246.5	2676.24	132.1		256.7	61.86	130.1
	246.7	2676.04	132.1		257.0	63.93	130.2
	247.0	2675.79	132.1		257.2	65.51	130.6
	247.2	2675.58	132.1		257.5	46.34	132.0
	247.5	2675.12	132.1		257.7	39.00	132.6
	247.7	2675.07	132.1		258.0	38.23	133.0
	248.0	2675.00	132.1	Open To Flow (1)	258.2	36.55	133.2
	248.2	2674.92	132.1		258.5	37.86	133.1
	248.5	2674.89	132.2		258.7	37.25	133.1
	248.7	2674.81	132.1		259.0	38.07	133.3
	249.0	2659.35	132.2		259.2	37.10	133.3
	249.2	2823.89	132.2		259.5	37.72	133.4
	249.5	2846.98	132.3		259.7	37.70	133.4
	249.7	2840.12	132.2		260.0	40.06	133.4
	250.0	2807.37	131.3		260.2	37.74	133.4
	250.2	2749.53	130.8		260.5	39.27	133.4
	250.5	2683.60	130.6		260.7	37.66	133.3

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	261.0	38.21	133.2		271.2	37.40	132.9
	261.2	36.92	133.1		271.5	39.13	132.9
	261.5	37.71	133.0		271.7	40.04	132.9
	261.7	39.33	133.0		272.0	37.94	132.9
	262.0	38.02	132.9		272.2	38.10	132.9
	262.2	37.97	132.8		272.5	36.65	132.8
	262.5	39.73	132.7		272.7	38.45	132.8
	262.7	38.20	132.6		273.0	39.66	132.8
	263.0	38.13	132.6		273.2	37.92	132.8
	263.2	38.90	132.7		273.5	39.56	132.8
	263.5	39.06	132.7		273.7	38.16	132.8
	263.7	40.17	132.7		274.0	37.98	132.8
	264.0	38.36	132.7		274.2	39.58	132.8
	264.2	38.21	132.7		274.5	36.56	132.8
	264.5	37.41	132.7		274.7	38.32	132.8
	264.7	39.23	132.8		275.0	39.77	132.8
	265.0	40.94	132.8		275.2	37.12	132.8
	265.2	38.64	132.8		275.5	37.73	132.8
	265.5	40.63	132.8		275.7	37.28	132.8
	265.7	37.39	132.8		276.0	37.35	132.8
	266.0	38.10	132.8		276.2	38.99	132.8
	266.2	37.54	132.9		276.5	39.76	132.8
	266.5	38.58	132.9		276.7	38.26	132.8
	266.7	38.72	132.9		277.0	39.75	132.8
	267.0	40.28	132.9		277.2	36.93	132.8
	267.2	38.65	132.9		277.5	38.48	132.8
	267.5	40.48	133.0		277.7	39.80	132.8
	267.7	37.79	133.0		278.0	37.06	132.9
	268.0	37.68	133.0		278.2	38.71	132.9
	268.2	39.52	133.0		278.5	38.04	132.9
	268.5	37.80	133.0		278.7	37.81	132.9
	268.7	39.65	133.0		279.0	37.69	132.9
	269.0	41.20	133.0		279.2	36.41	132.9
	269.2	38.16	133.0		279.5	37.87	132.9
	269.5	38.39	133.0		279.7	39.40	132.9
	269.7	37.25	132.9		280.0	38.28	132.9
	270.0	38.09	132.9		280.2	39.59	132.9
	270.2	39.67	132.9		280.5	39.38	132.9
	270.5	37.83	132.9		280.7	39.33	132.9
	270.7	39.18	132.9		281.0	40.89	132.9
	271.0	40.62	132.9		281.2	38.78	132.9

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	281.5	40.28	133.0		291.7	61.28	133.3
	281.7	38.29	133.0		292.0	62.17	133.3
	282.0	40.26	133.0		292.2	63.17	133.3
	282.2	37.83	133.0		292.5	64.28	133.4
	282.5	39.75	133.0		292.7	64.98	133.4
	282.7	41.19	133.0		293.0	65.90	133.4
	283.0	38.93	133.0		293.2	66.55	133.4
	283.2	40.74	133.0		293.5	67.30	133.4
	283.5	38.43	133.0		293.7	68.01	133.4
	283.7	40.37	133.0		294.0	68.88	133.4
	284.0	41.59	133.1		294.2	69.73	133.4
	284.2	39.43	133.1		294.5	70.45	133.4
	284.5	39.52	133.1		294.7	71.32	133.4
	284.7	38.61	133.1		295.0	72.07	133.4
	285.0	39.67	133.1		295.2	72.94	133.4
	285.2	41.44	133.1		295.5	73.63	133.4
	285.5	38.72	133.1		295.7	74.54	133.4
	285.7	40.77	133.1		296.0	75.24	133.4
	286.0	42.13	133.1		296.2	76.06	133.5
	286.2	39.04	133.2		296.5	76.72	133.5
Shut-In(1)	286.5	41.01	133.2		296.7	77.61	133.5
	286.7	41.94	133.2		297.0	78.33	133.5
	287.0	43.14	133.2		297.2	79.12	133.5
	287.2	44.18	133.2		297.5	79.82	133.5
	287.5	45.44	133.2		297.7	80.60	133.5
	287.7	46.33	133.2		298.0	81.44	133.5
	288.0	47.23	133.2		298.2	82.12	133.5
	288.2	48.40	133.2		298.5	82.87	133.5
	288.5	49.45	133.2		298.7	83.55	133.5
	288.7	50.65	133.2		299.0	84.35	133.5
	289.0	51.31	133.3		299.2	85.01	133.5
	289.2	52.18	133.3		299.5	85.70	133.5
	289.5	53.22	133.3		299.7	86.54	133.5
	289.7	54.14	133.3		300.0	87.28	133.5
	290.0	55.04	133.3		300.2	87.92	133.6
	290.2	55.89	133.3		300.5	88.72	133.6
	290.5	56.91	133.3		300.7	89.47	133.6
	290.7	57.77	133.3		301.0	90.17	133.6
	291.0	58.58	133.3		301.2	90.88	133.6
	291.2	59.59	133.3		301.5	91.60	133.6
	291.5	60.42	133.3		301.7	92.18	133.6

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	302.0	92.90	133.6		312.2	120.33	133.8
	302.2	93.57	133.6		312.5	121.09	133.8
	302.5	94.41	133.6		312.7	121.60	133.8
	302.7	95.02	133.6		313.0	122.28	133.9
	303.0	95.68	133.6		313.2	122.84	133.9
	303.2	96.56	133.6		313.5	123.79	133.9
	303.5	97.20	133.6		313.7	124.02	133.9
	303.7	97.83	133.6		314.0	124.69	133.9
	304.0	98.48	133.6		314.2	125.43	133.9
	304.2	99.27	133.7		314.5	126.05	133.9
	304.5	99.89	133.7		314.7	126.59	133.9
	304.7	100.57	133.7		315.0	127.35	133.9
	305.0	101.30	133.7		315.2	127.90	133.9
	305.2	101.90	133.7		315.5	128.44	133.9
	305.5	102.66	133.7		315.7	129.23	133.9
	305.7	103.29	133.7		316.0	129.78	133.9
	306.0	104.04	133.7		316.2	130.50	133.9
	306.2	104.62	133.7		316.5	131.03	133.9
	306.5	105.28	133.7		316.7	131.59	133.9
	306.7	106.06	133.7		317.0	132.16	133.9
	307.0	106.56	133.7		317.2	132.79	133.9
	307.2	107.32	133.7		317.5	133.47	133.9
	307.5	108.09	133.7		317.7	134.19	134.0
	307.7	108.63	133.7		318.0	134.79	134.0
	308.0	109.20	133.7		318.2	135.34	134.0
	308.2	109.92	133.7		318.5	136.36	134.0
	308.5	110.58	133.7		318.7	136.58	134.0
	308.7	111.29	133.8		319.0	137.23	134.0
	309.0	112.01	133.8		319.2	137.90	134.0
	309.2	112.51	133.8		319.5	138.48	134.0
	309.5	113.25	133.8		319.7	139.13	134.0
	309.7	113.82	133.8		320.0	139.70	134.0
	310.0	114.45	133.8		320.2	140.30	134.0
	310.2	115.21	133.8		320.5	140.96	134.0
	310.5	115.87	133.8		320.7	141.57	134.0
	310.7	116.50	133.8		321.0	142.14	134.0
	311.0	117.05	133.8		321.2	142.78	134.0
	311.2	117.78	133.8		321.5	143.37	134.0
	311.5	118.43	133.8		321.7	143.99	134.0
	311.7	119.03	133.8		322.0	144.50	134.0
	312.0	119.60	133.8		322.2	145.28	134.0

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	322.5	145.81	134.1		332.7	170.60	134.3
	322.7	146.43	134.1		333.0	171.19	134.3
	323.0	147.11	134.1		333.2	171.82	134.3
	323.2	147.68	134.1		333.5	172.39	134.3
	323.5	148.25	134.1		333.7	172.93	134.3
	323.7	148.87	134.1		334.0	173.54	134.3
	324.0	149.43	134.1		334.2	174.50	134.3
	324.2	150.05	134.1		334.5	174.73	134.3
	324.5	150.72	134.1		334.7	175.40	134.3
	324.7	151.35	134.1		335.0	175.94	134.3
	325.0	151.88	134.1		335.2	176.60	134.3
	325.2	152.52	134.1		335.5	177.16	134.3
	325.5	153.15	134.1		335.7	177.79	134.3
	325.7	153.78	134.1		336.0	178.39	134.3
	326.0	154.63	134.1		336.2	179.04	134.3
	326.2	154.86	134.1		336.5	179.57	134.3
	326.5	155.54	134.1		336.7	180.19	134.3
	326.7	156.16	134.1		337.0	180.83	134.4
	327.0	156.74	134.1		337.2	181.42	134.4
	327.2	157.45	134.2		337.5	182.03	134.4
	327.5	158.26	134.2		337.7	182.63	134.4
	327.7	158.50	134.2		338.0	183.23	134.4
	328.0	159.22	134.2		338.2	183.73	134.4
	328.2	159.80	134.2		338.5	184.27	134.4
	328.5	160.40	134.2		338.7	184.90	134.4
	328.7	161.28	134.2		339.0	185.54	134.4
	329.0	161.48	134.2		339.2	186.44	134.4
	329.2	162.20	134.2		339.5	186.68	134.4
	329.5	162.78	134.2		339.7	187.46	134.4
	329.7	163.36	134.2		340.0	188.03	134.4
	330.0	163.97	134.2		340.2	188.60	134.4
	330.2	164.52	134.2		340.5	189.21	134.4
	330.5	165.14	134.2		340.7	190.12	134.4
	330.7	165.76	134.2		341.0	190.36	134.4
	331.0	166.33	134.2		341.2	190.96	134.4
	331.2	167.33	134.2		341.5	191.54	134.4
	331.5	167.57	134.2		341.7	192.26	134.4
	331.7	168.46	134.2		342.0	192.84	134.5
	332.0	168.69	134.2		342.2	193.49	134.5
	332.2	169.40	134.3		342.5	194.00	134.5
	332.5	169.96	134.3		342.7	194.51	134.5

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	343.0	195.12	134.5		353.2	40.19	135.5
	343.2	195.74	134.5		353.5	41.73	135.5
	343.5	196.41	134.5		353.7	42.90	135.5
	343.7	197.06	134.5		354.0	40.43	135.5
	344.0	197.59	134.5		354.2	42.04	135.5
	344.2	198.24	134.5		354.5	43.47	135.5
	344.5	198.82	134.5		354.7	40.69	135.5
	344.7	199.50	134.5		355.0	42.47	135.5
	345.0	200.16	134.5		355.2	43.56	135.5
	345.2	200.70	134.5		355.5	41.13	135.6
	345.5	201.22	134.5		355.7	42.92	135.6
	345.7	201.85	134.5		356.0	44.12	135.6
	346.0	202.41	134.5		356.2	41.24	135.6
End Shut-In(1)	346.2	203.00	134.5		356.5	41.87	135.6
Open To Flow (2)	346.5	45.61	134.5		356.7	42.66	135.6
	346.7	39.40	134.7		357.0	41.31	135.6
	347.0	38.94	134.8		357.2	42.48	135.6
	347.2	38.71	134.8		357.5	44.01	135.6
	347.5	40.04	134.8		357.7	44.53	135.6
	347.7	38.17	134.8		358.0	41.98	135.6
	348.0	39.66	134.9		358.2	43.46	135.6
	348.2	38.34	135.1		358.5	43.24	135.6
	348.5	38.91	135.2		358.7	41.86	135.6
	348.7	42.17	135.2		359.0	43.45	135.6
	349.0	38.37	135.3		359.2	44.64	135.6
	349.2	38.36	135.3		359.5	41.49	135.6
	349.5	37.10	135.3		359.7	42.63	135.6
	349.7	38.52	135.4		360.0	44.32	135.6
	350.0	40.12	135.4		360.2	43.05	135.6
	350.2	37.93	135.4		360.5	42.27	135.6
	350.5	39.97	135.4		360.7	44.06	135.6
	350.7	41.45	135.4		361.0	45.17	135.6
	351.0	39.10	135.4		361.2	41.55	135.6
	351.2	41.16	135.4		361.5	42.92	135.6
	351.5	42.81	135.5		361.7	44.21	135.6
	351.7	39.32	135.5		362.0	42.26	135.6
	352.0	41.28	135.5		362.2	42.46	135.6
	352.2	42.84	135.5		362.5	44.32	135.6
	352.5	39.37	135.5		362.7	44.37	135.6
	352.7	41.40	135.5		363.0	41.98	135.6
	353.0	42.99	135.5		363.2	43.81	135.6

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	363.5	45.12	135.7		373.7	43.18	135.8
	363.7	41.30	135.7		374.0	44.63	135.8
	364.0	42.67	135.7		374.2	42.19	135.8
	364.2	44.35	135.7		374.5	42.74	135.8
	364.5	45.06	135.7		374.7	42.58	135.8
	364.7	41.96	135.7		375.0	41.83	135.8
	365.0	43.76	135.7		375.2	42.98	135.8
	365.2	45.40	135.7		375.5	44.52	135.8
	365.5	42.00	135.7		375.7	44.58	135.8
	365.7	42.86	135.7		376.0	41.93	135.8
	366.0	44.41	135.7		376.2	43.52	135.8
	366.2	43.19	135.7		376.5	45.00	135.8
	366.5	41.67	135.7		376.7	43.97	135.8
	366.7	43.23	135.7		377.0	42.44	135.8
	367.0	44.74	135.7		377.2	44.00	135.8
	367.2	41.28	135.7		377.5	44.53	135.8
	367.5	42.90	135.7		377.7	41.37	135.8
	367.7	44.63	135.7		378.0	43.19	135.8
	368.0	43.55	135.7		378.2	44.47	135.8
	368.2	42.13	135.7		378.5	44.34	135.8
	368.5	43.78	135.7		378.7	42.12	135.8
	368.7	43.18	135.7		379.0	43.75	135.8
	369.0	41.26	135.7		379.2	45.25	135.8
	369.2	42.85	135.7		379.5	42.28	135.8
	369.5	44.24	135.7		379.7	42.36	135.8
	369.7	43.99	135.7		380.0	44.05	135.8
	370.0	41.49	135.7		380.2	45.36	135.8
	370.2	43.26	135.7		380.5	41.64	135.9
	370.5	44.60	135.7		380.7	43.18	135.9
	370.7	42.08	135.7		381.0	44.91	135.9
	371.0	42.17	135.7		381.2	42.97	135.9
	371.2	43.95	135.7		381.5	42.33	135.9
	371.5	45.05	135.7		381.7	44.07	135.9
	371.7	41.50	135.7		382.0	45.47	135.9
	372.0	43.26	135.7		382.2	41.21	135.9
	372.2	44.77	135.7		382.5	42.66	135.9
	372.5	42.18	135.8		382.7	44.35	135.9
	372.7	42.19	135.8		383.0	43.58	135.9
	373.0	43.99	135.8		383.2	42.21	135.9
	373.2	45.09	135.8		383.5	43.30	135.9
	373.5	41.61	135.8		383.7	44.88	135.9

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	384.0	43.23	135.9		394.2	43.39	136.0
	384.2	42.55	135.9		394.5	45.15	136.0
	384.5	44.23	135.9		394.7	45.20	136.1
	384.7	45.63	135.9		395.0	42.53	136.1
	385.0	41.92	135.9		395.2	44.13	136.1
	385.2	43.08	135.9		395.5	45.43	136.1
	385.5	44.64	135.9		395.7	41.72	136.1
	385.7	44.09	135.9		396.0	43.29	136.1
	386.0	42.15	135.9		396.2	44.78	136.1
	386.2	43.97	135.9		396.5	44.74	136.1
	386.5	45.40	135.9		396.7	42.14	136.1
	386.7	41.84	135.9		397.0	43.64	136.1
	387.0	43.16	135.9		397.2	45.31	136.1
	387.2	44.85	135.9		397.5	43.66	136.1
	387.5	43.19	135.9		397.7	42.74	136.1
	387.7	42.32	135.9		398.0	44.58	136.1
	388.0	43.92	136.0		398.2	45.48	136.1
	388.2	45.36	136.0		398.5	41.92	136.1
	388.5	42.10	136.0		398.7	43.43	136.1
	388.7	42.73	136.0		399.0	45.01	136.1
	389.0	43.94	136.0		399.2	44.84	136.1
	389.2	45.14	136.0		399.5	42.54	136.1
	389.5	42.65	136.0		399.7	44.28	136.1
	389.7	44.00	136.0		400.0	45.67	136.1
	390.0	45.37	136.0		400.2	42.70	136.1
	390.2	42.54	136.0		400.5	43.37	136.1
	390.5	42.61	136.0		400.7	45.06	136.1
	390.7	44.27	136.0		401.0	46.27	136.1
	391.0	45.31	136.0		401.2	42.11	136.2
	391.2	42.01	136.0		401.5	43.47	136.2
	391.5	43.42	136.0		401.7	45.19	136.2
	391.7	45.00	136.0		402.0	44.05	136.2
	392.0	43.52	136.0		402.2	43.88	136.2
	392.2	42.72	136.0		402.5	43.33	136.2
	392.5	44.36	136.0		402.7	44.75	136.2
	392.7	45.79	136.0		403.0	45.81	136.2
	393.0	42.30	136.0		403.2	41.92	136.2
	393.2	43.11	136.0		403.5	43.29	136.2
	393.5	44.71	136.0		403.7	44.96	136.2
	393.7	43.92	136.0		404.0	46.02	136.2
	394.0	41.83	136.0		404.2	42.17	136.2

Printing every 1 samples

Serial # 6752	Inside			Serial # 6752	Inside		
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	404.5	43.83	136.2		414.7	73.98	136.4
	404.7	45.24	136.2		415.0	74.86	136.4
	405.0	45.00	136.2		415.2	75.50	136.4
	405.2	42.56	136.2		415.5	76.24	136.4
	405.5	43.75	136.2		415.7	76.80	136.4
	405.7	45.27	136.2		416.0	77.72	136.4
	406.0	44.27	136.2		416.2	78.37	136.4
	406.2	43.00	136.2		416.5	79.37	136.4
	406.5	44.46	136.2		416.7	80.01	136.4
	406.7	45.45	136.2		417.0	80.80	136.4
	407.0	46.49	136.2		417.2	81.61	136.4
	407.2	47.39	136.2		417.5	82.28	136.4
Shut-In(2)	407.5	48.54	136.3		417.7	83.20	136.4
	407.7	49.59	136.3		418.0	83.94	136.4
	408.0	50.44	136.3		418.2	84.75	136.5
	408.2	51.53	136.3		418.5	85.32	136.5
	408.5	52.57	136.3		418.7	86.24	136.5
	408.7	53.46	136.3		419.0	87.06	136.5
	409.0	54.52	136.3		419.2	87.79	136.5
	409.2	55.44	136.3		419.5	88.46	136.5
	409.5	56.32	136.3		419.7	89.32	136.5
	409.7	57.29	136.3		420.0	90.11	136.5
	410.0	58.10	136.3		420.2	90.81	136.5
	410.2	59.09	136.3		420.5	91.57	136.5
	410.5	59.92	136.3		420.7	92.34	136.5
	410.7	60.80	136.3		421.0	93.02	136.5
	411.0	61.54	136.3		421.2	93.89	136.5
	411.2	62.42	136.3		421.5	94.54	136.5
	411.5	63.25	136.3		421.7	95.36	136.5
	411.7	64.09	136.3		422.0	96.13	136.5
	412.0	64.95	136.3		422.2	96.90	136.5
	412.2	65.78	136.3		422.5	97.72	136.5
	412.5	66.63	136.3		422.7	98.38	136.5
	412.7	67.55	136.4		423.0	99.14	136.5
	413.0	68.37	136.4		423.2	99.75	136.5
	413.2	69.23	136.4		423.5	100.60	136.5
	413.5	70.03	136.4		423.7	101.29	136.5
	413.7	70.83	136.4		424.0	102.08	136.5
	414.0	71.66	136.4		424.2	102.66	136.6
	414.2	72.44	136.4		424.5	103.57	136.6
	414.5	73.29	136.4		424.7	104.30	136.6

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	425.0	105.03	136.6		435.2	134.11	136.7
	425.2	105.76	136.6		435.5	135.00	136.7
	425.5	106.53	136.6		435.7	135.59	136.7
	425.7	107.13	136.6		436.0	136.42	136.7
	426.0	107.93	136.6		436.2	137.01	136.7
	426.2	108.59	136.6		436.5	137.73	136.7
	426.5	109.31	136.6		436.7	138.44	136.7
	426.7	110.06	136.6		437.0	139.11	136.7
	427.0	110.82	136.6		437.2	139.68	136.7
	427.2	111.63	136.6		437.5	140.54	136.8
	427.5	112.30	136.6		437.7	141.46	136.8
	427.7	112.94	136.6		438.0	141.68	136.8
	428.0	113.64	136.6		438.2	142.53	136.8
	428.2	114.38	136.6		438.5	143.20	136.8
	428.5	115.07	136.6		438.7	143.95	136.8
	428.7	115.86	136.6		439.0	144.62	136.8
	429.0	116.58	136.6		439.2	145.36	136.8
	429.2	117.23	136.6		439.5	145.95	136.8
	429.5	118.05	136.6		439.7	146.75	136.8
	429.7	118.87	136.6		440.0	147.31	136.8
	430.0	119.56	136.6		440.2	148.05	136.8
	430.2	120.11	136.6		440.5	148.74	136.8
	430.5	120.96	136.7		440.7	149.39	136.8
	430.7	121.52	136.7		441.0	150.10	136.8
	431.0	122.18	136.7		441.2	150.66	136.8
	431.2	123.08	136.7		441.5	151.43	136.8
	431.5	123.70	136.7		441.7	152.24	136.8
	431.7	124.43	136.7		442.0	152.80	136.8
	432.0	125.16	136.7		442.2	153.52	136.8
	432.2	125.78	136.7		442.5	154.23	136.8
	432.5	126.55	136.7		442.7	154.93	136.8
	432.7	127.24	136.7		443.0	155.65	136.8
	433.0	127.95	136.7		443.2	156.29	136.8
	433.2	128.69	136.7		443.5	156.97	136.8
	433.5	129.40	136.7		443.7	157.58	136.8
	433.7	130.07	136.7		444.0	158.27	136.8
	434.0	130.73	136.7		444.2	158.99	136.8
	434.2	131.55	136.7		444.5	159.64	136.9
	434.5	132.10	136.7		444.7	160.30	136.9
	434.7	132.78	136.7		445.0	160.93	136.9
	435.0	133.58	136.7		445.2	161.56	136.9

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	445.5	162.28	136.9		455.7	189.64	137.0
	445.7	163.02	136.9		456.0	190.38	137.0
	446.0	163.74	136.9		456.2	190.96	137.0
	446.2	164.29	136.9		456.5	191.55	137.0
	446.5	165.00	136.9		456.7	192.28	137.0
	446.7	165.74	136.9		457.0	193.02	137.0
	447.0	166.37	136.9		457.2	193.70	137.0
	447.2	167.18	136.9		457.5	194.23	137.0
	447.5	167.72	136.9		457.7	195.00	137.0
	447.7	168.48	136.9		458.0	195.58	137.0
	448.0	169.06	136.9		458.2	196.25	137.0
	448.2	169.65	136.9		458.5	196.86	137.0
	448.5	170.44	136.9		458.7	197.53	137.0
	448.7	171.03	136.9		459.0	198.29	137.1
	449.0	171.64	136.9		459.2	198.90	137.1
	449.2	172.42	136.9		459.5	199.59	137.1
	449.5	173.11	136.9		459.7	200.20	137.1
	449.7	173.62	136.9		460.0	200.98	137.1
	450.0	174.44	136.9		460.2	201.50	137.1
	450.2	175.15	136.9		460.5	202.24	137.1
	450.5	175.79	136.9		460.7	202.90	137.1
	450.7	176.39	136.9		461.0	203.55	137.1
	451.0	177.04	136.9		461.2	204.11	137.1
	451.2	177.71	136.9		461.5	204.82	137.1
	451.5	178.35	136.9		461.7	205.49	137.1
	451.7	179.13	137.0		462.0	206.20	137.1
	452.0	179.74	137.0		462.2	206.73	137.1
	452.2	180.42	137.0		462.5	207.33	137.1
	452.5	181.19	137.0		462.7	208.13	137.1
	452.7	181.80	137.0		463.0	208.78	137.1
	453.0	182.43	137.0		463.2	209.30	137.1
	453.2	183.13	137.0		463.5	210.05	137.1
	453.5	183.76	137.0		463.7	210.66	137.1
	453.7	184.30	137.0		464.0	211.32	137.1
	454.0	185.03	137.0		464.2	211.92	137.1
	454.2	185.85	137.0		464.5	212.52	137.1
	454.5	186.43	137.0		464.7	213.26	137.1
	454.7	186.94	137.0		465.0	213.97	137.1
	455.0	187.70	137.0		465.2	214.51	137.1
	455.2	188.45	137.0		465.5	215.18	137.1
	455.5	189.01	137.0		465.7	215.75	137.1

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	466.0	216.54	137.1		476.2	242.86	137.3
	466.2	217.18	137.2		476.5	243.39	137.3
	466.5	217.87	137.2		476.7	244.24	137.3
	466.7	218.46	137.2		477.0	244.84	137.3
	467.0	219.09	137.2		477.2	245.38	137.3
	467.2	219.79	137.2		477.5	246.10	137.3
	467.5	220.31	137.2		477.7	246.62	137.3
	467.7	221.04	137.2		478.0	247.16	137.3
	468.0	221.58	137.2		478.2	247.91	137.3
	468.2	222.29	137.2		478.5	248.44	137.3
	468.5	223.03	137.2		478.7	249.17	137.3
	468.7	223.58	137.2		479.0	250.19	137.3
	469.0	224.20	137.2		479.2	250.43	137.3
	469.2	224.89	137.2		479.5	251.09	137.3
	469.5	225.52	137.2		479.7	251.72	137.3
	469.7	226.17	137.2		480.0	252.36	137.3
	470.0	226.83	137.2		480.2	252.96	137.3
	470.2	227.39	137.2		480.5	253.56	137.3
	470.5	228.16	137.2		480.7	254.30	137.3
	470.7	228.76	137.2		481.0	254.98	137.3
	471.0	229.43	137.2		481.2	255.53	137.4
	471.2	230.07	137.2		481.5	256.05	137.4
	471.5	230.70	137.2		481.7	256.83	137.4
	471.7	231.41	137.2		482.0	257.42	137.4
	472.0	231.94	137.2		482.2	258.01	137.4
	472.2	232.62	137.2		482.5	258.61	137.4
	472.5	233.39	137.2		482.7	259.26	137.4
	472.7	233.93	137.2		483.0	259.95	137.4
	473.0	234.48	137.2		483.2	260.55	137.4
	473.2	235.51	137.2		483.5	261.25	137.4
	473.5	235.76	137.2		483.7	261.77	137.4
	473.7	236.41	137.3		484.0	262.43	137.4
	474.0	237.08	137.3		484.2	263.19	137.4
	474.2	237.76	137.3		484.5	263.70	137.4
	474.5	238.41	137.3		484.7	264.40	137.4
	474.7	239.00	137.3		485.0	265.03	137.4
	475.0	239.64	137.3		485.2	265.56	137.4
	475.2	240.29	137.3		485.5	266.24	137.4
	475.5	240.85	137.3		485.7	266.88	137.4
	475.7	241.48	137.3		486.0	267.42	137.4
	476.0	242.21	137.3		486.2	268.09	137.4

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	486.5	268.72	137.4		496.7	294.69	137.6
	486.7	269.37	137.4		497.0	294.94	137.6
	487.0	269.98	137.4		497.2	295.65	137.6
	487.2	271.03	137.4		497.5	296.28	137.6
	487.5	271.28	137.4		497.7	296.80	137.6
	487.7	271.99	137.4		498.0	297.45	137.6
	488.0	272.59	137.4		498.2	298.06	137.6
	488.2	273.11	137.4		498.5	298.73	137.6
	488.5	273.75	137.4		498.7	299.37	137.6
	488.7	274.42	137.5		499.0	299.94	137.6
	489.0	274.99	137.5		499.2	300.62	137.6
	489.2	275.70	137.5		499.5	301.14	137.6
	489.5	276.29	137.5		499.7	301.86	137.6
	489.7	276.97	137.5		500.0	302.50	137.6
	490.0	277.53	137.5		500.2	303.18	137.6
	490.2	278.57	137.5		500.5	303.71	137.6
	490.5	278.82	137.5		500.7	304.33	137.6
	490.7	279.47	137.5		501.0	304.93	137.6
	491.0	280.11	137.5		501.2	305.50	137.6
	491.2	280.74	137.5		501.5	306.08	137.6
	491.5	281.33	137.5		501.7	306.88	137.6
	491.7	281.88	137.5		502.0	307.44	137.6
	492.0	282.60	137.5		502.2	307.98	137.6
	492.2	283.22	137.5		502.5	308.57	137.6
	492.5	283.82	137.5		502.7	309.32	137.6
	492.7	284.39	137.5		503.0	309.84	137.6
	493.0	285.13	137.5		503.2	310.49	137.6
	493.2	285.65	137.5		503.5	311.17	137.6
	493.5	286.27	137.5		503.7	311.70	137.6
	493.7	286.90	137.5		504.0	312.43	137.7
	494.0	287.59	137.5		504.2	312.96	137.7
	494.2	288.22	137.5		504.5	313.50	137.7
	494.5	288.77	137.5		504.7	314.20	137.7
	494.7	289.49	137.5		505.0	314.79	137.7
	495.0	290.03	137.5		505.2	315.41	137.7
	495.2	290.70	137.5		505.5	316.03	137.7
	495.5	291.34	137.5		505.7	316.59	137.7
	495.7	291.93	137.5		506.0	317.25	137.7
	496.0	292.53	137.5		506.2	317.96	137.7
	496.2	293.09	137.5		506.5	318.52	137.7
	496.5	293.65	137.6		506.7	319.11	137.7

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	507.0	319.63	137.7		517.2	344.81	137.8
	507.2	320.36	137.7		517.5	345.37	137.8
	507.5	320.93	137.7		517.7	346.07	137.8
	507.7	321.54	137.7		518.0	346.58	137.8
	508.0	322.14	137.7		518.2	347.15	137.8
	508.2	322.74	137.7		518.5	347.81	137.8
	508.5	323.36	137.7		518.7	348.46	137.8
	508.7	324.08	137.7		519.0	349.04	137.8
	509.0	324.64	137.7		519.2	349.58	137.8
	509.2	325.23	137.7		519.5	350.22	137.9
	509.5	325.77	137.7		519.7	350.88	137.9
	509.7	326.45	137.7		520.0	351.43	137.9
	510.0	327.09	137.7		520.2	351.98	137.9
	510.2	327.69	137.7		520.5	352.92	137.9
	510.5	328.20	137.7		520.7	353.16	137.9
	510.7	328.89	137.7		521.0	353.89	137.9
	511.0	329.52	137.7		521.2	354.49	137.9
	511.2	330.14	137.7		521.5	354.99	137.9
	511.5	330.71	137.7		521.7	355.53	137.9
	511.7	331.31	137.7		522.0	356.56	137.9
	512.0	331.99	137.8		522.2	356.79	137.9
	512.2	332.58	137.8		522.5	357.43	137.9
	512.5	333.20	137.8		522.7	357.94	137.9
	512.7	333.80	137.8		523.0	359.00	137.9
	513.0	334.33	137.8		523.2	359.25	137.9
	513.2	335.14	137.8		523.5	359.80	137.9
	513.5	336.03	137.8		523.7	360.40	137.9
	513.7	336.24	137.8		524.0	361.33	137.9
	514.0	336.88	137.8		524.2	361.57	137.9
	514.2	337.53	137.8		524.5	362.33	137.9
	514.5	338.43	137.8		524.7	363.12	137.9
	514.7	338.67	137.8		525.0	363.34	137.9
	515.0	339.24	137.8		525.2	364.16	137.9
	515.2	339.88	137.8		525.5	364.90	137.9
	515.5	340.43	137.8		525.7	365.12	137.9
	515.7	341.19	137.8		526.0	365.76	137.9
	516.0	341.79	137.8		526.2	366.38	137.9
	516.2	342.34	137.8	End Shut-In(2)	526.5	367.31	137.9
	516.5	342.89	137.8		526.7	367.56	137.9
	516.7	343.50	137.8		527.0	368.23	137.9
	517.0	344.22	137.8		527.2	368.81	138.0

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
Final Hydro-static	527.5	368.11	138.0		537.7	2636.31	137.9
	527.7	2639.08	139.6		538.0	2636.56	137.9
	528.0	2662.54	140.3		538.2	2636.51	137.9
	528.2	2663.93	140.5		538.5	2636.05	137.9
	528.5	2661.62	140.7		538.7	2635.97	137.9
	528.7	2658.79	140.7		539.0	2635.89	137.9
	529.0	2656.36	140.8		539.2	2635.82	137.9
	529.2	2654.47	140.9		539.5	2635.72	137.9
	529.5	2570.43	141.1		539.7	2491.02	137.9
	529.7	2521.38	140.8		540.0	2470.47	137.5
	530.0	2561.56	139.6		540.2	2708.05	137.1
	530.2	2733.27	138.9		540.5	2697.05	136.9
	530.5	2722.86	138.6		540.7	2692.01	136.8
	530.7	2715.46	138.4		541.0	2684.50	136.7
	531.0	2708.98	138.3		541.2	2680.61	136.7
	531.2	2702.95	138.3		541.5	2677.04	136.7
	531.5	2697.50	138.2		541.7	2673.25	136.7
	531.7	2692.44	138.2		542.0	2669.59	136.7
	532.0	2687.12	138.1		542.2	2485.14	136.6
	532.2	2682.16	138.1		542.5	2638.83	136.4
	532.5	2677.45	138.1		542.7	2660.40	135.9
	532.7	2672.94	138.0		543.0	2656.81	135.8
	533.0	2668.94	138.0		543.2	2653.42	135.8
	533.2	2665.49	138.0		543.5	2650.31	135.8
	533.5	2662.20	138.0		543.7	2647.22	135.8
	533.7	2659.08	138.0		544.0	2643.82	135.8
	534.0	2656.08	138.0		544.2	2721.62	135.8
	534.2	2653.31	138.0		544.5	2699.07	135.7
	534.5	2650.73	138.0		544.7	2693.36	135.7
	534.7	2648.23	137.9		545.0	2689.01	135.8
	535.0	2645.81	137.9		545.2	2684.75	135.8
	535.2	2643.61	137.9		545.5	2680.20	135.8
	535.5	2641.51	137.9		545.7	2675.52	135.8
	535.7	2639.87	137.9		546.0	2505.15	135.7
	536.0	2638.35	137.9		546.2	2372.40	135.4
	536.2	2637.04	137.9		546.5	2431.00	135.1
	536.5	2636.31	137.9		546.7	2645.33	134.8
	536.7	2636.35	137.9		547.0	2633.93	134.5
	537.0	2636.49	137.9		547.2	2631.29	134.4
	537.2	2636.53	137.9		547.5	2628.56	134.4
	537.5	2636.47	137.9		547.7	2625.79	134.3

Printing every 1 samples

Serial # 6752				Serial # 6752			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	548.0	2620.97	134.3		558.2	2388.53	125.9
	548.2	2375.26	134.2		558.5	2385.61	125.9
	548.5	2374.61	133.7		558.7	2382.43	126.0
	548.7	2338.32	133.4		559.0	2193.38	125.9
	549.0	2527.61	133.1		559.2	2170.62	125.5
	549.2	2570.31	132.7		559.5	2130.67	124.9
	549.5	2567.53	132.5		559.7	2346.78	124.7
	549.7	2566.61	132.4		560.0	2340.15	124.7
	550.0	2564.88	132.3		560.2	2337.13	124.7
	550.2	2375.09	132.2		560.5	2235.38	124.7
	550.5	2360.37	132.1		560.7	2146.47	124.5
	550.7	2353.59	131.9		561.0	2120.83	124.2
	551.0	2573.11	131.5		561.2	2359.96	123.7
	551.2	2566.68	131.3		561.5	2295.17	123.6
	551.5	2564.45	131.2		561.7	2292.81	123.7
	551.7	2561.89	131.2		562.0	2289.64	123.7
	552.0	2456.11	131.1		562.2	2092.31	123.6
	552.2	2349.05	131.0		562.5	2301.24	123.5
	552.5	2308.59	130.8		562.7	2296.51	123.5
	552.7	2585.41	130.3		563.0	2292.39	123.5
	553.0	2529.30	130.1		563.2	2288.29	123.5
	553.2	2521.24	130.0		563.5	2284.05	123.5
	553.5	2517.43	130.0		563.7	2279.92	123.5
	553.7	2303.77	129.9		564.0	2275.72	123.5
	554.0	2300.47	129.9		564.2	2271.75	123.5
	554.2	2278.91	129.4		564.5	2267.84	123.4
	554.5	2481.14	128.9		564.7	2264.32	123.4
	554.7	2475.97	128.8		565.0	2261.67	123.4
	555.0	2472.79	128.7		565.2	2259.13	123.4
	555.2	2470.10	128.7		565.5	2105.67	123.4
	555.5	2277.62	128.7		565.7	2080.14	123.5
	555.7	2257.08	128.3		566.0	2050.40	123.4
	556.0	2231.70	127.7		566.2	2256.86	123.3
	556.2	2358.48	127.3		566.5	2250.18	123.3
	556.5	2434.73	127.3		566.7	2246.91	123.3
	556.7	2430.54	127.3		567.0	2243.22	123.3
	557.0	2427.63	127.2		567.2	2056.82	123.2
	557.2	2214.58	127.1		567.5	2039.91	123.0
	557.5	2218.06	127.0		567.7	2023.80	122.3
	557.7	2201.62	126.5		568.0	2208.72	121.6
	558.0	2412.71	126.0		568.2	2202.92	121.5

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	568.5	2199.40	121.5		578.7	1916.95	114.9
	568.7	2098.19	121.5		579.0	1913.34	114.9
	569.0	2019.75	121.3		579.2	1753.37	114.7
	569.2	1987.90	120.9		579.5	1738.31	114.6
	569.5	2226.80	120.5		579.7	1706.80	114.2
	569.7	2160.73	120.2		580.0	1887.72	113.9
	570.0	2156.95	120.1		580.2	1883.10	113.9
	570.2	2153.08	120.1		580.5	1880.39	113.9
	570.5	1983.89	119.9		580.7	1717.96	113.8
	570.7	1968.20	119.7		581.0	1706.71	113.5
	571.0	1947.43	119.7		581.2	1688.54	113.2
	571.2	2112.55	119.2		581.5	1843.12	113.1
	571.5	2110.04	119.0		581.7	1838.12	113.0
	571.7	2105.96	118.9		582.0	1834.00	113.0
	572.0	1934.05	118.8		582.2	1676.41	112.8
	572.2	1926.18	118.5		582.5	1664.55	112.5
	572.5	1907.52	118.0		582.7	1650.01	112.2
	572.7	2079.34	117.6		583.0	1796.11	111.8
	573.0	2067.97	117.7		583.2	1791.02	111.7
	573.2	2064.40	117.7		583.5	1786.35	111.6
	573.5	2000.44	117.7		583.7	1729.31	111.6
	573.7	1893.42	117.5		584.0	1848.81	111.6
	574.0	1853.10	117.4		584.2	1793.04	111.5
	574.2	2075.86	117.5		584.5	1788.29	111.4
	574.5	2024.41	117.4		584.7	1783.68	111.4
	574.7	2020.44	117.3		585.0	1789.11	111.4
	575.0	1982.42	117.3		585.2	1630.40	111.4
	575.2	1855.06	117.0		585.5	1625.92	111.3
	575.5	1830.70	116.8		585.7	1600.38	111.2
	575.7	1860.66	116.8		586.0	1750.43	111.1
	576.0	1982.74	116.5		586.2	1745.67	111.0
	576.2	1976.19	116.3		586.5	1742.17	111.0
	576.5	1972.26	116.3		586.7	1737.97	111.0
	576.7	1968.32	116.2		587.0	1586.91	110.8
	577.0	1808.15	116.0		587.2	1579.39	110.5
	577.2	1782.40	115.7		587.5	1556.51	110.1
	577.5	1779.32	115.3		587.7	1707.27	109.7
	577.7	1932.81	114.9		588.0	1700.11	109.7
	578.0	1928.35	114.8		588.2	1695.49	109.8
	578.2	1924.18	114.8		588.5	1658.56	109.8
	578.5	1920.00	114.8		588.7	1613.37	109.7

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	589.0	1540.74	109.6		599.2	1443.65	102.9
	589.2	1522.64	109.3		599.5	1380.98	102.8
	589.5	1669.08	109.0		599.7	1375.89	102.8
	589.7	1655.14	108.8		600.0	1372.38	102.8
	590.0	1651.85	108.8		600.2	1367.95	102.8
	590.2	1587.24	108.8		600.5	1251.13	102.8
	590.5	1517.67	108.6		600.7	1236.04	102.6
	590.7	1485.90	108.2		601.0	1212.30	102.2
	591.0	1690.25	108.1		601.2	1335.02	102.0
	591.2	1608.88	107.8		601.5	1329.00	102.0
	591.5	1606.51	107.8		601.7	1325.82	102.0
	591.7	1515.08	107.7		602.0	1206.72	101.9
	592.0	1470.78	107.5		602.2	1198.31	101.7
	592.2	1444.27	107.1		602.5	1178.14	101.3
	592.5	1583.88	106.6		602.7	1289.78	101.1
	592.7	1562.72	106.4		603.0	1284.14	101.0
	593.0	1558.45	106.5		603.2	1279.52	101.0
	593.2	1553.84	106.5		603.5	1274.87	101.0
	593.5	1436.31	106.4		603.7	1172.10	100.9
	593.7	1412.61	106.1		604.0	1157.42	100.5
	594.0	1417.09	105.9		604.2	1161.20	100.2
	594.2	1516.72	105.9		604.5	1239.35	100.0
	594.5	1513.17	105.9		604.7	1235.72	99.9
	594.7	1510.67	105.8		605.0	1233.72	100.0
	595.0	1393.02	105.7		605.2	1229.29	100.0
	595.2	1374.74	105.4		605.5	1225.45	100.0
	595.5	1354.27	104.9		605.7	1222.38	100.0
	595.7	1477.74	104.8		606.0	1220.18	100.0
	596.0	1468.94	104.8		606.2	1218.72	100.0
	596.2	1464.68	104.8		606.5	1218.51	100.0
	596.5	1363.43	104.8		606.7	1136.06	99.9
	596.7	1335.70	104.5		607.0	1114.42	99.9
	597.0	1318.79	104.2		607.2	1205.68	99.5
	597.2	1434.70	104.0		607.5	1192.57	99.2
	597.5	1424.58	103.9		607.7	1190.45	99.2
	597.7	1420.79	104.0		608.0	1186.33	99.2
	598.0	1416.61	104.0		608.2	1095.75	99.2
	598.2	1412.39	104.0		608.5	1075.42	98.9
	598.5	1365.62	104.0		608.7	1171.04	98.5
	598.7	1296.33	103.7		609.0	1147.14	98.3
	599.0	1262.29	103.3		609.2	1144.59	98.2

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	609.5	1140.93	98.3		619.7	842.06	92.8
	609.7	1074.51	98.2		620.0	828.84	92.7
	610.0	1055.57	98.2		620.2	826.89	92.7
	610.2	1032.48	97.9		620.5	826.76	92.7
	610.5	1112.29	97.5		620.7	770.38	92.7
	610.7	1100.02	97.4		621.0	762.84	92.5
	611.0	1098.27	97.4		621.2	739.35	92.3
	611.2	1043.69	97.4		621.5	785.21	92.0
	611.5	1011.89	97.4		621.7	783.10	92.0
	611.7	985.95	97.1		622.0	782.41	92.0
	612.0	1012.03	96.7		622.2	781.13	92.0
	612.2	1053.95	96.5		622.5	723.61	92.0
	612.5	1051.36	96.5		622.7	711.95	91.9
	612.7	1050.54	96.5		623.0	692.02	91.7
	613.0	972.25	96.5		623.2	738.09	91.4
	613.2	954.39	96.4		623.5	737.24	91.4
	613.5	936.76	96.3		623.7	735.64	91.4
	613.7	1010.09	96.0		624.0	686.70	91.4
	614.0	1007.99	96.0		624.2	675.87	91.3
	614.2	1006.72	96.0		624.5	654.53	91.1
	614.5	1004.05	96.0		624.7	694.17	91.0
	614.7	925.52	96.0		625.0	693.60	91.0
	615.0	910.43	95.9		625.2	692.51	91.0
	615.2	951.24	95.7		625.5	646.42	91.0
	615.5	964.64	95.5		625.7	628.27	90.8
	615.7	963.47	95.5		626.0	605.86	90.6
	616.0	960.85	95.4		626.2	648.20	90.4
	616.2	882.53	95.3		626.5	647.26	90.4
	616.5	868.79	95.1		626.7	645.99	90.4
	616.7	850.15	94.7		627.0	620.91	90.4
	617.0	919.38	94.5		627.2	593.88	90.4
	617.2	917.08	94.5		627.5	575.32	90.2
	617.5	880.61	94.5		627.7	604.20	90.1
	617.7	845.71	94.4		628.0	603.10	90.0
	618.0	823.11	94.2		628.2	601.85	90.0
	618.2	884.55	93.8		628.5	579.09	90.0
	618.5	873.90	93.7		628.7	556.04	90.1
	618.7	872.00	93.7		629.0	531.15	90.1
	619.0	841.25	93.7		629.2	562.17	89.9
	619.2	807.54	93.6		629.5	557.69	89.8
	619.5	782.49	93.2		629.7	556.91	89.9

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	630.0	555.61	89.9		640.2	226.12	90.4
	630.2	516.15	89.9		640.5	239.60	90.5
	630.5	498.02	89.8		640.7	239.63	90.5
	630.7	490.23	89.7		641.0	239.58	90.5
	631.0	512.80	89.6		641.2	219.54	90.5
	631.2	512.33	89.7		641.5	202.74	90.6
	631.5	512.54	89.7		641.7	181.53	90.7
	631.7	510.92	89.7		642.0	192.35	91.0
	632.0	510.26	89.7		642.2	193.58	91.0
	632.2	474.78	89.7		642.5	192.96	91.0
	632.5	455.57	89.7		642.7	192.89	91.0
	632.7	434.08	89.7		643.0	167.66	91.0
	633.0	467.35	89.6		643.2	151.12	91.1
	633.2	466.63	89.6		643.5	135.09	91.3
	633.5	466.42	89.6		643.7	148.62	91.5
	633.7	426.40	89.6		644.0	148.53	91.5
	634.0	411.71	89.6		644.2	148.88	91.5
	634.2	388.98	89.6		644.5	148.71	91.5
	634.5	421.60	89.6		644.7	149.38	91.5
	634.7	420.69	89.6		645.0	148.61	91.5
	635.0	420.47	89.6		645.2	148.29	91.5
	635.2	382.09	89.6		645.5	148.14	91.5
	635.5	364.36	89.6		645.7	149.22	91.5
	635.7	352.42	89.7		646.0	148.41	91.6
	636.0	375.77	89.7		646.2	148.17	91.6
	636.2	375.59	89.7		646.5	147.99	91.6
	636.5	374.68	89.7		646.7	147.87	91.6
	636.7	338.72	89.7		647.0	147.79	91.6
	637.0	320.77	89.7		647.2	147.76	91.6
	637.2	311.19	89.8		647.5	147.74	91.6
	637.5	330.06	89.9		647.7	147.73	91.6
	637.7	329.18	89.9		648.0	147.72	91.6
	638.0	328.95	89.9		648.2	147.72	91.6
	638.2	295.92	89.9		648.5	148.22	91.6
	638.5	277.76	90.0		648.7	133.46	91.6
	638.7	300.11	90.2		649.0	147.68	91.6
	639.0	284.72	90.2		649.2	149.03	91.6
	639.2	284.62	90.3		649.5	148.83	91.6
	639.5	284.52	90.3		649.7	121.80	91.6
	639.7	260.19	90.3		650.0	108.12	91.6
	640.0	238.57	90.3		650.2	81.62	91.6

Printing every 1 samples

Serial # 6752	Inside			Serial # 6752	Inside		
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	650.5	95.75	91.7		660.7	13.26	94.6
	650.7	103.91	91.7		661.0	15.59	94.8
	651.0	104.33	91.7		661.2	15.91	94.8
	651.2	104.25	91.7		661.5	16.03	94.8
	651.5	104.42	91.7		661.7	16.10	94.8
	651.7	103.95	91.7		662.0	16.14	94.8
	652.0	103.91	91.7		662.2	16.16	94.8
	652.2	103.90	91.8		662.5	16.17	94.8
	652.5	103.89	91.8		662.7	16.18	94.8
	652.7	103.87	91.8		663.0	16.23	94.8
	653.0	103.84	91.8		663.2	14.20	94.8
	653.2	103.86	91.8		663.5	14.14	94.9
	653.5	104.32	91.8		663.7	14.15	94.9
	653.7	104.32	91.8		664.0	14.15	94.9
	654.0	104.48	91.9		664.2	14.10	94.9
	654.2	87.18	91.9		664.5	14.07	94.9
	654.5	70.04	92.0		664.7	14.06	94.9
	654.7	45.71	92.3		665.0	14.06	94.9
	655.0	61.20	92.9		665.2	14.03	94.9
	655.2	61.32	93.1		665.5	14.03	94.9
	655.5	61.36	93.1		665.7	14.05	94.8
	655.7	61.49	93.2		666.0	14.06	94.8
	656.0	61.50	93.2		666.2	14.07	94.8
	656.2	61.53	93.2		666.5	14.07	94.8
	656.5	61.59	93.2		666.7	14.08	94.8
	656.7	61.58	93.2		667.0	14.08	94.8
	657.0	61.48	93.2		667.2	14.08	94.8
	657.2	61.82	93.2		667.5	14.09	94.8
	657.5	61.74	93.2		667.7	14.10	94.8
	657.7	61.65	93.2		668.0	14.11	94.8
	658.0	61.84	93.2		668.2	14.12	94.8
	658.2	61.46	93.2		668.5	14.12	94.8
	658.5	61.43	93.1		668.7	14.12	94.8
	658.7	61.43	93.1		669.0	14.12	94.8
	659.0	61.42	93.1		669.2	14.12	94.8
	659.2	61.49	93.1		669.5	14.12	94.8
	659.5	63.49	93.1		669.7	14.12	94.8
	659.7	59.75	93.1		670.0	14.12	94.8
	660.0	46.43	93.1		670.2	14.12	94.8
	660.2	24.45	93.2		670.5	14.12	94.8
	660.5	8.33	94.0		670.7	14.13	94.8

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	671.0	14.13	94.8		681.2	15.08	94.6
	671.2	14.13	94.8		681.5	15.09	94.6
	671.5	14.13	94.8		681.7	15.12	94.6
	671.7	14.12	94.8		682.0	15.14	94.6
	672.0	14.11	94.8		682.2	15.14	94.6
	672.2	14.10	94.8		682.5	15.15	94.6
	672.5	14.12	94.8		682.7	15.16	94.6
	672.7	14.10	94.8		683.0	15.16	94.6
	673.0	16.86	94.8		683.2	15.18	94.6
	673.2	17.51	94.9		683.5	15.19	94.6
	673.5	17.54	94.9		683.7	15.17	94.6
	673.7	17.57	94.9		684.0	15.19	94.6
	674.0	17.58	94.9		684.2	15.20	94.6
	674.2	17.60	94.9		684.5	14.44	94.6
	674.5	17.62	94.9		684.7	12.55	94.6
	674.7	17.64	94.9		685.0	12.53	94.5
	675.0	17.67	94.9		685.2	12.53	94.5
	675.2	17.68	94.9		685.5	12.49	94.5
	675.5	17.69	94.9		685.7	12.53	94.5
	675.7	17.71	94.9		686.0	9.46	94.6
	676.0	17.72	94.9		686.2	9.59	95.0
	676.2	17.73	94.9		686.5	9.63	95.1
	676.5	17.73	94.9		686.7	9.62	95.1
	676.7	17.74	94.9		687.0	9.62	95.2
	677.0	17.73	94.9		687.2	10.47	95.2
	677.2	17.73	94.9		687.5	12.65	95.3
	677.5	17.73	94.9		687.7	12.90	95.1
	677.7	17.74	94.9		688.0	12.90	95.0
	678.0	17.75	94.9		688.2	12.91	94.9
	678.2	17.76	94.9		688.5	11.27	94.9
	678.5	17.75	94.9		688.7	10.14	95.0
	678.7	17.75	94.9		689.0	9.93	95.1
	679.0	17.73	94.9		689.2	10.85	95.2
	679.2	17.76	94.9		689.5	10.89	95.3
	679.5	15.97	94.9		689.7	10.90	95.3
	679.7	13.14	94.8		690.0	10.96	95.3
	680.0	14.95	94.7		690.2	7.92	95.3
	680.2	14.92	94.7		690.5	7.97	95.5
	680.5	14.98	94.6		690.7	7.00	95.5
	680.7	15.04	94.6		691.0	7.07	95.6
	681.0	15.06	94.6		691.2	7.04	95.7

Printing every 1 samples

Serial # 6752 Inside				Serial # 6752 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	691.5	5.44	95.9		701.7	3.70	79.5
	691.7	4.41	96.5		702.0	3.70	79.8
	692.0	4.45	97.2		702.2	3.70	80.0
	692.2	3.47	97.5		702.5	3.71	80.2
	692.5	3.50	96.6		702.7	3.71	80.4
	692.7	3.48	95.4		703.0	3.71	80.6
	693.0	3.46	94.6		703.2	3.71	80.8
	693.2	3.45	93.9		703.5	3.72	81.0
	693.5	3.45	93.2		703.7	3.72	81.0
	693.7	3.45	92.6		704.0	3.72	81.0
	694.0	3.44	91.6		704.2	3.72	81.1
	694.2	3.45	89.9		704.5	3.71	81.3
	694.5	3.86	86.3		704.7	3.71	81.5
	694.7	3.70	82.8		705.0	3.70	81.6
	695.0	3.59	80.2		705.2	3.70	81.6
	695.2	3.52	78.3		705.5	3.70	81.5
	695.5	3.44	77.3		705.7	3.71	81.6
	695.7	3.39	76.7		706.0	3.70	81.7
	696.0	3.37	76.5		706.2	3.71	81.9
	696.2	3.36	76.4		706.5	3.70	82.0
	696.5	3.37	76.5		706.7	3.70	82.2
	696.7	3.40	76.6		707.0	3.69	82.4
	697.0	3.43	76.8		707.2	3.68	82.5
	697.2	3.46	76.9		707.5	3.66	82.3
	697.5	3.49	77.0		707.7	3.69	82.5
	697.7	3.52	76.9		708.0	3.66	82.7
	698.0	3.54	76.9		708.2	3.71	83.0
	698.2	3.55	77.0		708.5	3.71	83.3
	698.5	3.58	77.1		708.7	3.73	83.7
	698.7	3.59	77.3		709.0	3.70	84.1
	699.0	3.61	77.5		709.2	3.71	84.5
	699.2	3.62	77.7		709.5	3.66	84.9
	699.5	3.63	78.0		709.7	3.71	85.2
	699.7	3.64	78.2		710.0	3.67	85.5
	700.0	3.65	78.4		710.2	3.55	86.0
	700.2	3.67	78.7		710.5	3.48	86.5
	700.5	3.67	78.9				
	700.7	3.67	79.0				
	701.0	3.68	79.0				
	701.2	3.69	79.1				
	701.5	3.69	79.3				

Printing every 1 samples



Weatherford®
Completion Systems

DRILL STEM TESTING - DATA LISTING

EOG Resources

3817 NW Expressway
STE 500
Oklahoma City OK, 73112
ATTN: Dale Passig

KUEA 21-#1

21/33/39

Job Ticket: 27248

DST#: 1

Test Start: 2008.09.24 @ 05:20:46

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	0.0	-1.41	79.2		0.6	-1.35	80.1
	0.0	-1.43	79.3		0.6	-1.35	80.1
	0.0	-1.36	79.4		0.6	-1.36	80.1
	0.1	-1.38	79.5		0.6	-1.35	80.1
	0.1	-1.39	79.6		0.6	-1.35	80.1
	0.1	-1.39	79.6		0.6	-1.36	80.1
	0.1	-1.39	79.7		0.6	-1.36	80.1
	0.1	-1.39	79.8		0.7	-1.35	80.1
	0.1	-1.38	79.8		0.7	-1.35	80.1
	0.2	-1.38	79.9		0.7	-1.35	80.1
	0.2	-1.38	79.9		0.7	-1.35	80.1
	0.2	-1.37	80.0		0.7	-1.34	80.1
	0.2	-1.37	80.0		0.8	-1.34	80.1
	0.2	-1.36	80.0		0.8	-1.34	80.1
	0.2	-1.35	80.0		0.8	-1.33	80.1
	0.3	-1.35	80.0		0.8	-1.32	80.1
	0.3	-1.34	80.1		0.8	-1.31	80.1
	0.3	-1.34	80.1		0.8	-1.32	80.1
	0.3	-1.33	80.1		0.9	-1.32	80.1
	0.3	-1.33	80.1		0.9	-1.31	80.1
	0.3	-1.33	80.1		0.9	-1.31	80.1
	0.3	-1.33	80.1		0.9	-1.31	80.1
	0.4	-1.33	80.1		0.9	-1.31	80.1
	0.4	-1.33	80.1		0.9	-1.31	80.1
	0.4	-1.33	80.1		0.9	-1.31	80.1
	0.4	-1.33	80.1		1.0	-1.31	80.1
	0.4	-1.33	80.1		1.0	-1.31	80.1
	0.4	-1.33	80.1		1.0	-1.31	80.1
	0.5	-1.34	80.1		1.0	-1.32	80.1
	0.5	-1.34	80.1		1.0	-1.32	80.1
	0.5	-1.34	80.1		1.0	-1.32	80.1
	0.5	-1.35	80.1		1.1	-1.32	80.1
	0.5	-1.35	80.1		1.1	-1.32	80.1

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	1.1	-1.32	80.1		1.8	-1.34	80.0
	1.1	-1.32	80.1		1.8	-1.35	80.0
	1.1	-1.32	80.1		1.8	-1.35	80.0
	1.1	-1.32	80.1		1.8	-1.35	80.0
	1.2	-1.32	80.1		1.9	-1.35	80.0
	1.2	-1.32	80.0		1.9	-1.36	80.0
	1.2	-1.32	80.0		1.9	-1.35	80.0
	1.2	-1.32	80.0		1.9	-1.36	80.0
	1.2	-1.32	80.0		1.9	-1.36	80.0
	1.3	-1.32	80.0		1.9	-1.37	80.0
	1.3	-1.32	80.0		2.0	-1.38	80.0
	1.3	-1.33	80.0		2.0	-1.38	80.0
	1.3	-1.33	80.0		2.0	-1.40	80.0
	1.3	-1.33	80.0		12.0	-1.43	80.2
	1.3	-1.33	80.0		22.0	-1.36	81.3
	1.4	-1.32	80.0		32.0	-1.85	69.1
	1.4	-1.32	80.0		42.0	-1.83	63.2
	1.4	-1.32	80.0		52.0	-1.83	59.7
	1.4	-1.32	80.0		62.0	-1.81	57.8
	1.4	-1.32	80.0		72.0	-1.12	91.1
	1.4	-1.32	80.0		82.0	10.36	92.8
	1.5	-1.32	80.0		92.0	96.35	99.8
	1.5	-1.33	80.0		92.2	96.23	99.8
	1.5	-1.33	80.0		92.5	96.13	99.9
	1.5	-1.33	80.0		92.7	96.12	99.9
	1.5	-1.33	80.0		93.0	96.06	99.9
	1.5	-1.33	80.0		93.2	97.77	100.0
	1.5	-1.33	80.0		93.5	97.05	100.0
	1.6	-1.33	80.0		93.7	97.04	100.0
	1.6	-1.33	80.0		94.0	96.95	100.0
	1.6	-1.34	80.0		94.2	127.57	100.0
	1.6	-1.33	80.0		94.5	143.90	100.2
	1.6	-1.34	80.0		94.7	147.33	100.5
	1.6	-1.34	80.0		95.0	144.87	100.7
	1.7	-1.34	80.0		95.2	142.28	100.8
	1.7	-1.34	80.0		95.5	141.25	100.8
	1.7	-1.34	80.0		95.7	141.07	100.9
	1.7	-1.33	80.0		96.0	141.12	100.9
	1.7	-1.33	80.0		96.2	140.35	100.9
	1.8	-1.33	80.0		96.5	140.12	101.0
	1.8	-1.33	80.0		96.7	139.93	101.0

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	97.0	139.85	101.0		107.2	184.09	101.0
	97.2	139.78	101.0		107.5	184.11	101.0
	97.5	139.75	101.0		107.7	184.15	101.0
	97.7	139.75	101.0		108.0	183.91	101.0
	98.0	139.73	101.0		108.2	184.39	101.0
	98.2	139.69	101.0		108.5	184.40	101.0
	98.5	141.34	101.0		108.7	186.15	101.0
	98.7	141.16	101.0		109.0	209.19	100.9
	99.0	140.47	101.0		109.2	266.41	100.9
	99.2	215.20	101.1		109.5	239.46	100.9
	99.5	184.86	101.0		109.7	233.07	100.9
	99.7	187.11	101.0		110.0	232.41	100.9
	100.0	186.39	101.0		110.2	231.84	100.9
	100.2	185.61	101.0		110.5	221.60	100.9
	100.5	185.15	101.0		110.7	295.08	100.9
	100.7	185.16	101.0		111.0	279.99	100.8
	101.0	184.65	101.0		111.2	279.06	100.7
	101.2	184.53	101.1		111.5	278.36	100.7
	101.5	184.44	101.1		111.7	278.40	100.7
	101.7	184.37	101.0		112.0	278.42	100.7
	102.0	184.32	101.0		112.2	321.77	100.7
	102.2	184.27	101.1		112.5	357.61	100.7
	102.5	184.21	101.1		112.7	324.14	100.6
	102.7	184.16	101.0		113.0	322.95	100.5
	103.0	184.12	101.0		113.2	322.80	100.5
	103.2	184.09	101.0		113.5	322.90	100.5
	103.5	184.07	101.0		113.7	352.17	100.5
	103.7	184.05	101.0		114.0	431.64	100.4
	104.0	184.03	101.0		114.2	370.15	100.3
	104.2	184.01	101.0		114.5	369.38	100.4
	104.5	184.00	101.0		114.7	368.82	100.4
	104.7	183.98	101.0		115.0	368.88	100.4
	105.0	184.00	101.0		115.2	407.49	100.4
	105.2	184.03	101.0		115.5	464.97	100.5
	105.5	184.03	101.0		115.7	415.72	100.4
	105.7	184.03	101.0		116.0	414.79	100.4
	106.0	184.04	101.0		116.2	414.31	100.4
	106.2	184.04	101.0		116.5	414.45	100.5
	106.5	184.05	101.0		116.7	469.31	100.5
	106.7	184.05	101.0		117.0	485.14	100.6
	107.0	184.07	101.0		117.2	460.78	100.8

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	117.5	460.10	100.8		127.7	684.27	102.8
	117.7	459.55	100.9		128.0	729.30	102.8
	118.0	459.65	100.9		128.2	773.54	102.9
	118.2	493.08	101.0		128.5	726.60	103.1
	118.5	570.68	101.1		128.7	730.92	103.4
	118.7	505.59	101.3		129.0	729.70	103.4
	119.0	504.56	101.4		129.2	728.77	103.5
	119.2	504.35	101.5		129.5	728.02	103.5
	119.5	471.97	101.5		129.7	727.29	103.5
	119.7	567.80	101.6		130.0	727.14	103.5
	120.0	559.94	101.6		130.2	745.30	103.5
	120.2	550.50	101.8		130.5	791.05	103.5
	120.5	549.77	101.9		130.7	821.94	103.5
	120.7	549.16	101.9		131.0	776.92	103.4
	121.0	548.84	101.9		131.2	775.63	103.5
	121.2	548.99	102.0		131.5	774.43	103.6
	121.5	548.95	102.0		131.7	773.51	103.6
	121.7	551.59	102.0		132.0	784.27	103.7
	122.0	588.93	102.0		132.2	832.51	103.8
	122.2	620.97	102.2		132.5	954.46	103.9
	122.5	603.90	102.5		132.7	822.76	103.9
	122.7	596.13	102.6		133.0	820.69	103.9
	123.0	594.91	102.7		133.2	819.19	104.0
	123.2	594.29	102.7		133.5	818.36	104.0
	123.5	593.57	102.7		133.7	873.78	104.0
	123.7	598.48	102.7		134.0	901.39	103.9
	124.0	633.96	102.7		134.2	913.03	104.0
	124.2	647.96	102.7		134.5	867.71	104.0
	124.5	659.46	102.4		134.7	865.87	103.9
	124.7	663.27	102.6		135.0	864.14	103.9
	125.0	641.96	102.7		135.2	863.52	103.9
	125.2	640.57	102.6		135.5	924.37	103.9
	125.5	639.30	102.6		135.7	939.96	103.9
	125.7	601.14	102.5		136.0	985.59	103.8
	126.0	679.59	102.6		136.2	914.91	103.7
	126.2	689.43	102.6		136.5	912.19	103.8
	126.5	710.06	102.8		136.7	909.76	103.9
	126.7	692.86	103.0		137.0	908.29	103.9
	127.0	687.97	102.9		137.2	972.80	104.0
	127.2	686.23	102.9		137.5	1003.46	104.0
	127.5	684.84	102.8		137.7	1049.23	104.2

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	138.0	957.63	104.4		148.2	1271.53	106.5
	138.2	955.23	104.5		148.5	1312.01	106.7
	138.5	953.53	104.5		148.7	1294.18	106.8
	138.7	953.78	104.5		149.0	1228.14	106.7
	139.0	1026.23	104.6		149.2	1225.02	106.6
	139.2	1066.24	104.6		149.5	1222.99	106.6
	139.5	1016.10	104.5		149.7	1220.14	106.6
	139.7	1002.33	104.7		150.0	1326.74	106.7
	140.0	1000.01	104.9		150.2	1369.60	106.9
	140.2	998.22	105.0		150.5	1267.34	106.8
	140.5	1006.93	105.0		150.7	1273.80	107.1
	140.7	1075.12	105.1		151.0	1270.88	107.2
	141.0	1113.70	105.2		151.2	1268.58	107.3
	141.2	1046.83	105.2		151.5	1358.15	107.5
	141.5	1046.84	105.4		151.7	1396.31	107.6
	141.7	1043.91	105.4		152.0	1474.31	107.6
	142.0	1041.69	105.4		152.2	1322.06	107.7
	142.2	1040.49	105.5		152.5	1318.20	107.9
	142.5	1039.63	105.5		152.7	1314.89	107.9
	142.7	1132.69	105.5		153.0	1312.53	107.9
	143.0	1143.53	105.5		153.2	1441.41	108.0
	143.2	1106.35	105.5		153.5	1446.27	108.1
	143.5	1090.95	105.6		153.7	1531.80	108.2
	143.7	1088.72	105.6		154.0	1364.90	108.3
	144.0	1086.92	105.6		154.2	1362.71	108.5
	144.2	1085.77	105.7		154.5	1359.92	108.6
	144.5	1127.98	105.7		154.7	1329.36	108.6
	144.7	1172.33	105.7		155.0	1485.52	108.8
	145.0	1204.87	105.8		155.2	1492.95	108.8
	145.2	1149.86	105.9		155.5	1551.45	108.8
	145.5	1137.73	106.0		155.7	1410.44	108.7
	145.7	1134.82	106.1		156.0	1408.17	108.8
	146.0	1132.87	106.2		156.2	1405.38	108.8
	146.2	1218.36	106.3		156.5	1386.27	108.8
	146.5	1229.16	106.2		156.7	1525.47	109.0
	146.7	1263.72	106.3		157.0	1606.54	109.3
	147.0	1187.39	106.2		157.2	1455.31	109.3
	147.2	1183.34	106.3		157.5	1455.90	109.4
	147.5	1179.83	106.4		157.7	1452.86	109.4
	147.7	1177.52	106.4		158.0	1450.27	109.4
	148.0	1185.43	106.4		158.2	1448.32	109.4

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	158.5	1447.06	109.4		168.7	1766.97	111.9
	158.7	1446.15	109.4		169.0	1771.26	111.9
	159.0	1445.45	109.5		169.2	1772.57	112.0
	159.2	1444.92	109.5		169.5	1697.52	112.3
	159.5	1444.30	109.5		169.7	1692.14	112.6
	159.7	1444.20	109.5		170.0	1687.07	112.7
	160.0	1444.97	109.5		170.2	1686.00	112.8
	160.2	1561.25	109.6		170.5	1676.53	112.9
	160.5	1613.36	109.8		170.7	1752.59	113.0
	160.7	1499.63	109.7		171.0	1812.84	113.0
	161.0	1503.73	109.9		171.2	1817.12	113.0
	161.2	1499.98	110.1		171.5	1824.47	113.2
	161.5	1496.93	110.1		171.7	1812.21	113.4
	161.7	1504.72	110.2		172.0	1750.40	113.5
	162.0	1620.52	110.4		172.2	1743.73	113.5
	162.2	1686.54	110.4		172.5	1738.33	113.4
	162.5	1551.88	110.3		172.7	1733.24	113.4
	162.7	1550.85	110.4		173.0	1728.38	113.4
	163.0	1546.30	110.5		173.2	1724.12	113.4
	163.2	1542.83	110.5		173.5	1720.32	113.4
	163.5	1563.04	110.6		173.7	1717.34	113.4
	163.7	1678.42	110.7		174.0	1723.05	113.4
	164.0	1798.53	110.9		174.2	1866.59	113.4
	164.2	1601.24	110.8		174.5	1871.87	113.4
	164.5	1596.70	111.0		174.7	1875.72	113.4
	164.7	1592.15	111.1		175.0	1807.49	113.5
	165.0	1588.50	111.2		175.2	1783.27	113.6
	165.2	1575.45	111.2		175.5	1778.35	113.7
	165.5	1702.15	111.4		175.7	1773.73	113.7
	165.7	1712.12	111.5		176.0	1780.62	113.7
	166.0	1723.01	111.4		176.2	1908.14	113.8
	166.2	1728.31	111.4		176.5	1919.13	113.9
	166.5	1646.78	111.5		176.7	1942.49	114.2
	166.7	1641.80	111.5		177.0	1814.29	114.3
	167.0	1637.01	111.5		177.2	1819.60	114.5
	167.2	1632.67	111.6		177.5	1816.28	114.6
	167.5	1629.08	111.6		177.7	1812.82	114.6
	167.7	1627.12	111.6		178.0	1821.69	114.7
	168.0	1625.71	111.6		178.2	1965.32	114.8
	168.2	1628.19	111.6		178.5	2014.87	114.8
	168.5	1758.76	111.7		178.7	1862.66	114.8

Printing every 1 samples

Serial # 8321				Serial # 8321			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	179.0	1889.39	115.0		189.2	2004.11	117.6
	179.2	1882.31	115.1		189.5	1999.94	117.6
	179.5	1877.07	115.1		189.7	1996.67	117.6
	179.7	1872.16	115.2		190.0	1993.94	117.6
	180.0	1867.46	115.2		190.2	1992.00	117.6
	180.2	1863.30	115.2		190.5	1989.68	117.6
	180.5	1859.68	115.2		190.7	1988.11	117.6
	180.7	1856.39	115.2		191.0	2003.20	117.6
	181.0	1853.56	115.3		191.2	2189.32	117.6
	181.2	1852.11	115.3		191.5	2291.65	117.4
	181.5	2032.83	115.3		191.7	2052.36	117.3
	181.7	2073.95	115.4		192.0	2049.32	117.3
	182.0	1950.60	115.5		192.2	2046.05	117.3
	182.2	1912.54	115.8		192.5	2043.11	117.3
	182.5	1909.38	116.0		192.7	2037.09	117.3
	182.7	1906.02	116.1		193.0	2220.08	117.4
	183.0	1902.94	116.1		193.2	2345.54	117.5
	183.2	1900.25	116.1		193.5	2104.45	117.7
	183.5	1899.35	116.1		193.7	2100.13	118.0
	183.7	1941.19	116.1		194.0	2095.74	118.1
	184.0	1968.28	116.1		194.2	2091.60	118.2
	184.2	1937.05	116.1		194.5	2088.24	118.2
	184.5	1930.91	116.1		194.7	2090.12	118.3
	184.7	1925.40	116.1		195.0	2280.85	118.2
	185.0	1920.16	116.1		195.2	2363.49	118.2
	185.2	2040.52	116.1		195.5	2140.35	118.4
	185.5	2081.93	116.1		195.7	2138.38	118.7
	185.7	2094.71	116.1		196.0	2135.60	118.8
	186.0	1944.39	116.0		196.2	2132.88	118.9
	186.2	1957.58	116.2		196.5	2271.18	119.2
	186.5	1954.52	116.2		196.7	2303.50	119.5
	186.7	1951.31	116.3		197.0	2335.55	119.4
	187.0	1948.42	116.3		197.2	2179.52	119.1
	187.2	1902.67	116.3		197.5	2186.12	119.2
	187.5	2147.22	116.4		197.7	2183.54	119.3
	187.7	2142.06	116.5		198.0	2180.60	119.4
	188.0	1981.64	116.5		198.2	2177.95	119.4
	188.2	2024.08	117.1		198.5	2175.74	119.5
	188.5	2018.60	117.4		198.7	2219.77	119.5
	188.7	2013.49	117.5		199.0	2373.37	119.7
	189.0	2008.49	117.6		199.2	2471.05	120.0

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	199.5	2232.70	119.8		209.7	2456.25	122.9
	199.7	2230.87	119.7		210.0	2446.07	123.0
	200.0	2227.94	119.7		210.2	2648.86	123.4
	200.2	2225.06	119.6		210.5	2683.41	123.5
	200.5	2379.14	119.8		210.7	2498.85	123.5
	200.7	2424.19	120.1		211.0	2505.33	124.1
	201.0	2468.88	120.3		211.2	2503.21	124.3
	201.2	2275.90	120.2		211.5	2500.60	124.4
	201.5	2275.05	120.1		211.7	2690.53	124.8
	201.7	2272.72	120.0		212.0	2715.95	124.7
	202.0	2270.27	120.0		212.2	2798.61	124.7
	202.2	2268.02	120.0		212.5	2561.21	124.5
	202.5	2266.51	120.0		212.7	2556.58	124.5
	202.7	2443.81	120.3		213.0	2551.88	124.5
	203.0	2467.52	120.5		213.2	2547.82	124.5
	203.2	2554.42	120.7		213.5	2695.89	124.7
	203.5	2321.88	120.8		213.7	2744.83	125.0
	203.7	2320.95	120.8		214.0	2713.79	124.9
	204.0	2318.66	120.8		214.2	2711.46	124.8
	204.2	2316.11	120.8		214.5	2603.41	125.0
	204.5	2383.13	120.8		214.7	2599.10	125.3
	204.7	2508.07	120.9		215.0	2594.87	125.5
	205.0	2569.04	120.8		215.2	2591.02	125.6
	205.2	2367.70	120.8		215.5	2587.83	125.7
	205.5	2368.70	120.8		215.7	2585.31	125.8
	205.7	2365.89	120.8		216.0	2583.47	125.9
	206.0	2355.89	120.8		216.2	2581.79	125.9
	206.2	2544.07	121.2		216.5	2580.46	126.0
	206.5	2566.13	121.3		216.7	2579.50	126.0
	206.7	2575.54	121.6		217.0	2578.74	126.0
	207.0	2414.45	121.6		217.2	2546.53	126.0
	207.2	2412.79	121.7		217.5	2653.99	126.3
	207.5	2410.00	121.7		217.7	2744.89	126.3
	207.7	2407.29	121.7		218.0	2622.80	126.0
	208.0	2405.09	121.7		218.2	2612.78	126.1
	208.2	2403.20	121.7		218.5	2609.11	126.3
	208.5	2578.68	122.1		218.7	2605.47	126.4
	208.7	2596.72	122.2		219.0	2602.37	126.4
	209.0	2629.07	122.7		219.2	2599.80	126.4
	209.2	2456.37	122.8		219.5	2586.50	126.5
	209.5	2458.34	122.9		219.7	2767.15	126.6

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	220.0	2695.14	126.5		230.2	2665.90	128.1
	220.2	2635.65	126.3		230.5	2827.55	128.5
	220.5	2630.69	126.3		230.7	2824.43	128.5
	220.7	2625.86	126.2		231.0	2711.24	128.4
	221.0	2621.35	126.2		231.2	2706.35	128.4
	221.2	2617.43	126.2		231.5	2701.79	128.5
	221.5	2614.43	126.2		231.7	2697.48	128.5
	221.7	2612.20	126.2		232.0	2608.75	128.4
	222.0	2792.19	126.3		232.2	2815.02	129.0
	222.2	2780.73	126.5		232.5	2812.88	129.1
	222.5	2650.87	126.8		232.7	2815.12	129.2
	222.7	2645.85	126.8		233.0	2792.02	129.1
	223.0	2641.22	126.7		233.2	2694.99	129.1
	223.2	2636.81	126.7		233.5	2558.95	129.7
	223.5	2633.08	126.7		233.7	2665.47	131.4
	223.7	2556.46	126.6		234.0	2719.72	131.8
	224.0	2795.31	127.0		234.2	2713.98	131.9
	224.2	2795.25	127.4		234.5	2709.00	132.0
	224.5	2661.83	127.3		234.7	2704.11	132.0
	224.7	2657.53	127.3		235.0	2699.35	132.0
	225.0	2653.45	127.2		235.2	2695.34	132.0
	225.2	2649.50	127.2		235.5	2691.95	132.0
	225.5	2646.10	127.2		235.7	2689.25	132.0
	225.7	2643.43	127.2		236.0	2687.10	132.1
	226.0	2641.76	127.2		236.2	2685.50	132.1
	226.2	2829.52	127.5		236.5	2684.18	132.1
	226.5	2812.99	127.8		236.7	2683.10	132.1
	226.7	2682.81	127.8		237.0	2682.40	132.1
	227.0	2677.25	127.7		237.2	2681.74	132.1
	227.2	2672.49	127.6		237.5	2681.04	132.1
	227.5	2667.91	127.5		237.7	2680.25	132.1
	227.7	2663.84	127.5		238.0	2680.01	132.1
	228.0	2660.54	127.5		238.2	2679.41	132.1
	228.2	2586.93	127.4		238.5	2678.63	132.1
	228.5	2838.33	127.8		238.7	2678.42	132.1
	228.7	2807.94	127.9		239.0	2677.94	132.1
	229.0	2692.05	127.9		239.2	2677.52	132.1
	229.2	2687.84	127.9		239.5	2676.83	132.1
	229.5	2683.62	128.0		239.7	2676.61	132.1
	229.7	2679.78	128.0		240.0	2675.87	132.1
	230.0	2676.57	128.0		240.2	2675.67	132.1

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	240.5	2675.28	132.1		250.7	2691.06	130.4
	240.7	2674.86	132.1		251.0	2689.98	130.4
	241.0	2674.54	132.1		251.2	2688.94	130.4
	241.2	2674.10	132.1		251.5	2687.99	130.3
	241.5	2673.70	132.1		251.7	2687.38	130.3
	241.7	2673.34	132.1		252.0	2686.80	130.3
	242.0	2673.09	132.1		252.2	2625.33	130.3
	242.2	2672.65	132.1		252.5	2733.70	130.3
	242.5	2672.34	132.1		252.7	2741.90	130.3
	242.7	2672.19	132.1		253.0	2758.10	130.3
	243.0	2671.87	132.1		253.2	132.54	129.2
	243.2	2671.58	132.1		253.5	64.95	129.7
	243.5	2671.39	132.1		253.7	59.09	129.7
	243.7	2671.14	132.1		254.0	59.68	129.8
	244.0	2670.98	132.1		254.2	62.11	129.9
	244.2	2670.82	132.1		254.5	57.54	130.3
	244.5	2670.57	132.1		254.7	34.35	131.7
	244.7	2670.46	132.1		255.0	32.65	132.6
	245.0	2670.00	132.1		255.2	36.28	132.9
	245.2	2669.94	132.1		255.5	34.16	132.9
	245.5	2669.89	132.1		255.7	34.60	132.9
	245.7	2669.85	132.1		256.0	34.55	133.0
	246.0	2669.81	132.1		256.2	34.59	133.1
	246.2	2671.82	132.1		256.5	34.77	133.1
	246.5	2851.64	132.1		256.7	35.29	133.1
	246.7	2835.49	132.1		257.0	35.30	133.1
	247.0	2753.88	132.1		257.2	35.30	133.1
	247.2	2806.21	131.7		257.5	34.49	133.0
	247.5	2739.10	131.3		257.7	34.30	132.8
	247.7	2739.03	131.0		258.0	34.31	132.7
	248.0	2732.13	130.9		258.2	34.53	132.5
	248.2	2727.15	130.8		258.5	34.22	132.4
	248.5	2722.27	130.7		258.7	34.66	132.3
	248.7	2717.19	130.6		259.0	34.75	132.3
	249.0	2712.30	130.6		259.2	34.71	132.2
	249.2	2707.60	130.5		259.5	34.73	132.2
	249.5	2703.25	130.5		259.7	34.15	132.3
	249.7	2699.69	130.5		260.0	34.43	132.3
	250.0	2696.71	130.4		260.2	34.46	132.3
	250.2	2694.51	130.4		260.5	34.25	132.4
	250.5	2692.74	130.4		260.7	34.75	132.4

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	261.0	34.66	132.4		271.2	33.69	132.7
	261.2	35.28	132.5		271.5	33.72	132.7
	261.5	35.19	132.5		271.7	33.58	132.7
	261.7	34.82	132.5		272.0	33.54	132.7
	262.0	35.07	132.6		272.2	33.92	132.7
	262.2	34.94	132.6		272.5	33.62	132.7
	262.5	35.41	132.6		272.7	33.46	132.7
	262.7	35.61	132.6		273.0	33.38	132.8
	263.0	34.34	132.6		273.2	33.35	132.8
	263.2	34.56	132.6		273.5	33.95	132.8
	263.5	34.01	132.7		273.7	33.53	132.8
	263.7	34.38	132.7		274.0	34.10	132.8
	264.0	34.60	132.7		274.2	34.20	132.8
	264.2	34.61	132.6		274.5	34.16	132.8
	264.5	34.61	132.6		274.7	34.31	132.8
	264.7	34.67	132.6		275.0	33.55	132.8
	265.0	34.55	132.6		275.2	33.67	132.8
	265.2	34.40	132.6		275.5	33.84	132.8
	265.5	34.74	132.6		275.7	33.20	132.8
	265.7	34.39	132.6		276.0	33.87	132.8
	266.0	34.81	132.6		276.2	33.99	132.9
	266.2	34.78	132.6		276.5	33.63	132.9
	266.5	34.27	132.6		276.7	33.84	132.9
	266.7	34.26	132.6		277.0	34.77	132.9
	267.0	33.77	132.6		277.2	34.65	132.9
	267.2	33.97	132.5		277.5	34.95	132.9
	267.5	34.45	132.6		277.7	34.74	132.9
	267.7	34.46	132.6		278.0	35.24	132.9
	268.0	34.58	132.6		278.2	35.31	133.0
	268.2	34.69	132.6		278.5	35.30	133.0
	268.5	34.12	132.6		278.7	35.36	133.0
	268.7	34.27	132.6		279.0	35.33	133.0
	269.0	33.54	132.6		279.2	35.53	133.0
	269.2	33.63	132.7		279.5	34.95	133.0
	269.5	33.63	132.7		279.7	35.11	133.0
	269.7	33.44	132.7		280.0	34.90	133.1
	270.0	33.84	132.7		280.2	35.52	133.1
	270.2	33.89	132.7		280.5	35.75	133.1
	270.5	34.00	132.7		280.7	35.40	133.1
	270.7	34.22	132.7		281.0	35.31	133.1
	271.0	33.65	132.7		281.2	35.20	133.1

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	281.5	35.27	133.1		291.7	65.52	133.3
	281.7	35.26	133.1		292.0	66.30	133.3
	282.0	35.19	133.1		292.2	67.08	133.3
	282.2	35.36	133.1		292.5	67.82	133.3
	282.5	36.21	133.1		292.7	68.61	133.3
	282.7	35.32	133.1		293.0	69.40	133.3
	283.0	35.77	133.1		293.2	70.14	133.3
	283.2	35.70	133.1		293.5	71.02	133.3
	283.5	35.07	133.1		293.7	71.74	133.3
	283.7	36.00	133.1		294.0	72.49	133.3
	284.0	36.90	133.1		294.2	73.24	133.3
	284.2	38.03	133.2		294.5	73.99	133.3
	284.5	39.05	133.2		294.7	74.79	133.3
	284.7	40.48	133.2		295.0	75.55	133.3
	285.0	41.35	133.2		295.2	76.28	133.3
	285.2	42.47	133.2		295.5	77.00	133.3
	285.5	43.45	133.2		295.7	77.78	133.3
	285.7	44.46	133.2		296.0	78.46	133.3
	286.0	45.56	133.2		296.2	79.16	133.3
	286.2	46.27	133.2		296.5	79.93	133.3
	286.5	47.18	133.2		296.7	80.63	133.3
	286.7	48.19	133.2		297.0	81.38	133.3
	287.0	49.08	133.2		297.2	82.08	133.3
	287.2	50.10	133.2		297.5	82.89	133.3
	287.5	51.09	133.2		297.7	83.53	133.3
	287.7	51.99	133.2		298.0	84.32	133.3
	288.0	52.89	133.2		298.2	84.99	133.4
	288.2	53.78	133.2		298.5	85.72	133.4
	288.5	54.62	133.2		298.7	86.42	133.4
	288.7	55.49	133.2		299.0	87.10	133.4
	289.0	56.26	133.2		299.2	87.79	133.4
	289.2	57.12	133.2		299.5	88.53	133.4
	289.5	58.41	133.2		299.7	89.07	133.4
	289.7	59.21	133.2		300.0	89.83	133.4
	290.0	59.93	133.2		300.2	90.56	133.4
	290.2	60.70	133.2		300.5	91.28	133.4
	290.5	61.48	133.2		300.7	91.96	133.4
	290.7	62.23	133.2		301.0	92.60	133.4
	291.0	63.06	133.2		301.2	93.35	133.4
	291.2	63.80	133.2		301.5	94.04	133.4
	291.5	64.67	133.3		301.7	94.69	133.4

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	302.0	95.38	133.4		312.2	121.90	133.6
	302.2	96.04	133.4		312.5	122.62	133.6
	302.5	96.72	133.4		312.7	123.15	133.6
	302.7	97.45	133.4		313.0	123.80	133.6
	303.0	98.03	133.4		313.2	124.39	133.6
	303.2	98.68	133.4		313.5	125.15	133.6
	303.5	99.43	133.5		313.7	125.68	133.6
	303.7	100.09	133.5		314.0	126.34	133.6
	304.0	100.71	133.5		314.2	127.00	133.6
	304.2	101.41	133.5		314.5	127.56	133.7
	304.5	102.09	133.5		314.7	128.18	133.7
	304.7	102.72	133.5		315.0	128.76	133.7
	305.0	103.39	133.5		315.2	129.41	133.7
	305.2	104.03	133.5		315.5	130.00	133.7
	305.5	104.66	133.5		315.7	130.63	133.7
	305.7	105.36	133.5		316.0	131.22	133.7
	306.0	105.96	133.5		316.2	131.89	133.7
	306.2	106.66	133.5		316.5	132.43	133.7
	306.5	107.31	133.5		316.7	133.02	133.7
	306.7	107.95	133.5		317.0	133.72	133.7
	307.0	108.62	133.5		317.2	134.24	133.7
	307.2	109.20	133.5		317.5	134.95	133.7
	307.5	109.87	133.5		317.7	135.52	133.7
	307.7	110.54	133.5		318.0	136.40	133.7
	308.0	111.19	133.5		318.2	136.62	133.7
	308.2	111.77	133.5		318.5	137.36	133.7
	308.5	112.38	133.5		318.7	137.96	133.7
	308.7	113.13	133.5		319.0	138.50	133.7
	309.0	113.74	133.6		319.2	139.09	133.7
	309.2	114.48	133.6		319.5	139.79	133.7
	309.5	115.03	133.6		319.7	140.40	133.7
	309.7	115.60	133.6		320.0	141.04	133.8
	310.0	116.27	133.6		320.2	141.60	133.8
	310.2	116.91	133.6		320.5	142.20	133.8
	310.5	117.61	133.6		320.7	142.77	133.8
	310.7	118.11	133.6		321.0	143.36	133.8
	311.0	118.82	133.6		321.2	144.00	133.8
	311.2	119.41	133.6		321.5	144.74	133.8
	311.5	120.10	133.6		321.7	145.33	133.8
	311.7	120.77	133.6		322.0	145.84	133.8
	312.0	121.28	133.6		322.2	146.48	133.8

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	322.5	147.37	133.8		332.7	171.52	134.0
	322.7	147.60	133.8		333.0	172.16	134.0
	323.0	148.25	133.8		333.2	172.71	134.0
	323.2	148.79	133.8		333.5	173.22	134.0
	323.5	149.50	133.8		333.7	173.94	134.0
	323.7	150.13	133.8		334.0	174.46	134.0
	324.0	150.67	133.8		334.2	175.14	134.0
	324.2	151.23	133.8		334.5	175.70	134.0
	324.5	151.96	133.8		334.7	176.25	134.0
	324.7	152.49	133.8		335.0	176.83	134.0
	325.0	153.10	133.8		335.2	177.44	134.0
	325.2	153.65	133.8		335.5	178.09	134.0
	325.5	154.23	133.9		335.7	178.64	134.0
	325.7	154.81	133.9		336.0	179.27	134.0
	326.0	155.45	133.9		336.2	179.81	134.1
	326.2	156.00	133.9		336.5	180.43	134.1
	326.5	156.66	133.9		336.7	181.01	134.1
	326.7	157.25	133.9		337.0	181.67	134.1
	327.0	157.76	133.9		337.2	182.19	134.1
	327.2	158.42	133.9		337.5	182.85	134.1
	327.5	159.01	133.9		337.7	183.48	134.1
	327.7	159.69	133.9		338.0	184.00	134.1
	328.0	160.20	133.9		338.2	184.61	134.1
	328.2	160.80	133.9		338.5	185.26	134.1
	328.5	161.44	133.9		338.7	185.79	134.1
	328.7	161.99	133.9		339.0	186.31	134.1
	329.0	162.55	133.9		339.2	187.01	134.1
	329.2	163.19	133.9		339.5	187.59	134.1
	329.5	163.75	133.9		339.7	188.17	134.1
	329.7	164.36	133.9		340.0	188.85	134.1
	330.0	164.92	133.9		340.2	189.36	134.1
	330.2	165.55	133.9		340.5	189.95	134.1
	330.5	166.10	133.9		340.7	190.60	134.1
	330.7	166.82	134.0		341.0	191.14	134.1
	331.0	167.35	134.0		341.2	191.75	134.1
	331.2	167.94	134.0		341.5	192.36	134.2
	331.5	168.54	134.0		341.7	193.00	134.2
	331.7	169.08	134.0		342.0	193.86	134.2
	332.0	169.65	134.0		342.2	194.10	134.2
	332.2	170.37	134.0		342.5	194.76	134.2
	332.5	170.94	134.0		342.7	195.36	134.2

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	343.0	196.00	134.2		353.2	38.80	135.2
	343.2	196.54	134.2		353.5	38.55	135.2
	343.5	79.77	134.1		353.7	39.03	135.2
	343.7	37.84	134.3		354.0	39.20	135.2
	344.0	37.61	134.5		354.2	38.83	135.2
	344.2	35.66	134.7		354.5	39.02	135.2
	344.5	35.90	134.8		354.7	39.70	135.2
	344.7	37.42	134.9		355.0	38.97	135.2
	345.0	35.23	135.0		355.2	39.17	135.2
	345.2	35.01	135.1		355.5	39.83	135.2
	345.5	34.85	135.2		355.7	38.70	135.2
	345.7	36.41	135.2		356.0	38.76	135.2
	346.0	36.07	135.2		356.2	39.40	135.2
	346.2	35.98	135.2		356.5	39.62	135.2
	346.5	36.04	135.2		356.7	38.63	135.2
	346.7	34.68	135.2		357.0	39.42	135.3
	347.0	35.78	135.2		357.2	39.61	135.3
	347.2	36.68	135.2		357.5	38.72	135.3
	347.5	35.63	135.2		357.7	38.95	135.3
	347.7	36.59	135.2		358.0	39.52	135.3
	348.0	36.63	135.2		358.2	39.52	135.3
	348.2	36.54	135.2		358.5	38.92	135.3
	348.5	37.47	135.2		358.7	39.35	135.3
	348.7	37.67	135.2		359.0	39.55	135.3
	349.0	36.63	135.2		359.2	38.85	135.3
	349.2	37.37	135.2		359.5	39.03	135.3
	349.5	36.50	135.2		359.7	39.61	135.3
	349.7	36.54	135.2		360.0	38.89	135.3
	350.0	37.00	135.2		360.2	38.94	135.3
	350.2	36.95	135.2		360.5	39.50	135.3
	350.5	37.09	135.2		360.7	39.52	135.3
	350.7	37.59	135.2		361.0	38.69	135.3
	351.0	37.06	135.2		361.2	38.87	135.3
	351.2	37.27	135.2		361.5	39.45	135.3
	351.5	37.92	135.2		361.7	39.18	135.3
	351.7	37.84	135.2		362.0	39.01	135.3
	352.0	37.75	135.2		362.2	39.51	135.3
	352.2	38.12	135.2		362.5	40.42	135.3
	352.5	38.08	135.2		362.7	39.12	135.3
	352.7	38.21	135.2		363.0	39.55	135.3
	353.0	38.87	135.2		363.2	39.77	135.3

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	363.5	38.53	135.3		373.7	40.24	135.4
	363.7	38.71	135.3		374.0	38.87	135.4
	364.0	39.22	135.3		374.2	39.20	135.4
	364.2	39.37	135.3		374.5	39.48	135.4
	364.5	38.70	135.3		374.7	38.87	135.4
	364.7	38.91	135.3		375.0	38.75	135.4
	365.0	39.93	135.3		375.2	38.90	135.5
	365.2	38.50	135.3		375.5	39.90	135.5
	365.5	38.92	135.3		375.7	38.84	135.5
	365.7	39.12	135.3		376.0	39.08	135.5
	366.0	38.38	135.3		376.2	39.30	135.5
	366.2	38.54	135.3		376.5	40.00	135.5
	366.5	38.77	135.3		376.7	38.74	135.5
	366.7	39.75	135.3		377.0	38.91	135.5
	367.0	38.67	135.3		377.2	39.69	135.5
	367.2	38.78	135.4		377.5	39.91	135.5
	367.5	38.96	135.4		377.7	38.94	135.5
	367.7	39.75	135.4		378.0	39.09	135.5
	368.0	38.60	135.4		378.2	40.10	135.5
	368.2	38.84	135.4		378.5	38.73	135.5
	368.5	39.37	135.4		378.7	38.93	135.5
	368.7	39.46	135.4		379.0	39.84	135.5
	369.0	38.92	135.4		379.2	40.07	135.5
	369.2	39.14	135.4		379.5	38.58	135.5
	369.5	39.93	135.4		379.7	38.73	135.5
	369.7	38.58	135.4		380.0	39.73	135.5
	370.0	38.80	135.4		380.2	39.07	135.5
	370.2	39.46	135.4		380.5	39.26	135.5
	370.5	39.50	135.4		380.7	39.39	135.5
	370.7	38.81	135.4		381.0	40.08	135.5
	371.0	39.00	135.4		381.2	38.92	135.5
	371.2	39.79	135.4		381.5	39.11	135.5
	371.5	38.72	135.4		381.7	39.81	135.5
	371.7	38.89	135.4		382.0	40.62	135.5
	372.0	38.99	135.4		382.2	38.97	135.6
	372.2	39.01	135.4		382.5	39.17	135.6
	372.5	39.20	135.4		382.7	40.00	135.6
	372.7	39.62	135.4		383.0	38.82	135.6
	373.0	39.28	135.4		383.2	38.84	135.6
	373.2	39.19	135.4		383.5	39.49	135.6
	373.5	39.35	135.4		383.7	40.33	135.6

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	384.0	38.95	135.6		394.2	39.38	135.7
	384.2	39.14	135.6		394.5	40.59	135.7
	384.5	40.02	135.6		394.7	39.00	135.7
	384.7	38.53	135.6		395.0	39.13	135.8
	385.0	38.69	135.6		395.2	39.89	135.8
	385.2	39.43	135.6		395.5	39.92	135.8
	385.5	40.27	135.6		395.7	39.01	135.8
	385.7	38.90	135.6		396.0	39.16	135.8
	386.0	39.00	135.6		396.2	40.35	135.8
	386.2	39.47	135.6		396.5	39.18	135.8
	386.5	39.51	135.6		396.7	39.16	135.8
	386.7	39.45	135.6		397.0	39.72	135.8
	387.0	39.60	135.6		397.2	40.63	135.8
	387.2	40.57	135.6		397.5	39.27	135.8
	387.5	38.66	135.6		397.7	39.43	135.8
	387.7	38.80	135.6		398.0	40.54	135.8
	388.0	39.62	135.6		398.2	40.56	135.8
	388.2	39.57	135.6		398.5	39.21	135.8
	388.5	39.04	135.6		398.7	39.38	135.8
	388.7	39.21	135.7		399.0	40.45	135.8
	389.0	40.29	135.7		399.2	39.63	135.8
	389.2	38.95	135.7		399.5	39.73	135.8
	389.5	39.06	135.7		399.7	39.60	135.8
	389.7	39.89	135.7		400.0	40.15	135.8
	390.0	40.61	135.7		400.2	40.32	135.8
	390.2	39.27	135.7		400.5	39.02	135.8
	390.5	39.42	135.7		400.7	39.22	135.8
	390.7	40.01	135.7		401.0	40.28	135.9
	391.0	38.98	135.7		401.2	40.21	135.9
	391.2	38.97	135.7		401.5	39.44	135.9
	391.5	39.10	135.7		401.7	39.60	135.9
	391.7	40.46	135.7		402.0	40.86	135.9
	392.0	39.32	135.7		402.2	39.95	135.9
	392.2	39.41	135.7		402.5	39.54	135.9
	392.5	39.60	135.7		402.7	39.71	135.9
	392.7	40.28	135.7		403.0	40.61	135.9
	393.0	38.92	135.7		403.2	39.32	135.9
	393.2	39.06	135.7		403.5	39.51	135.9
	393.5	40.23	135.7		403.7	39.64	135.9
	393.7	39.27	135.7		404.0	40.75	135.9
	394.0	39.24	135.7		404.2	41.72	135.9

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	404.5	42.84	135.9		414.7	77.54	136.1
	404.7	43.82	135.9		415.0	78.22	136.1
	405.0	44.82	135.9		415.2	78.99	136.1
	405.2	45.85	135.9		415.5	79.83	136.1
	405.5	46.98	135.9		415.7	80.54	136.1
	405.7	47.86	135.9		416.0	81.29	136.1
	406.0	48.84	135.9		416.2	82.06	136.1
	406.2	49.77	135.9		416.5	82.86	136.1
	406.5	50.74	136.0		416.7	83.62	136.1
	406.7	51.63	136.0		417.0	84.40	136.2
	407.0	52.52	136.0		417.2	85.11	136.2
	407.2	53.44	136.0		417.5	85.83	136.2
	407.5	54.34	136.0		417.7	86.60	136.2
	407.7	55.29	136.0		418.0	87.42	136.2
	408.0	55.97	136.0		418.2	88.16	136.2
	408.2	56.91	136.0		418.5	88.83	136.2
	408.5	57.80	136.0		418.7	89.64	136.2
	408.7	58.51	136.0		419.0	90.34	136.2
	409.0	59.29	136.0		419.2	91.10	136.2
	409.2	60.26	136.0		419.5	91.85	136.2
	409.5	61.05	136.0		419.7	92.59	136.2
	409.7	61.92	136.0		420.0	93.35	136.2
	410.0	62.69	136.0		420.2	94.05	136.2
	410.2	63.49	136.0		420.5	94.82	136.2
	410.5	64.40	136.0		420.7	95.63	136.2
	410.7	65.20	136.0		421.0	96.36	136.2
	411.0	65.94	136.0		421.2	96.96	136.2
	411.2	66.76	136.0		421.5	97.76	136.2
	411.5	67.57	136.0		421.7	98.54	136.2
	411.7	68.35	136.1		422.0	99.25	136.2
	412.0	69.31	136.1		422.2	99.93	136.2
	412.2	69.87	136.1		422.5	100.73	136.2
	412.5	70.61	136.1		422.7	101.37	136.3
	412.7	71.22	136.1		423.0	102.13	136.3
	413.0	72.03	136.1		423.2	102.86	136.3
	413.2	72.82	136.1		423.5	103.61	136.3
	413.5	73.53	136.1		423.7	104.29	136.3
	413.7	74.38	136.1		424.0	105.03	136.3
	414.0	75.10	136.1		424.2	105.69	136.3
	414.2	75.89	136.1		424.5	106.46	136.3
	414.5	76.70	136.1		424.7	107.17	136.3

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	425.0	107.99	136.3		435.2	136.50	136.4
	425.2	108.57	136.3		435.5	137.54	136.5
	425.5	109.38	136.3		435.7	137.78	136.5
	425.7	110.08	136.3		436.0	138.62	136.5
	426.0	110.79	136.3		436.2	139.23	136.5
	426.2	111.45	136.3		436.5	139.97	136.5
	426.5	112.18	136.3		436.7	140.70	136.5
	426.7	112.96	136.3		437.0	141.32	136.5
	427.0	113.69	136.3		437.2	142.02	136.5
	427.2	114.22	136.3		437.5	142.64	136.5
	427.5	115.03	136.3		437.7	143.33	136.5
	427.7	115.78	136.3		438.0	144.01	136.5
	428.0	116.51	136.3		438.2	144.70	136.5
	428.2	117.12	136.3		438.5	145.43	136.5
	428.5	117.77	136.3		438.7	146.12	136.5
	428.7	118.57	136.4		439.0	146.70	136.5
	429.0	119.22	136.4		439.2	147.44	136.5
	429.2	120.00	136.4		439.5	148.18	136.5
	429.5	120.61	136.4		439.7	148.74	136.5
	429.7	121.33	136.4		440.0	149.48	136.5
	430.0	122.09	136.4		440.2	150.08	136.5
	430.2	122.78	136.4		440.5	150.82	136.5
	430.5	123.45	136.4		440.7	151.51	136.5
	430.7	124.08	136.4		441.0	152.19	136.5
	431.0	124.90	136.4		441.2	152.86	136.5
	431.2	125.54	136.4		441.5	153.54	136.5
	431.5	126.20	136.4		441.7	154.17	136.5
	431.7	126.92	136.4		442.0	154.82	136.5
	432.0	127.61	136.4		442.2	155.55	136.6
	432.2	128.30	136.4		442.5	156.23	136.6
	432.5	129.03	136.4		442.7	156.86	136.6
	432.7	129.74	136.4		443.0	157.51	136.6
	433.0	130.38	136.4		443.2	158.25	136.6
	433.2	131.04	136.4		443.5	158.90	136.6
	433.5	131.77	136.4		443.7	159.56	136.6
	433.7	132.44	136.4		444.0	160.29	136.6
	434.0	133.10	136.4		444.2	160.91	136.6
	434.2	133.83	136.4		444.5	161.55	136.6
	434.5	134.49	136.4		444.7	162.24	136.6
	434.7	135.22	136.4		445.0	162.84	136.6
	435.0	135.83	136.4		445.2	163.50	136.6

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	445.5	164.15	136.6		455.7	191.30	136.7
	445.7	164.89	136.6		456.0	191.82	136.7
	446.0	165.60	136.6		456.2	192.46	136.7
	446.2	166.17	136.6		456.5	193.14	136.7
	446.5	166.85	136.6		456.7	193.84	136.8
	446.7	167.53	136.6		457.0	194.52	136.8
	447.0	168.22	136.6		457.2	195.16	136.8
	447.2	168.82	136.6		457.5	195.79	136.8
	447.5	169.53	136.6		457.7	196.42	136.8
	447.7	170.18	136.6		458.0	197.10	136.8
	448.0	170.87	136.6		458.2	197.75	136.8
	448.2	171.48	136.6		458.5	198.34	136.8
	448.5	172.24	136.6		458.7	199.01	136.8
	448.7	172.79	136.6		459.0	199.72	136.8
	449.0	173.60	136.6		459.2	200.29	136.8
	449.2	174.12	136.7		459.5	201.02	136.8
	449.5	174.88	136.7		459.7	201.63	136.8
	449.7	175.45	136.7		460.0	202.24	136.8
	450.0	176.09	136.7		460.2	202.97	136.8
	450.2	176.86	136.7		460.5	203.56	136.8
	450.5	177.40	136.7		460.7	204.17	136.8
	450.7	178.08	136.7		461.0	204.80	136.8
	451.0	178.80	136.7		461.2	205.37	136.8
	451.2	179.39	136.7		461.5	206.21	136.8
	451.5	180.16	136.7		461.7	206.81	136.8
	451.7	180.84	136.7		462.0	207.48	136.8
	452.0	181.38	136.7		462.2	208.03	136.8
	452.2	182.03	136.7		462.5	208.69	136.8
	452.5	182.71	136.7		462.7	209.34	136.8
	452.7	183.37	136.7		463.0	209.98	136.8
	453.0	184.11	136.7		463.2	210.63	136.8
	453.2	184.75	136.7		463.5	211.25	136.8
	453.5	185.33	136.7		463.7	211.93	136.8
	453.7	186.02	136.7		464.0	212.52	136.9
	454.0	186.70	136.7		464.2	213.10	136.9
	454.2	187.24	136.7		464.5	213.76	136.9
	454.5	187.93	136.7		464.7	214.50	136.9
	454.7	188.60	136.7		465.0	215.05	136.9
	455.0	189.34	136.7		465.2	215.69	136.9
	455.2	189.87	136.7		465.5	216.43	136.9
	455.5	190.56	136.7		465.7	217.10	136.9

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	466.0	217.72	136.9		476.2	243.93	137.0
	466.2	218.30	136.9		476.5	244.51	137.0
	466.5	218.98	136.9		476.7	245.10	137.0
	466.7	219.63	136.9		477.0	245.73	137.0
	467.0	220.15	136.9		477.2	246.39	137.0
	467.2	220.90	136.9		477.5	246.99	137.0
	467.5	221.52	136.9		477.7	247.64	137.0
	467.7	222.17	136.9		478.0	248.31	137.0
	468.0	222.80	136.9		478.2	248.94	137.0
	468.2	223.50	136.9		478.5	249.53	137.0
	468.5	224.02	136.9		478.7	250.25	137.0
	468.7	224.73	136.9		479.0	250.80	137.0
	469.0	225.44	136.9		479.2	251.49	137.1
	469.2	226.05	136.9		479.5	252.07	137.1
	469.5	226.68	136.9		479.7	252.75	137.1
	469.7	227.28	136.9		480.0	253.34	137.1
	470.0	227.91	136.9		480.2	254.03	137.1
	470.2	228.57	136.9		480.5	254.59	137.1
	470.5	229.22	136.9		480.7	255.18	137.1
	470.7	229.86	136.9		481.0	255.94	137.1
	471.0	230.78	136.9		481.2	256.48	137.1
	471.2	231.02	136.9		481.5	257.10	137.1
	471.5	231.78	137.0		481.7	257.77	137.1
	471.7	232.42	137.0		482.0	258.39	137.1
	472.0	233.05	137.0		482.2	259.08	137.1
	472.2	233.70	137.0		482.5	259.62	137.1
	472.5	234.31	137.0		482.7	260.28	137.1
	472.7	234.98	137.0		483.0	260.87	137.1
	473.0	235.62	137.0		483.2	261.55	137.1
	473.2	236.26	137.0		483.5	262.14	137.1
	473.5	236.86	137.0		483.7	262.87	137.1
	473.7	237.51	137.0		484.0	263.38	137.1
	474.0	238.17	137.0		484.2	264.05	137.1
	474.2	238.73	137.0		484.5	264.68	137.1
	474.5	239.43	137.0		484.7	265.34	137.1
	474.7	240.09	137.0		485.0	265.99	137.1
	475.0	240.63	137.0		485.2	266.53	137.1
	475.2	241.36	137.0		485.5	267.18	137.1
	475.5	241.96	137.0		485.7	267.77	137.1
	475.7	242.61	137.0		486.0	268.44	137.1
	476.0	243.18	137.0		486.2	269.03	137.1

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	486.5	269.64	137.1		496.7	295.15	137.3
	486.7	270.31	137.2		497.0	295.79	137.3
	487.0	270.98	137.2		497.2	296.39	137.3
	487.2	271.59	137.2		497.5	296.98	137.3
	487.5	272.24	137.2		497.7	297.66	137.3
	487.7	272.85	137.2		498.0	298.21	137.3
	488.0	273.48	137.2		498.2	298.88	137.3
	488.2	274.05	137.2		498.5	299.46	137.3
	488.5	274.77	137.2		498.7	300.10	137.3
	488.7	275.30	137.2		499.0	300.75	137.3
	489.0	275.97	137.2		499.2	301.62	137.3
	489.2	276.52	137.2		499.5	301.86	137.3
	489.5	277.22	137.2		499.7	302.53	137.3
	489.7	277.81	137.2		500.0	303.13	137.3
	490.0	278.43	137.2		500.2	303.68	137.3
	490.2	279.05	137.2		500.5	304.31	137.3
	490.5	279.74	137.2		500.7	304.93	137.3
	490.7	280.36	137.2		501.0	305.55	137.3
	491.0	280.93	137.2		501.2	306.16	137.3
	491.2	281.61	137.2		501.5	306.78	137.3
	491.5	282.23	137.2		501.7	307.44	137.3
	491.7	282.74	137.2		502.0	307.99	137.4
	492.0	283.37	137.2		502.2	308.62	137.4
	492.2	284.01	137.2		502.5	309.22	137.4
	492.5	284.69	137.2		502.7	309.83	137.4
	492.7	285.26	137.2		503.0	310.38	137.4
	493.0	285.86	137.2		503.2	310.94	137.4
	493.2	286.54	137.2		503.5	311.65	137.4
	493.5	287.12	137.2		503.7	312.26	137.4
	493.7	287.84	137.2		504.0	312.81	137.4
	494.0	288.37	137.2		504.2	313.48	137.4
	494.2	289.00	137.3		504.5	314.08	137.4
	494.5	289.64	137.3		504.7	314.70	137.4
	494.7	290.24	137.3		505.0	315.24	137.4
	495.0	290.82	137.3		505.2	315.85	137.4
	495.2	291.74	137.3		505.5	316.50	137.4
	495.5	291.97	137.3		505.7	317.06	137.4
	495.7	292.72	137.3		506.0	317.71	137.4
	496.0	293.30	137.3		506.2	318.35	137.4
	496.2	293.96	137.3		506.5	318.93	137.4
	496.5	294.59	137.3		506.7	319.51	137.4

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	507.0	320.43	137.4		517.2	344.72	137.6
	507.2	320.67	137.4		517.5	345.42	137.6
	507.5	321.30	137.4		517.7	346.22	137.6
	507.7	321.90	137.4		518.0	346.46	137.6
	508.0	322.48	137.4		518.2	347.16	137.6
	508.2	323.13	137.4		518.5	347.73	137.6
	508.5	323.80	137.4		518.7	348.32	137.6
	508.7	324.31	137.4		519.0	348.98	137.6
	509.0	324.85	137.4		519.2	349.86	137.6
	509.2	325.58	137.4		519.5	350.11	137.6
	509.5	326.11	137.5		519.7	350.75	137.6
	509.7	326.78	137.5		520.0	351.31	137.6
	510.0	327.34	137.5		520.2	351.84	137.6
	510.2	328.02	137.5		520.5	352.54	137.6
	510.5	328.64	137.5		520.7	353.04	137.6
	510.7	329.19	137.5		521.0	353.64	137.6
	511.0	329.74	137.5		521.2	354.26	137.6
	511.2	330.45	137.5		521.5	354.82	137.6
	511.5	331.07	137.5		521.7	355.48	137.6
	511.7	331.60	137.5		522.0	356.03	137.6
	512.0	332.23	137.5		522.2	356.96	137.6
	512.2	332.80	137.5		522.5	357.19	137.6
	512.5	333.42	137.5		522.7	357.85	137.6
	512.7	333.98	137.5		523.0	358.44	137.6
	513.0	334.56	137.5		523.2	358.98	137.6
	513.2	335.28	137.5		523.5	359.54	137.6
	513.5	335.82	137.5		523.7	360.16	137.6
	513.7	336.39	137.5		524.0	360.80	137.6
	514.0	336.98	137.5		524.2	361.33	137.6
	514.2	337.65	137.5		524.5	361.95	137.7
	514.5	338.26	137.5		524.7	2555.81	138.8
	514.7	338.81	137.5		525.0	2647.71	139.8
	515.0	339.40	137.5		525.2	2659.51	140.4
	515.2	339.97	137.5		525.5	2658.56	140.6
	515.5	340.60	137.5		525.7	2655.84	140.7
	515.7	341.19	137.5		526.0	2653.12	140.8
	516.0	341.81	137.5		526.2	2651.01	140.8
	516.2	342.35	137.5		526.5	2676.84	140.9
	516.5	342.96	137.5		526.7	2513.87	141.0
	516.7	343.54	137.5		527.0	2516.79	139.5
	517.0	344.11	137.6		527.2	2756.79	138.5

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	527.5	2722.20	138.0		537.7	2688.81	136.6
	527.7	2713.61	137.8		538.0	2681.74	136.5
	528.0	2706.75	137.6		538.2	2677.68	136.5
	528.2	2700.66	137.5		538.5	2674.11	136.5
	528.5	2695.15	137.5		538.7	2670.43	136.5
	528.7	2689.93	137.4		539.0	2666.90	136.5
	529.0	2685.00	137.4		539.2	2525.67	136.4
	529.2	2680.11	137.4		539.5	2415.01	136.4
	529.5	2675.19	137.4		539.7	2656.63	136.0
	529.7	2670.56	137.4		540.0	2652.88	135.7
	530.0	2666.38	137.4		540.2	2649.48	135.6
	530.2	2662.66	137.3		540.5	2646.31	135.6
	530.5	2659.25	137.3		540.7	2643.34	135.5
	530.7	2656.09	137.3		541.0	2640.47	135.5
	531.0	2653.02	137.3		541.2	2637.34	135.5
	531.2	2650.16	137.3		541.5	2699.99	135.5
	531.5	2647.46	137.3		541.7	2691.40	135.6
	531.7	2644.91	137.3		542.0	2686.52	135.6
	532.0	2642.45	137.4		542.2	2682.26	135.6
	532.2	2640.22	137.4		542.5	2678.02	135.6
	532.5	2638.15	137.4		542.7	2673.51	135.6
	532.7	2636.22	137.4		543.0	2668.76	135.6
	533.0	2634.52	137.4		543.2	2378.13	135.6
	533.2	2633.11	137.4		543.5	2521.14	135.5
	533.5	2631.94	137.4		543.7	2650.49	134.7
	533.7	2631.74	137.4		544.0	2633.59	134.4
	534.0	2631.81	137.4		544.2	2627.54	134.3
	534.2	2631.88	137.4		544.5	2624.88	134.3
	534.5	2631.88	137.4		544.7	2622.30	134.2
	534.7	2631.77	137.4		545.0	2617.75	134.2
	535.0	2631.68	137.4		545.2	2460.25	134.2
	535.2	2631.99	137.4		545.5	2384.79	134.0
	535.5	2631.88	137.4		545.7	2350.73	133.8
	535.7	2631.49	137.4		546.0	2604.63	133.5
	536.0	2631.40	137.5		546.2	2550.18	132.9
	536.2	2631.33	137.5		546.5	2563.38	132.5
	536.5	2631.23	137.5		546.7	2562.09	132.4
	536.7	2532.00	137.4		547.0	2560.09	132.3
	537.0	2512.60	137.6		547.2	2490.45	132.2
	537.2	2484.97	137.5		547.5	2379.76	132.1
	537.5	2694.94	136.9		547.7	2357.81	131.9

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	548.0	2337.69	131.5		558.2	2103.85	124.6
	548.2	2567.34	131.2		558.5	2291.29	124.3
	548.5	2560.49	131.1		558.7	2288.81	124.2
	548.7	2558.06	131.0		559.0	2285.89	124.1
	549.0	2555.48	131.0		559.2	2282.53	124.1
	549.2	2320.22	130.9		559.5	2328.39	124.0
	549.5	2332.47	130.9		559.7	2293.19	123.8
	549.7	2307.63	130.7		560.0	2288.99	123.7
	550.0	2528.20	130.4		560.2	2285.07	123.6
	550.2	2517.26	130.2		560.5	2281.15	123.6
	550.5	2514.71	130.1		560.7	2277.04	123.6
	550.7	2510.74	130.1		561.0	2272.91	123.6
	551.0	2308.15	130.0		561.2	2268.90	123.6
	551.2	2287.39	129.7		561.5	2265.04	123.6
	551.5	2251.75	129.3		561.7	2261.36	123.6
	551.7	2472.93	128.9		562.0	2258.18	123.6
	552.0	2469.44	128.7		562.2	2255.59	123.6
	552.2	2466.24	128.7		562.5	2253.25	123.6
	552.5	2319.17	128.6		562.7	2075.10	123.5
	552.7	2268.08	128.6		563.0	2052.37	123.5
	553.0	2236.61	128.4		563.2	2241.93	123.5
	553.2	2470.47	128.0		563.5	2250.07	123.4
	553.5	2435.82	127.6		563.7	2244.08	123.4
	553.7	2426.21	127.4		564.0	2240.21	123.4
	554.0	2423.66	127.2		564.2	2083.42	123.4
	554.2	2420.59	127.2		564.5	2049.69	123.3
	554.5	2225.45	127.1		564.7	2063.25	123.0
	554.7	2205.96	126.9		565.0	2239.15	122.7
	555.0	2260.31	126.5		565.2	2199.24	122.2
	555.2	2396.70	126.1		565.5	2195.75	122.0
	555.5	2382.04	126.1		565.7	2191.95	121.9
	555.7	2379.15	126.1		566.0	2011.86	121.8
	556.0	2198.99	126.0		566.2	2001.11	121.5
	556.2	2168.02	126.0		566.5	1978.85	121.2
	556.5	2145.50	125.8		566.7	2167.29	120.9
	556.7	2352.36	125.5		567.0	2153.17	120.6
	557.0	2336.65	125.2		567.2	2148.93	120.5
	557.2	2333.37	125.2		567.5	2030.45	120.3
	557.5	2330.08	125.1		567.7	1979.14	120.1
	557.7	2131.77	125.0		568.0	1945.12	119.8
	558.0	2131.11	124.8		568.2	2157.57	119.5

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	568.5	2106.21	119.0		578.7	1834.61	113.3
	568.7	2102.34	118.8		579.0	1830.48	113.2
	569.0	2098.52	118.7		579.2	1760.66	113.1
	569.2	1940.67	118.6		579.5	1671.77	112.9
	569.5	1918.92	118.5		579.7	1638.18	112.7
	569.7	1894.70	118.3		580.0	1838.67	112.5
	570.0	2066.18	118.1		580.2	1787.62	112.1
	570.2	2060.76	118.0		580.5	1783.02	112.0
	570.5	2057.35	118.0		580.7	1778.50	111.9
	570.7	1875.33	117.9		581.0	1712.28	111.8
	571.0	1875.22	117.8		581.2	1790.25	111.7
	571.2	1851.66	117.7		581.5	1785.57	111.6
	571.5	2027.37	117.5		581.7	1780.91	111.6
	571.7	2017.20	117.3		582.0	1790.53	111.5
	572.0	2013.33	117.3		582.2	1725.68	111.5
	572.2	1843.43	117.2		582.5	1626.74	111.5
	572.5	1833.86	117.1		582.7	1601.88	111.6
	572.7	1813.11	116.9		583.0	1835.94	111.6
	573.0	1987.05	116.5		583.2	1742.37	111.3
	573.2	1972.87	116.3		583.5	1737.93	111.2
	573.5	1968.82	116.3		583.7	1734.97	111.2
	573.7	1965.26	116.2		584.0	1656.80	111.1
	574.0	1802.87	116.2		584.2	1585.07	111.0
	574.2	1789.89	116.1		584.5	1557.02	110.9
	574.5	1761.30	115.9		584.7	1733.85	110.7
	574.7	1936.92	115.5		585.0	1696.50	110.3
	575.0	1924.72	115.2		585.2	1692.08	110.2
	575.2	1920.54	115.1		585.5	1687.39	110.1
	575.5	1916.40	115.1		585.7	1618.92	110.0
	575.7	1912.38	115.0		586.0	1539.77	109.9
	576.0	1909.83	115.0		586.2	1530.21	109.8
	576.2	1769.48	114.9		586.5	1505.75	109.5
	576.5	1736.16	114.9		586.7	1653.05	109.3
	576.7	1726.24	114.9		587.0	1647.42	109.2
	577.0	1896.77	114.5		587.2	1643.92	109.1
	577.2	1879.65	114.1		587.5	1536.99	109.0
	577.5	1876.13	114.0		587.7	1495.52	108.9
	577.7	1744.93	113.9		588.0	1476.45	108.6
	578.0	1710.75	113.9		588.2	1605.81	108.2
	578.2	1678.42	113.8		588.5	1600.91	107.9
	578.5	1853.67	113.6		588.7	1598.41	107.8

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	589.0	1468.82	107.7		599.2	1205.19	102.1
	589.2	1457.69	107.6		599.5	1184.99	102.0
	589.5	1431.70	107.3		599.7	1297.99	101.8
	589.7	1561.09	107.1		600.0	1279.14	101.4
	590.0	1555.00	107.0		600.2	1275.69	101.2
	590.2	1550.63	106.9		600.5	1271.08	101.2
	590.5	1438.11	106.8		600.7	1182.17	101.1
	590.7	1412.87	106.7		601.0	1160.69	101.0
	591.0	1394.17	106.4		601.2	1141.44	100.9
	591.2	1506.81	106.2		601.5	1240.31	100.6
	591.5	1509.73	106.0		601.7	1231.58	100.4
	591.7	1505.53	106.0		602.0	1229.07	100.3
	592.0	1426.40	105.9		602.2	1225.33	100.3
	592.2	1384.50	105.8		602.5	1221.44	100.2
	592.5	1355.65	105.7		602.7	1217.99	100.2
	592.7	1489.79	105.5		603.0	1215.43	100.2
	593.0	1464.84	105.3		603.2	1213.67	100.2
	593.2	1461.32	105.3		603.5	1212.71	100.2
	593.5	1457.15	105.2		603.7	1128.69	100.1
	593.7	1349.49	105.2		604.0	1113.49	100.1
	594.0	1324.63	105.0		604.2	1096.50	100.1
	594.2	1296.65	104.6		604.5	1191.22	99.8
	594.5	1423.97	104.3		604.7	1184.62	99.5
	594.7	1417.09	104.3		605.0	1182.02	99.4
	595.0	1413.20	104.2		605.2	1088.56	99.3
	595.2	1409.11	104.2		605.5	1082.17	99.3
	595.5	1405.00	104.2		605.7	1061.81	99.1
	595.7	1288.69	104.1		606.0	1151.83	98.8
	596.0	1279.03	104.0		606.2	1140.22	98.6
	596.2	1254.82	103.8		606.5	1136.61	98.5
	596.5	1377.80	103.4		606.7	1133.06	98.5
	596.7	1371.48	103.2		607.0	1059.85	98.4
	597.0	1367.60	103.1		607.2	1040.07	98.4
	597.2	1364.03	103.1		607.5	1014.70	98.3
	597.5	1292.37	103.0		607.7	1095.07	98.0
	597.7	1239.86	102.9		608.0	1092.17	97.9
	598.0	1212.52	102.8		608.2	1090.58	97.8
	598.2	1357.23	102.6		608.5	1008.57	97.8
	598.5	1324.94	102.3		608.7	997.89	97.7
	598.7	1321.86	102.2		609.0	972.92	97.6
	599.0	1317.62	102.2		609.2	1050.64	97.4

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	609.5	1046.62	97.2		619.7	719.15	92.0
	609.7	1045.57	97.0		620.0	698.51	92.0
	610.0	1010.46	97.0		620.2	739.74	92.1
	610.2	961.56	96.8		620.5	732.01	92.0
	610.5	932.74	96.7		620.7	730.51	92.0
	610.7	1013.76	96.7		621.0	728.77	91.9
	611.0	1003.26	96.5		621.2	679.18	91.8
	611.2	1001.74	96.4		621.5	662.67	91.7
	611.5	999.06	96.3		621.7	696.75	91.5
	611.7	928.67	96.2		622.0	688.02	91.4
	612.0	907.59	96.2		622.2	687.43	91.3
	612.2	891.33	96.1		622.5	648.86	91.3
	612.5	962.09	95.8		622.7	635.00	91.2
	612.7	957.40	95.6		623.0	617.34	91.1
	613.0	955.81	95.5		623.2	643.45	90.9
	613.2	886.59	95.4		623.5	642.06	90.7
	613.5	869.60	95.3		623.7	640.59	90.6
	613.7	854.21	95.3		624.0	639.30	90.6
	614.0	915.20	95.1		624.2	595.37	90.6
	614.2	911.93	94.9		624.5	580.97	90.5
	614.5	909.53	94.8		624.7	563.45	90.4
	614.7	841.19	94.7		625.0	597.61	90.2
	615.0	829.61	94.6		625.2	596.51	90.2
	615.2	815.05	94.5		625.5	595.86	90.1
	615.5	868.99	94.3		625.7	554.31	90.1
	615.7	866.57	94.1		626.0	540.65	90.1
	616.0	864.36	94.0		626.2	521.85	90.1
	616.2	805.78	93.9		626.5	552.27	90.0
	616.5	793.31	93.8		626.7	552.19	90.0
	616.7	774.84	93.6		627.0	550.90	90.0
	617.0	823.02	93.2		627.2	528.66	89.9
	617.2	821.08	93.0		627.5	506.13	89.9
	617.5	820.85	92.9		627.7	485.73	89.8
	617.7	819.31	92.9		628.0	506.35	89.8
	618.0	765.57	92.8		628.2	507.46	89.7
	618.2	748.55	92.8		628.5	506.31	89.7
	618.5	788.38	92.5		628.7	506.15	89.7
	618.7	777.36	92.3		629.0	505.90	89.7
	619.0	775.63	92.2		629.2	504.74	89.7
	619.2	775.65	92.1		629.5	462.12	89.7
	619.5	746.82	92.1		629.7	445.67	89.7

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	630.0	467.04	89.7		640.2	158.43	90.8
	630.2	462.23	89.7		640.5	136.75	90.9
	630.5	462.09	89.6		640.7	144.47	91.1
	630.7	425.46	89.6		641.0	144.29	91.2
	631.0	417.15	89.6		641.2	144.23	91.2
	631.2	397.67	89.6		641.5	144.32	91.2
	631.5	416.52	89.6		641.7	144.88	91.3
	631.7	416.27	89.5		642.0	144.80	91.3
	632.0	416.09	89.5		642.2	144.44	91.3
	632.2	392.81	89.5		642.5	143.90	91.3
	632.5	370.78	89.5		642.7	143.79	91.3
	632.7	347.76	89.5		643.0	144.97	91.3
	633.0	370.62	89.6		643.2	144.03	91.3
	633.2	370.63	89.6		643.5	143.77	91.3
	633.5	370.10	89.6		643.7	143.56	91.4
	633.7	345.80	89.6		644.0	143.40	91.4
	634.0	322.81	89.6		644.2	143.27	91.4
	634.2	306.40	89.6		644.5	143.22	91.4
	634.5	324.62	89.7		644.7	143.18	91.4
	634.7	325.08	89.8		645.0	143.15	91.4
	635.0	324.98	89.8		645.2	143.11	91.4
	635.2	300.57	89.8		645.5	143.06	91.4
	635.5	282.54	89.8		645.7	138.33	91.4
	635.7	264.89	89.9		646.0	164.14	91.4
	636.0	279.81	90.0		646.2	142.66	91.4
	636.2	280.33	90.0		646.5	144.06	91.4
	636.5	279.97	90.1		646.7	143.99	91.4
	636.7	279.73	90.1		647.0	115.42	91.4
	637.0	246.99	90.1		647.2	91.82	91.4
	637.2	231.23	90.1		647.5	80.15	91.4
	637.5	218.49	90.2		647.7	99.16	91.4
	637.7	235.01	90.3		648.0	99.96	91.5
	638.0	234.73	90.3		648.2	99.93	91.5
	638.2	234.56	90.3		648.5	100.23	91.5
	638.5	208.23	90.3		648.7	99.83	91.5
	638.7	187.78	90.3		649.0	99.65	91.5
	639.0	175.22	90.5		649.2	99.55	91.5
	639.2	188.78	90.6		649.5	99.52	91.5
	639.5	188.86	90.7		649.7	99.55	91.5
	639.7	188.84	90.8		650.0	99.55	91.5
	640.0	175.18	90.8		650.2	99.55	91.5

Printing every 1 samples

Serial # 8321	Inside			Serial # 8321	Inside		
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	650.5	99.59	91.6		660.7	9.33	94.4
	650.7	99.69	91.6		661.0	9.32	94.4
	651.0	99.72	91.6		661.2	9.27	94.4
	651.2	87.93	91.6		661.5	9.25	94.4
	651.5	74.40	91.6		661.7	9.20	94.4
	651.7	55.51	91.7		662.0	9.20	94.4
	652.0	47.19	92.1		662.2	9.18	94.4
	652.2	57.00	92.4		662.5	9.18	94.5
	652.5	57.02	92.5		662.7	9.16	94.5
	652.7	56.91	92.6		663.0	9.14	94.5
	653.0	56.98	92.7		663.2	9.13	94.5
	653.2	57.12	92.7		663.5	9.13	94.5
	653.5	56.76	92.8		663.7	9.12	94.5
	653.7	57.19	92.8		664.0	9.10	94.5
	654.0	57.11	92.8		664.2	9.10	94.5
	654.2	57.45	92.8		664.5	9.09	94.5
	654.5	57.02	92.8		664.7	9.08	94.5
	654.7	56.98	92.9		665.0	9.07	94.5
	655.0	56.98	92.9		665.2	9.07	94.5
	655.2	56.93	92.9		665.5	9.07	94.5
	655.5	56.87	92.9		665.7	9.07	94.5
	655.7	56.85	92.9		666.0	9.07	94.5
	656.0	56.85	92.9		666.2	9.06	94.5
	656.2	56.87	92.9		666.5	9.06	94.5
	656.5	56.91	92.9		666.7	9.05	94.5
	656.7	56.22	92.9		667.0	9.05	94.5
	657.0	50.97	92.9		667.2	9.04	94.5
	657.2	33.53	92.9		667.5	9.04	94.5
	657.5	9.40	92.9		667.7	9.05	94.5
	657.7	6.30	93.5		668.0	9.05	94.5
	658.0	10.99	93.8		668.2	9.05	94.5
	658.2	11.94	94.0		668.5	9.04	94.5
	658.5	11.91	94.1		668.7	9.03	94.5
	658.7	11.86	94.2		669.0	9.02	94.5
	659.0	11.77	94.2		669.2	9.01	94.5
	659.2	11.71	94.2		669.5	8.99	94.5
	659.5	11.67	94.2		669.7	9.01	94.5
	659.7	11.64	94.3		670.0	9.02	94.5
	660.0	11.66	94.3		670.2	12.30	94.5
	660.2	11.60	94.3		670.5	12.83	94.6
	660.5	9.38	94.3		670.7	12.77	94.6

Printing every 1 samples

Serial # 8321 Inside				Serial # 8321 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	671.0	12.76	94.6		681.2	10.32	94.4
	671.2	12.80	94.6		681.5	10.33	94.4
	671.5	12.81	94.6		681.7	7.65	94.4
	671.7	12.80	94.7		682.0	7.80	94.4
	672.0	12.79	94.7		682.2	7.76	94.3
	672.2	12.76	94.7		682.5	7.72	94.3
	672.5	12.74	94.7		682.7	7.68	94.3
	672.7	12.72	94.7		683.0	6.75	94.3
	673.0	12.74	94.7		683.2	4.82	94.3
	673.2	12.73	94.7		683.5	4.78	94.6
	673.5	12.73	94.7		683.7	4.75	94.7
	673.7	12.73	94.7		684.0	4.73	94.8
	674.0	12.73	94.7		684.2	4.72	94.8
	674.2	12.73	94.7		684.5	6.28	94.8
	674.5	12.73	94.7		684.7	7.34	94.9
	674.7	12.74	94.7		685.0	7.67	94.9
	675.0	12.75	94.7		685.2	7.80	94.9
	675.2	12.76	94.7		685.5	7.94	94.9
	675.5	12.76	94.7		685.7	6.55	94.8
	675.7	12.73	94.7		686.0	5.15	94.9
	676.0	12.72	94.7		686.2	5.29	95.1
	676.2	12.70	94.7		686.5	5.72	95.2
	676.5	12.69	94.7		686.7	6.19	95.3
	676.7	8.80	94.7		687.0	6.31	95.3
	677.0	10.13	94.6		687.2	4.74	95.4
	677.2	10.14	94.5		687.5	3.63	95.4
	677.5	10.15	94.5		687.7	3.61	95.4
	677.7	10.18	94.5		688.0	2.39	95.4
	678.0	10.19	94.5		688.2	2.41	95.5
	678.2	10.17	94.4		688.5	2.43	95.6
	678.5	10.16	94.4		688.7	-0.03	95.7
	678.7	10.21	94.4		689.0	-0.06	96.1
	679.0	10.24	94.4		689.2	-0.24	96.4
	679.2	10.25	94.4		689.5	-0.31	96.6
	679.5	10.26	94.4		689.7	-0.29	95.9
	679.7	10.28	94.4		690.0	-0.31	95.5
	680.0	10.30	94.4		690.2	-0.45	95.1
	680.2	10.33	94.4		690.5	-0.59	94.7
	680.5	10.37	94.4		690.7	-0.32	94.4
	680.7	10.34	94.4		691.0	-0.23	94.0
	681.0	10.35	94.4		691.2	-0.25	93.4


Printing every 1 samples

Serial # 8321	Inside			Serial # 8321	Inside		
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	691.5	-0.62	91.7		701.7	-0.19	84.3
	691.7	-0.58	87.6		702.0	-0.19	84.4
	692.0	-1.06	84.5		702.2	-0.19	84.4
	692.2	-0.99	83.9		702.5	-0.19	84.5
	692.5	-0.94	83.9		702.7	-0.19	84.5
	692.7	-0.78	84.0		703.0	-0.17	84.5
	693.0	-0.75	84.1		703.2	-0.16	84.6
	693.2	-0.69	84.2		703.5	-0.16	84.6
	693.5	-0.28	84.3		703.7	-0.16	84.6
	693.7	-0.25	84.3		704.0	-0.15	84.6
	694.0	-0.23	84.4		704.2	-0.16	84.7
	694.2	-0.22	84.4		704.5	-0.27	83.7
	694.5	-0.22	84.4		704.7	-0.27	83.6
	694.7	-0.21	84.4		705.0	-0.17	83.7
	695.0	-0.20	84.5		705.2	-0.20	83.9
	695.2	-0.20	84.5		705.5	-0.16	84.1
	695.5	-0.19	84.6		705.7	-0.11	84.3
	695.7	-0.18	84.6		706.0	-0.05	84.7
	696.0	-0.17	84.6		706.2	-0.11	85.0
	696.2	-0.16	84.7		706.5	-0.14	85.3
	696.5	-0.15	84.7		706.7	-0.15	85.6
	696.7	-0.14	84.7		707.0	-0.08	86.0
	697.0	-0.14	84.7		707.2	-0.25	86.3
	697.2	-0.14	84.6		707.5	-0.19	86.7
	697.5	-0.14	84.5				
	697.7	-0.14	84.3				
	698.0	-0.13	84.2				
	698.2	-0.14	84.1				
	698.5	-0.15	84.0				
	698.7	-0.15	84.0				
	699.0	-0.15	84.0				
	699.2	-0.16	84.0				
	699.5	-0.17	84.0				
	699.7	-0.17	84.0				
	700.0	-0.18	84.0				
	700.2	-0.18	84.1				
	700.5	-0.18	84.1				
	700.7	-0.18	84.2				
	701.0	-0.18	84.2				
	701.2	-0.18	84.2				
	701.5	-0.19	84.3				

Printing every 1 samples


Horner Plot

Horner Pressure

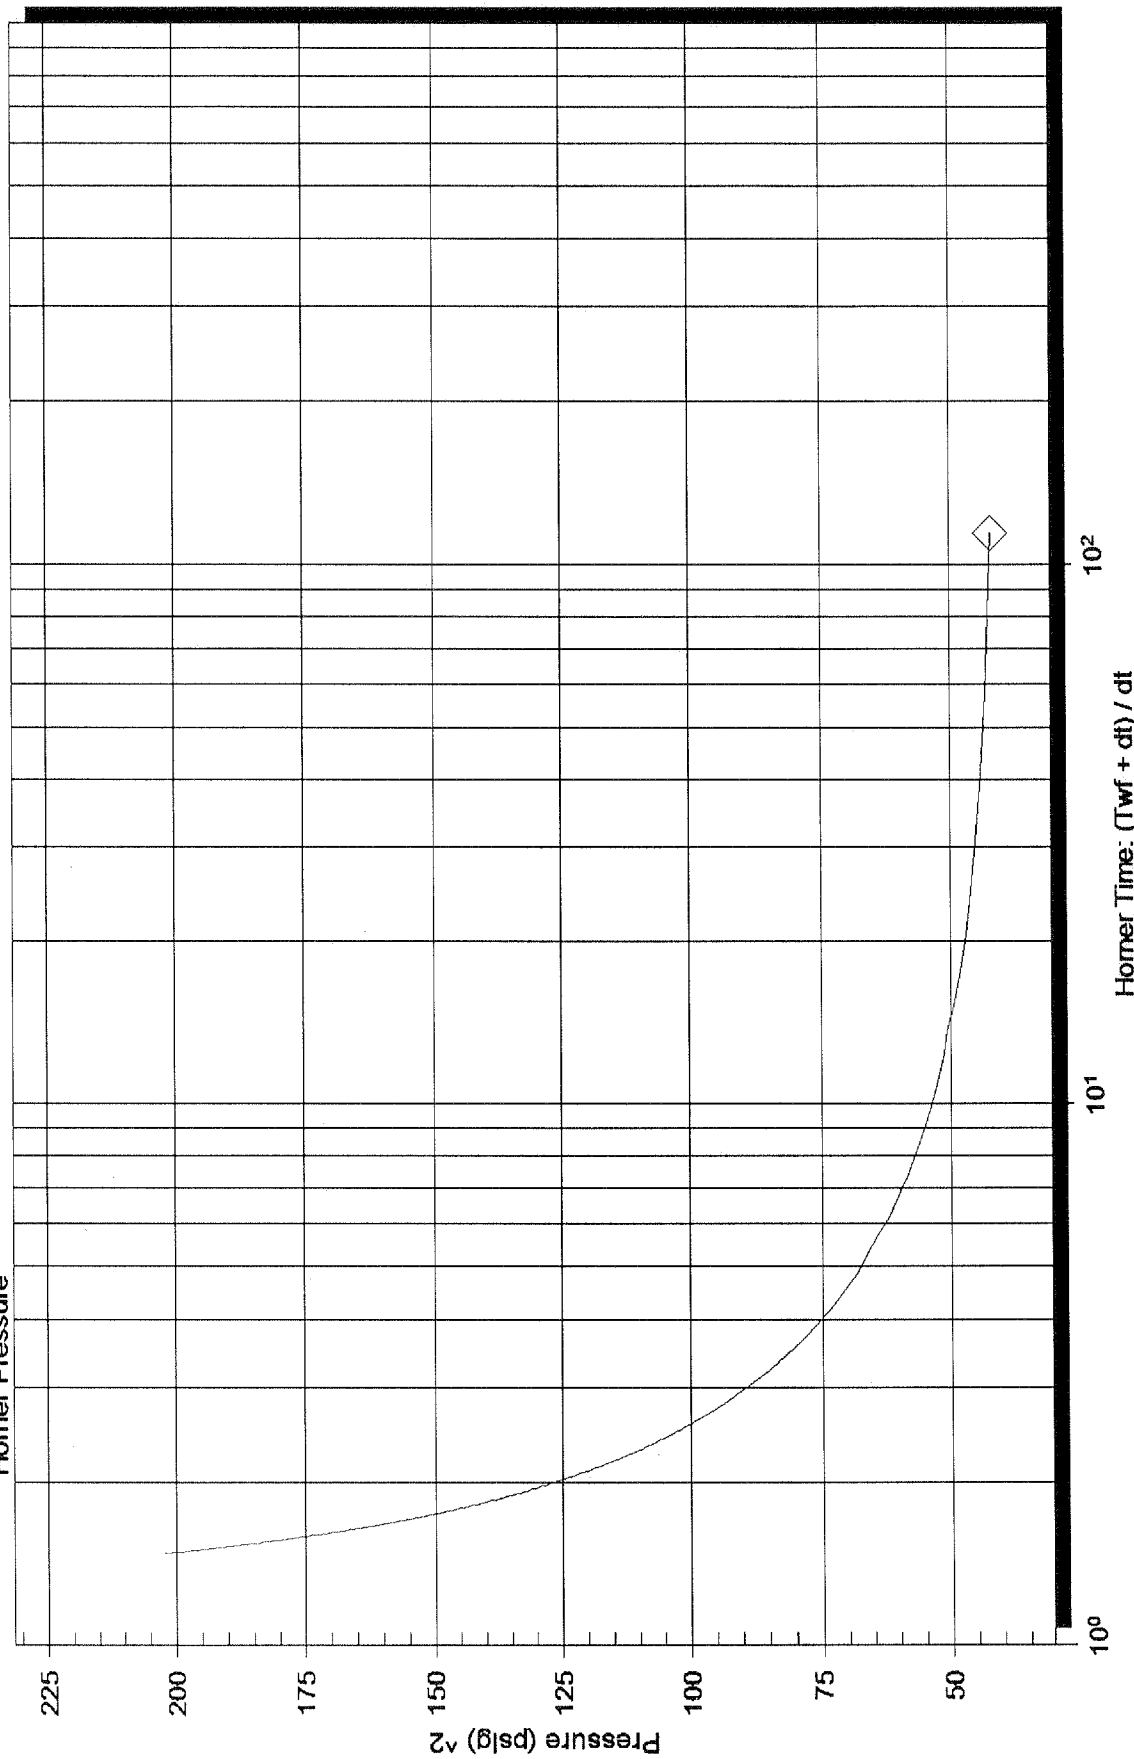

Horner Plot

Horner Pressure

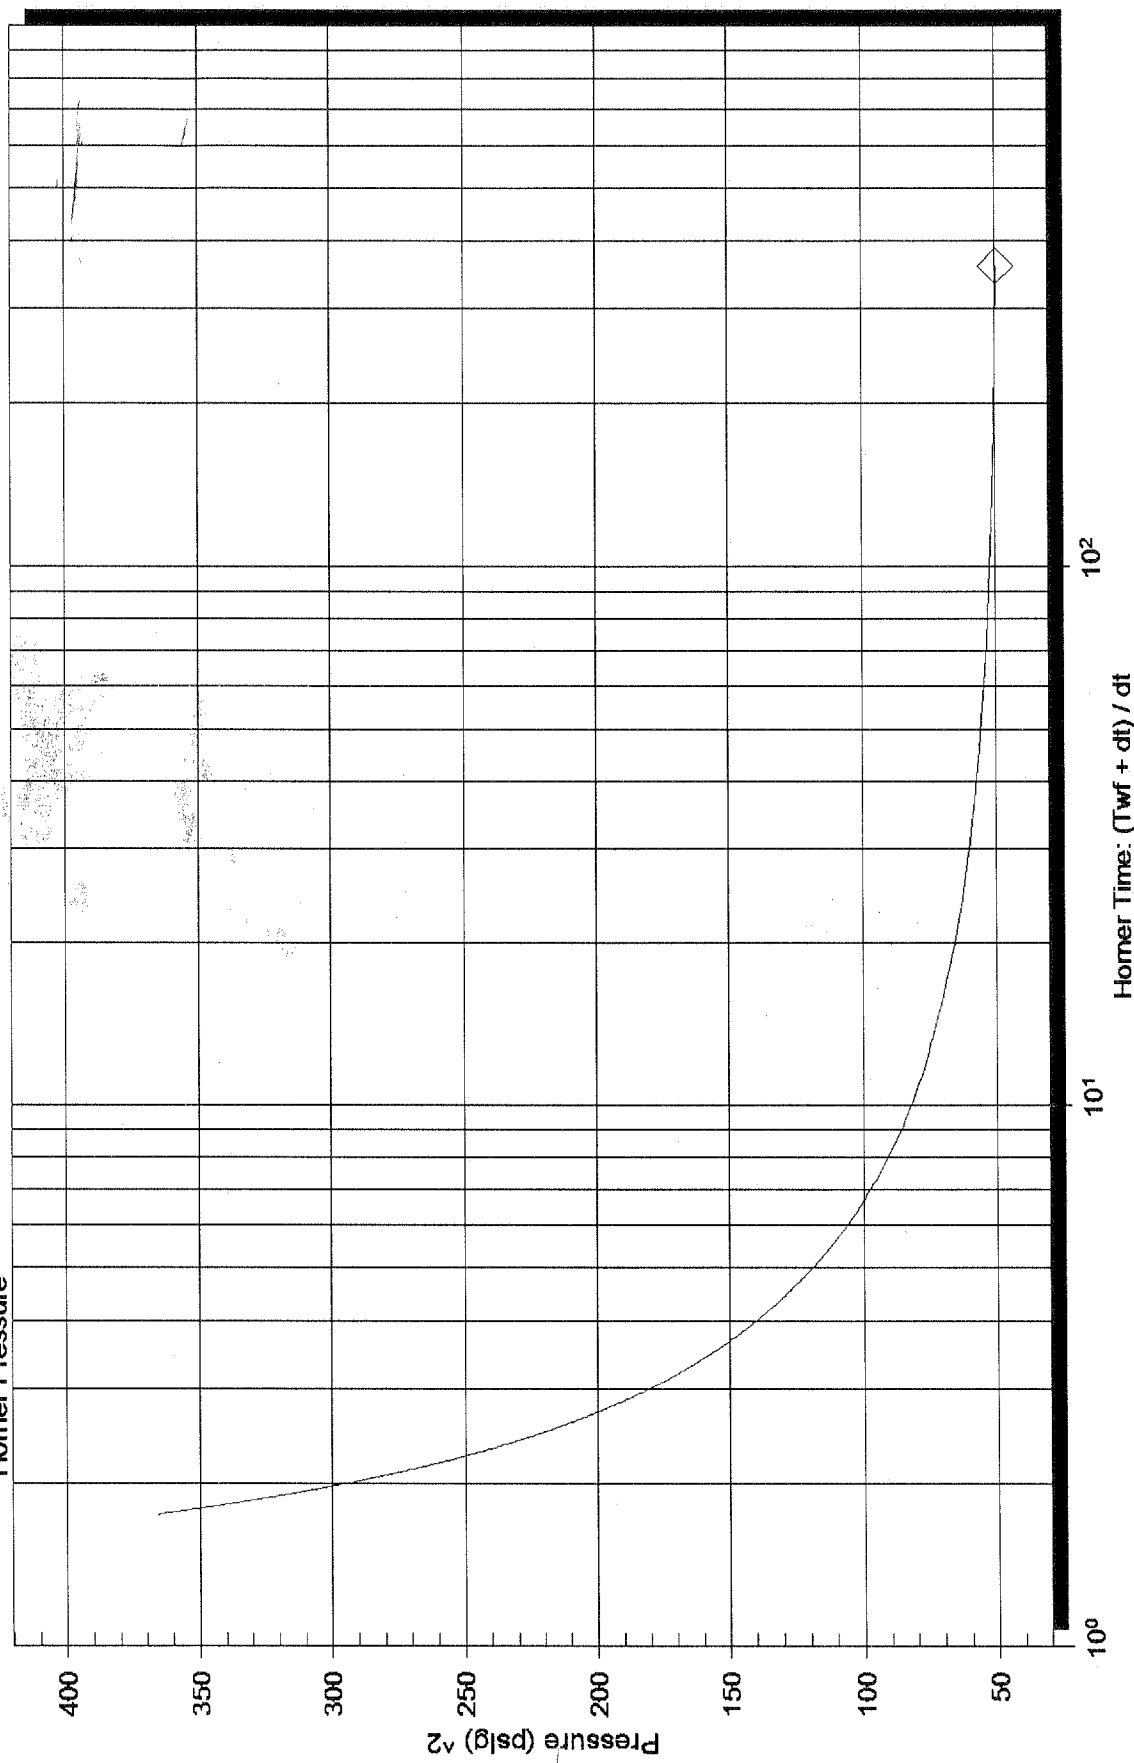

Serial Number: 6752 (Inside)

P* :

Slope (m) : kpa/log cycle

Flow Cycle: 2

234432