

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

ORIGINAL

Form ACO-1
September 1999
Form Must Be Typed

WELL COMPLETION FORM
WELL HISTORY - DESCRIPTION OF WELL & LEASE

Operator: License # 33019
Name: Rosewood Resources, Inc.
Address: 2711 N. Haskell Ave., Suite 2800, LB 22
City/State/Zip: Dallas, TX 75201
Purchaser: _____
Operator Contact Person: Tom Roelfs
Phone: (970) 324-1686
Contractor: Name: Advanced Drilling Technologies LLC
License: 33532
Wellsite Geologist: Steven VonFeldt

Designate Type of Completion:
 New Well Re-Entry Workover
 Oil SWD SLOW Temp. Abd.
 Gas ENHR SIGW
 Dry Other (Core, WSW, Expl., Cathodic, etc)

If Workover/Re-entry: Old Well Info as follows:

Operator: _____
Well Name: _____

Original Comp. Date: _____ Original Total Depth: _____
 Deepening Re-perf. Conv. to Enhr./SWD
 Plug Back Plug Back Total Depth
 Commingled Docket No. _____
 Dual Completion Docket No. _____
 Other (SWD or Enhr.?) Docket No. _____

3/28/2006	3/29/2006	3/29/2006
Spud Date or Recompletion Date	Date Reached TD	Completion Date or Recompletion Date

API No. 15 - 023-20666-0000

County: Cheyenne
~~SW~~ ~~NE~~ ~~SE~~ ~~NW~~ NE Sec. 33 Twp. 2 S. R. 42 East West
456 feet from S / (N) (circle one) Line of Section
2183 feet from (E) / W (circle one) Line of Section

Footages Calculated from Nearest Outside Section Corner:
(circle one) (NE) SE NW SW
Lease Name: Heim Well #: 31-33

Field Name: Cherry Creek
Producing Formation: Niobrara

Elevation: Ground: 3740' Kelly Bushing: 3752'
Total Depth: 1800' Plug Back Total Depth: 1799'

Amount of Surface Pipe Set and Cemented at 351' csg @ 364 Feet
Multiple Stage Cementing Collar Used? Yes No
If yes, show depth set _____ Feet
If Alternate II completion, cement circulated from _____
feet depth to _____ w/ _____ sx cmt.


Drilling Fluid Management Plan
(Data must be collected from the Reserve Pit)
Chloride content 5000 ppm Fluid volume 220 bbls
Dewatering method used Evaporation

Location of fluid disposal if hauled offsite:
Operator Name: ALT I with 2-26-06
Lease Name: _____ License No.: _____
Quarter _____ Sec. _____ Twp. _____ S. R. _____ East West
County: _____ Docket No.: _____

INSTRUCTIONS: An original and two copies of this form shall be filed with the Kansas Corporation Commission, 130 S. Market - Room 2078, Wichita, Kansas 67202, within 120 days of the spud date, recompletion, workover or conversion of a well. Rule 82-3-130, 82-3-106 and 82-3-107 apply. Information of side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form (see rule 82-3-107 for confidentiality in excess of 12 months). One copy of all wireline logs and geologist well report shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature: Tom W Roelfs
Title: Production Foreman Date: 7-1-06
Subscribed and sworn to before me this 1st day of July
06
Notary Public: James S. Jensen
Date Commission Exp. 2/26/08



KCC Office Use ONLY

Letter of Confidentiality Received
If Denied, Yes Date: _____
 Wireline Log Received
 Geologist Report Received
 UIC Distribution

RECEIVED
JUL 05 2006
KCC WICHITA



Operator Name: Rosewood Resources, Inc. Lease Name: Heim Well #: 31-33
 Sec. 33 Twp. 2 S. R. 42 East West County: Cheyenne

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all final copies of drill stems tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface test, along with final chart(s). Attach extra sheet if more space is needed. Attach copy of all Electric Wireline Logs surveyed. Attach final geological well site report.

Drill Stem Tests Taken <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <i>(Attach Additional Sheets)</i> Samples Sent to Geological Survey <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Cores Taken <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Electric Log Run <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <i>(Submit Copy)</i> List All E. Logs Run: Platform Express Resistivity, Porosity, Density ML-GR	<input checked="" type="checkbox"/> Log Formation (Top), Depth and Datum <input type="checkbox"/> Sample Name Top Datum Niobrara 1614' KB
--	--

CASING RECORD <input checked="" type="checkbox"/> New <input type="checkbox"/> Used							
Report all strings set-conductor, surface, intermediate, production, etc.							
Purpose of String	Size Hole Drilled	Size Casing Set (In O.D.)	Weight Lbs. / Ft.	Setting Depth	Type of Cement	# Sacks Used	Type and Percent Additives
Surface	9 1/2 "	7"	17#	364'	Neat	90	
Production	6 1/4"	4 1/2"	10.5#	1799.86'	Neat	65	2% Cal.


ADDITIONAL CEMENTING / SQUEEZE RECORD				
Purpose:	Depth Top Bottom	Type of Cement	#Sacks Used	Type and Percent Additives
<input type="checkbox"/> Perforate <input type="checkbox"/> Protect Casing <input type="checkbox"/> Plug Back TD <input type="checkbox"/> Plug Off Zone				

Shots Per Foot	PERFORATION RECORD - Bridge Plugs Set/Type Specify Footage of Each Interval Perforated	Acid, Fracture, Shot, Cement Squeeze Record (Amount and Kind of Material Used)	Depth
2	1616' to 1648'	Frac w/49,713 gals MavFoam 30q & 100,020# 16/30	
		Brady Sand & 330,000 scf N2	

TUBING RECORD		Size	Set At	Packer At	Liner Run
none					<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Date of First, Resumerd Production, SWD or Enhr. 4/24/2006		Producing Method			
		<input checked="" type="checkbox"/> Flowing <input type="checkbox"/> Pumping <input type="checkbox"/> Gas Lift <input type="checkbox"/> Other (Explain)			
Estimated Production Per 24 Hours	Oil Bbls.	Gas Mcf	Water Bbls.	Gas-Oil Ratio	Gravity
	none	40			

Disposition of Gas		METHOD OF COMPLETION		Production Interval	
<input type="checkbox"/> Vented	<input checked="" type="checkbox"/> Sold	<input type="checkbox"/> Open Hole	<input checked="" type="checkbox"/> Perf.	<input type="checkbox"/> Dually Comp.	<input type="checkbox"/> Commingled
<i>(If vented, Submit ACO-18.)</i>		<input type="checkbox"/> Other (Specify)			

RECEIVED
 JUL 05 2006
 KCC WICHITA

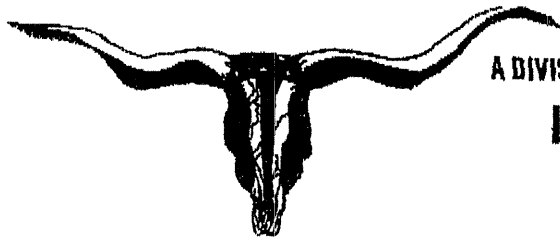

A DIVISION OF ADVANCED DRILLING TECHNOLOGIES, LLC.

LONGHORN CEMENTING CO.

P.O. BOX 203 YUMA, COLORADO 80759
Phone: 970-848-0799 Fax: 970-848-0798

FIELD SERVICE TICKET
AND INVOICE

DATE 3-29-06 TICKET NO. 0529

DATE OF JOB	DISTRICT	NEW WELL <input checked="" type="checkbox"/>	OLD WELL <input type="checkbox"/>	PROD <input type="checkbox"/>	INJ <input type="checkbox"/>	WDW <input type="checkbox"/>	CUSTOMER ORDER NO.:
CUSTOMER <u>Rosewood</u>		LEASE <u>Heim 31-33</u>					WELL NO.
ADDRESS		COUNTY					STATE
CITY	STATE	SERVICE CREW <u>M.E.K.R.</u>					
AUTHORIZED BY		EQUIPMENT <u>UNIT #111</u>					
TYPE JOB: <u>Long string</u>	DEPTH FT.	CEMENT DATA: BULK <input type="checkbox"/>	SAND DATA: SACKS <input type="checkbox"/>				TRUCK CALLED
SIZE HOLE:	DEPTH FT.	SACKS	BRAND	TYPE	% GEL	ADMIXES	ARRIVED AT JOB
SIZE & WT. CASTING <u>4 1/2</u>	DEPTH FT.	<u>15</u>		<u>1-11</u>			START OPERATION
SIZE & WT. D PIPE OR TUBING	DEPTH FT.						FINISH OPERATION
TOP PLUGS	TYPE	WEIGHT OF SLURRY:	LBS. / GAL.	LBS. / GAL.			RELEASED
		VOLUME OF SLURRY					MILES FROM STATION TO WELL
		<u>15</u> SACKS CEMENT TREATED WITH <u>2</u> % OF <u>KCC</u>					
MAX DEPTH <u>1174</u>	FT.	MAX PRESSURE					

CONTRACT CONDITIONS: (This contract must be signed before the job is commenced or merchandise is delivered).

The undersigned is authorized to execute this contract as an agent of the customer. As such, the undersigned agrees and acknowledges that this contract for services, materials, products, and/or supplies includes all of and only these terms and conditions appearing on the front and back of this document. No additional or substitute terms and/or conditions shall become a part of this contract without written consent or an officer of Advanced Drilling Technologies, LLC.

SIGNED: _____
(WELL OWNER, OPERATOR, CONTRACTOR OR AGENT)

ITEM / PRICE REF. NUMBER	MATERIAL, EQUIPMENT AND SERVICES USED	UNIT	QUANTITY	UNIT PRICE	\$ AMOUNT
001-2	Depthchase - Cement - Mileage Asper Contract				4000.00
300-2	4 1/2 Accusal Floats	1			267.00
300-4	4 1/2 Latchdown Buffer Plug	1			226.00
200-6	4 1/2 Centralizer	7			250.88
300-8	4 1/2 Scrubbers	10			348.00
300-11	7" Centralizer	7			36.44
400-2	CLAYSTA	2.5 gal			118.12
400-4	KCC	100 lb			265.58
					5273.09
	MUD Loss 10.2				
	Cement 17.6				
	Displacement 28.8				
	Bump Plug @ 1800				
RECEIVED					
JUL 05 2006					
KCC WICHITA					
SUB TOTAL					
ACID DATA:		SERVICE & EQUIPMENT		%TAX ON \$	
GALLONS	%	MATERIALS		%TAX ON \$	
HCL					
HCL					
TOTAL					

SERVICE REPRESENTATIVE _____ THE ABOVE MATERIAL AND SERVICE ORDERED BY CUSTOMER AND RECEIVED BY: Don Dromme
(WELL OWNER, OPERATOR, CONTRACTOR OR AGENT)

SCHAAL DRILLING, CO.
PO BOX 416
BURLINGTON, CO. 80807
719-346-8032
FIELD REPORT
SURFACE CASING, DRILLING AND CEMENTING

DRILLING DATE 3-28-06

WELL NAME & LEASE # Heim 31-33

MOVE IN, RIG UP, DIG PITS ETC. DATE 3-28-06 TIME 5:30 AM PM

SPUD TIME 8:45 AM PM SHALE DEPTH 275 TIME 11:15 AM PM

HOLE DIA. 9 1/2 FROM 0 TO 353 TD TIME 12:30 AM PM

CIRCULATE, T.O.O.H., SET 350.80 FT CASING 363.80 KB FT DEPTH

9 JOINTS 7 OD #/FT 14 15.5 17 20 23

PUMP 90 SAC CEMENT 560 GAL.DISP. CIRC. 4 BBL TO PIT

PLUG DOWN TIME 2:30 AM PM DATE 3-28-06

CEMENT LEFT IN CSG. 50 FT TYPE: PORTLAND CEMENT I/II ASTM C 150
CENTRALIZER 1 CEMENT COST \$ 1203.91

ELEVATION 3740
+12KB 3752

PIPE TALLY

- 1. 39.40
 - 2. 39.40
 - 3. 39.40
 - 4. 39.40
 - 5. 39.40
 - 6. 39.40
 - 7. 39.40
 - 8. 39.40
 - 9. 35.60
 - 10.
 - 11.
 - 12.
 - 13.
- TOTAL 350.80

RECEIVED
JUL 05 2006
KCC WICHITA