


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

15-051-05516-0000  
WELL PLUGGING RECORD

NORTH

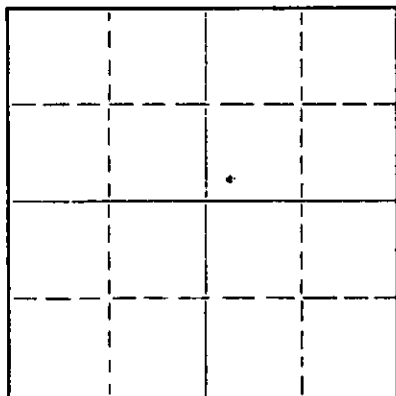

Locate well correctly on above  
Section Plat

Ellis County. Sec. 35 Twp. 11S Rge. 17 (E) 19 (W)  
Location as "NE/CNW/SW" or footage from lines SW-SW-Ne  
Lease Owner J. F. Darby Oil Company  
Lease Name Vine Well No. A - 5  
Office Address 403 Philtower Bldg. Tulsa 3, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed November 19 57  
Application for plugging filed September 19 61  
Application for plugging approved September 19 61  
Plugging commenced September 27 19 61  
Plugging completed September 27 19 61  
Reason for abandonment of well or producing formation Depleted Production  
If a producing well is abandoned, date of last production August 19 61  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation Arbuckle Depth to top 358 Bottom \_\_\_\_\_ Total Depth of Well 3703 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Arbuckle</u>				<u>8 5/8</u>	<u>171</u>	<u>None</u>
				<u>5 1/2</u>	<u>358</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

5 1/2 Cemented in, circulated with cement 1 1/2 to 0', pumped hole full of heavy mud (35 sacks jel mud) pumped plug followed by 70 sacks cement, 500 lb. pressure to 300 lb pressured

RECEIVED  
SEP 29 1961  
9-28-61  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Globe Cementing Company  
Address Plainville, Kansas

STATE OF Kansas COUNTY OF Rooks, ss.  
W. V. Kent (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W V Kent  
(Address) \_\_\_\_\_

SUBSCRIBED AND SWORN TO before me this 27th day of September, 19 61

My commission expires March 18, 1962  
Notary Public.

J.F. DARBY OIL COMPANY  
VINE A - 5  
Sec. 35-118-19W  
Ellis County- Solomon Pool

15-051-05516-0000

0 to 400' Shale & sand  
400 to 695' Shale & shells  
695' to 860' Sand  
860' to 1015' Red Shale & Shells  
1015' to 1439' Shale & Shells  
1439' to 1476' Anhydrite  
1476' to 2405' Shale & Shells  
2405' to 3151' Lime & Shale  
3151' to 3703' Lime & Total depth.

Anhydrite 1439'  
Topeka Lime 3108'  
Heebner Shale 3335'  
Toronto Lime 3354'  
Lansing 3376'  
Bas Kansas City 3590'  
Conglomerate Cherty 3620'  
Simpson 3638'  
Arbuckle 3657'  
Drilled to 3703' total depth.

Agent

W. V. Keut

SEP 27 1951  
CONSERVATION DIVISION  
Wichita, Kansas