

15-155-00263-0000

WELL RECORD

County Reno State Kansas Section 22 Twp 24S Rge 9W
 Company Operating Fain Drilling Company
 Office Address Oklahoma City, Oklahoma
 Farm Name George Blucher Well No. 1
 Drilling Started July 17, 1942 Drilling Finished August 28, 1942
 Date of First Production Dry hole Completed
 Well Located 330' east of west line and 330' north of south line of SW SW NE
 Elevation: Derrick Floor Ground
 Character of Well Dry hole

OIL OR GAS SANDS OR ZONES

Name	From	To	Name	From	To
Name	From	To	Name	From	To

WATER SANDS


Name	From	To	Name	From	To
Name	From	To	Name	From	To

CASING RECORD

Size	Weight	Thds.	Make	Amount Set	Amount Pulled	Packer	Record
				Ft.	In.	Set	Make
10-3/4"	40#	8		258			

CEMENTING AND MUDDING


Size	Sacks	Chemical	Method of	Mudding	Results
	Cement	Gal. Make	Cementing	Method	
10-3/4"	150		Halliburton		

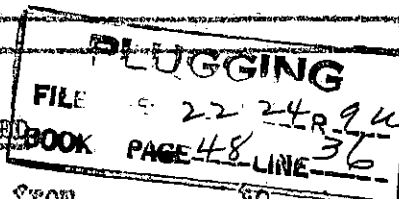

Rotary Tools were used from 0 to 4210 and from 60
 Cable Tools were used from to and from 60

private
 CONTRACTOR

FAIN DRILLING COMPANY

By *Er. King*

FORMATION RECORDTop Bottom

Surface sand	0	194
Sand and red bed	194	393
Red bed and shale	393	728
Shale	728	960
Lime and shale	960	1668
Lime	1668	1733
Lime and shale	1733	1757
Lime	1757	1819
Lime and shale	1819	1884
Lime	1884	1951
Lime and shale	1951	2099
Lime	2099	2161
Lime and shale	2161	2417
Lime	2417	2515
Lime and shale	2515	2718
Lime	2718	2937
Lime and shale	2937	3040
Lime	3040	3078
Lime and shale	3078	3158
Lime	3158	3193
Lime and shale	3193	3246
Shale	3246	3272
Lime	3272	3640
Shale	3640	3667
Lime and shale	3667	3674
Shale and lime	3674	3716
Sticky lime	3716	3728
Shale	3728	3753
Lime	3753	3768
Chert and lime	3768	3823
Lime	3823	3864
Shale	3864	3930
Sticky shale	3930	3952
Lime and shale	3952	3964
Shale	3964	4023
Viola lime	4023	4050
Lime	4050	4078
Chert	4078	4080
Sand and shale	4080	4119
Lime and shale	4119	4146
Sand and shale	4146	4166
Lime	4166	4210 T.D.