



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company TETON ENERGY CORP.
Well LACEY #3-20
Field HOISINGTON SOUTHEAST
County BARTON
State KANSAS

Company TETON ENERGY CORPORATION
Well LACEY #3-20
Field HOISINGTON SOUTHEAST
County BARTON State KANSAS

Location: API # : 15-009-25213-0000
545' FSL & 555' FWL
SEC 20 TWP 17S RGE 13W
Permanent Datum GROUND LEVEL Elevation 1911
Log Measured From KELLY BUSHING 9' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CDL/CNL/PE
DIL/SONIC
Elevation
K.B. 1920
D.F. 1918
G.L. 1911

Date	6/5/08		
Run Number	TWO		
Depth Driller	3560		
Depth Logger	3558		
Bottom Logged Interval	3535		
Top Log Interval	1500		
Casing Driller	8 5/8"@940'		
Casing Logger	937		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,000 PPM	
Density / Viscosity	9.2/58		
pH / Fluid Loss	11.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.40@84F		
Rmf @ Meas. Temp	1.05@84F		
Rmc @ Meas. Temp	1.68@84F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	1.05@112F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	112F		
Equipment Number	0836		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BRUCE ARD		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785)628-6395
DIRECTIONS
(HWY 4 & 281 JUNCTION) GO E. ON HWY 4 TO CURVE, JOG N. THEN E. TO NEXT COUNTY RD. 1N.,
1/4E. N. INTO






SUPERIOR
Hays,
Kansas


MAIN SECTION


Database File: 001595pe.db
Dataset Pathname: pass6.6
Presentation Format: micro
Dataset Creation: Fri Jun 06 04:13:23 2008
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
-100	SP (mV)	100	10 (ft3)	0	MEL2.0 (Ohm-m)	20
6	CALIPER (in)	16	TBHV			
			0 (ft3)	10		

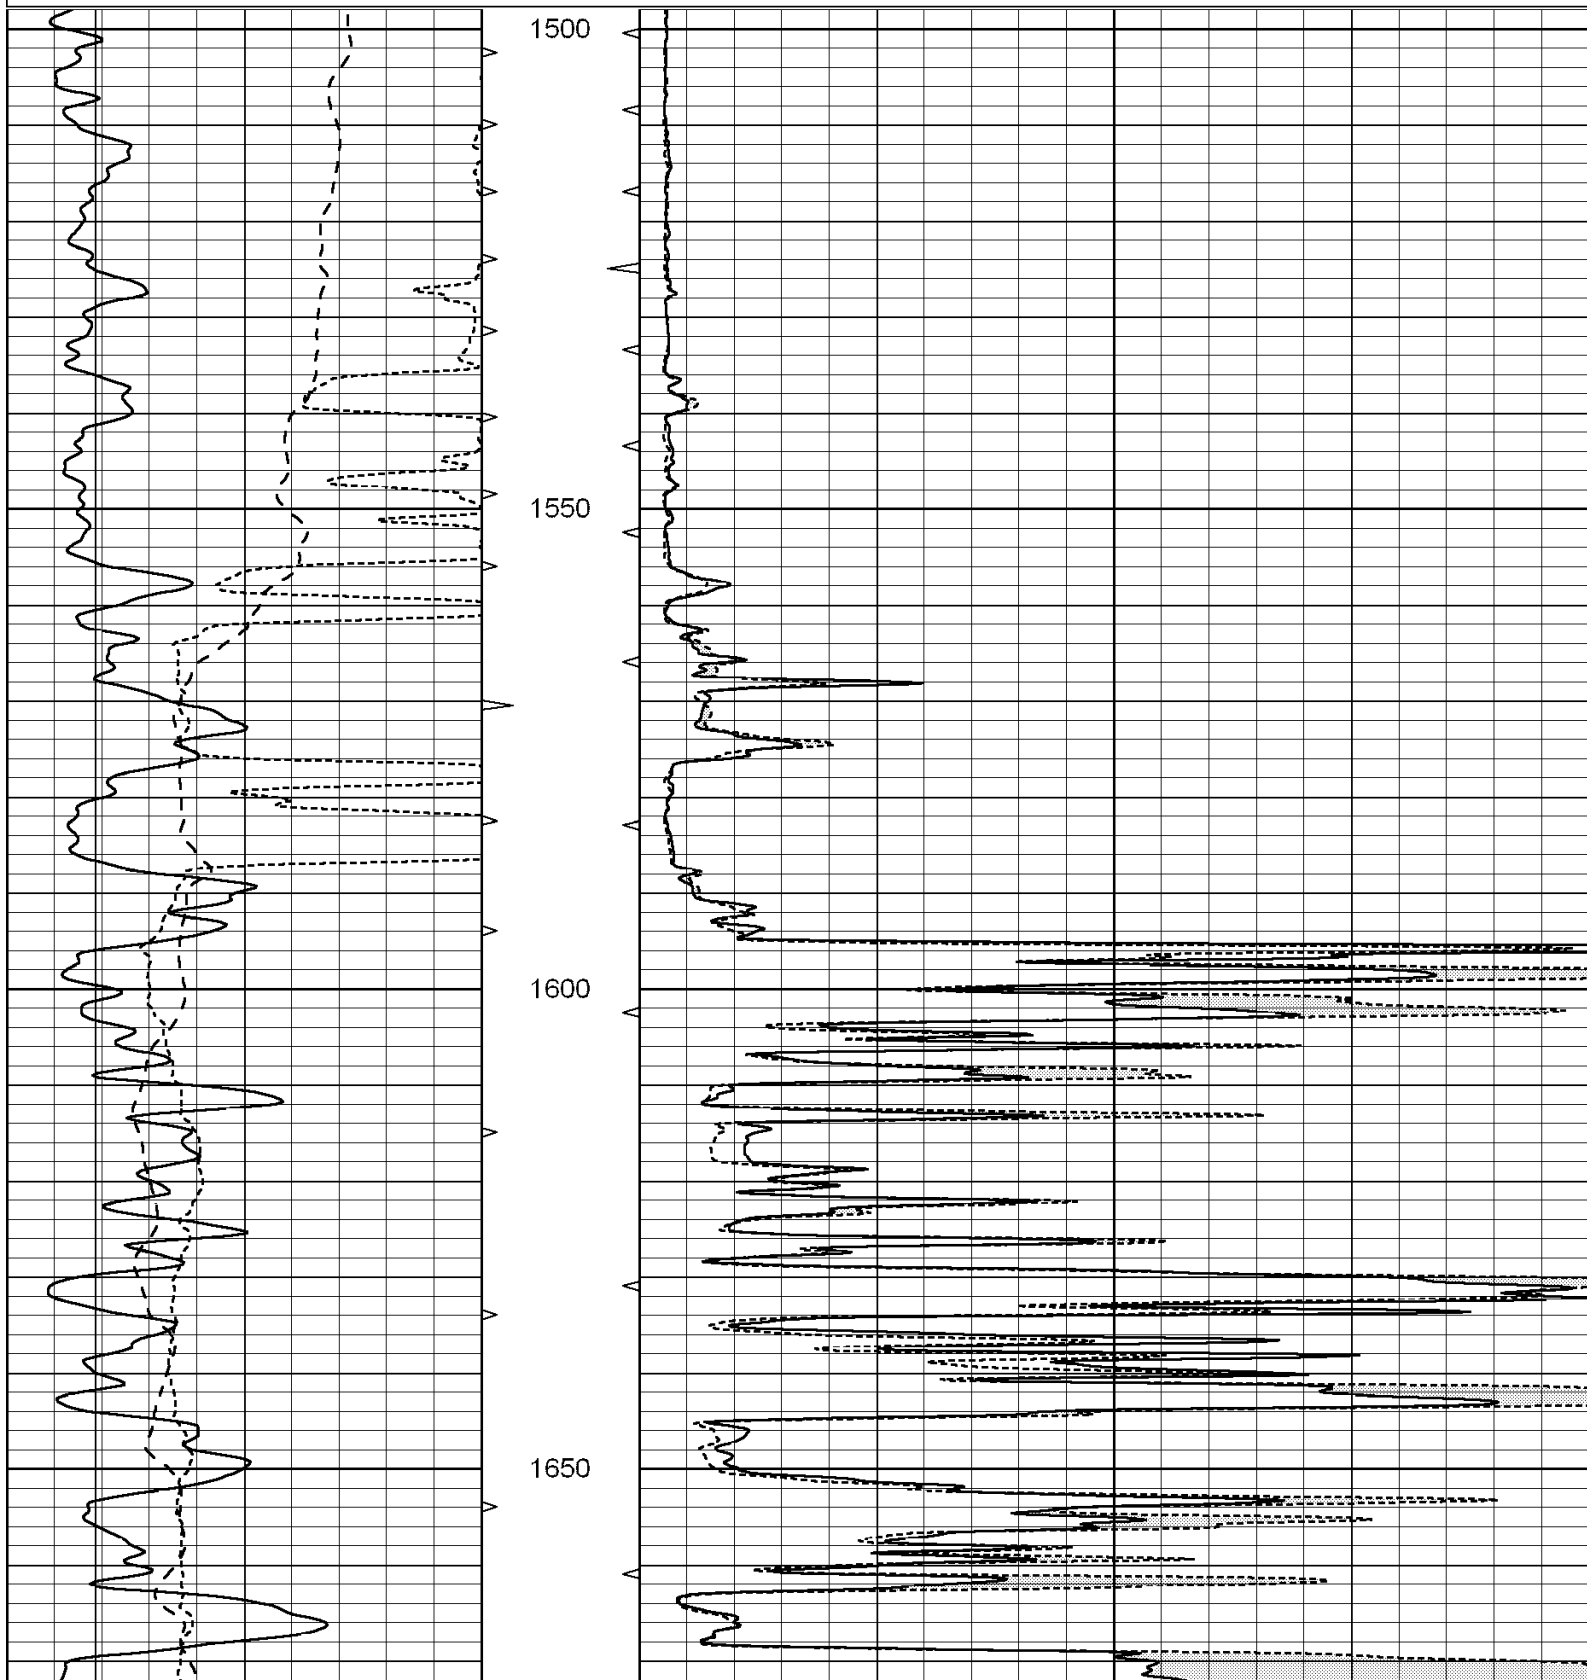

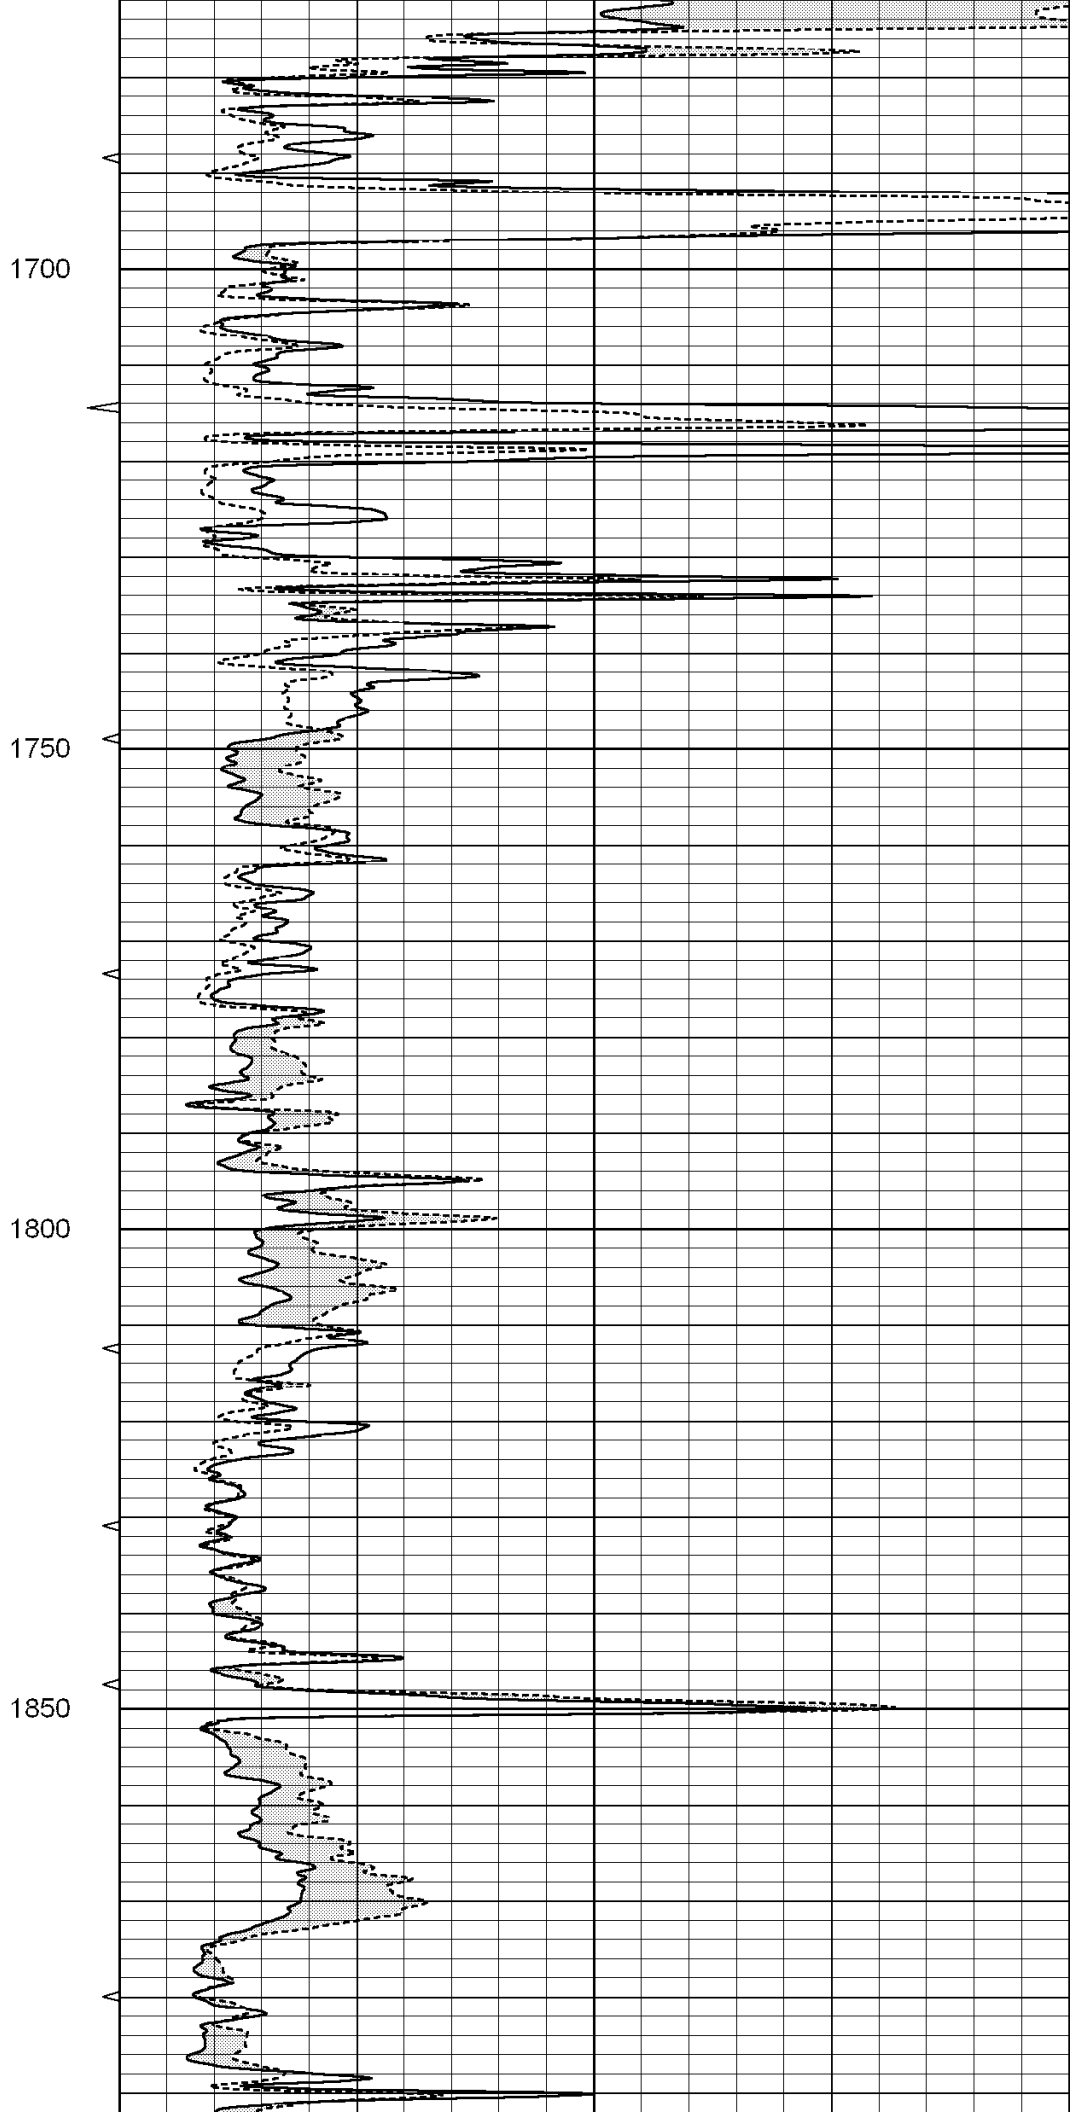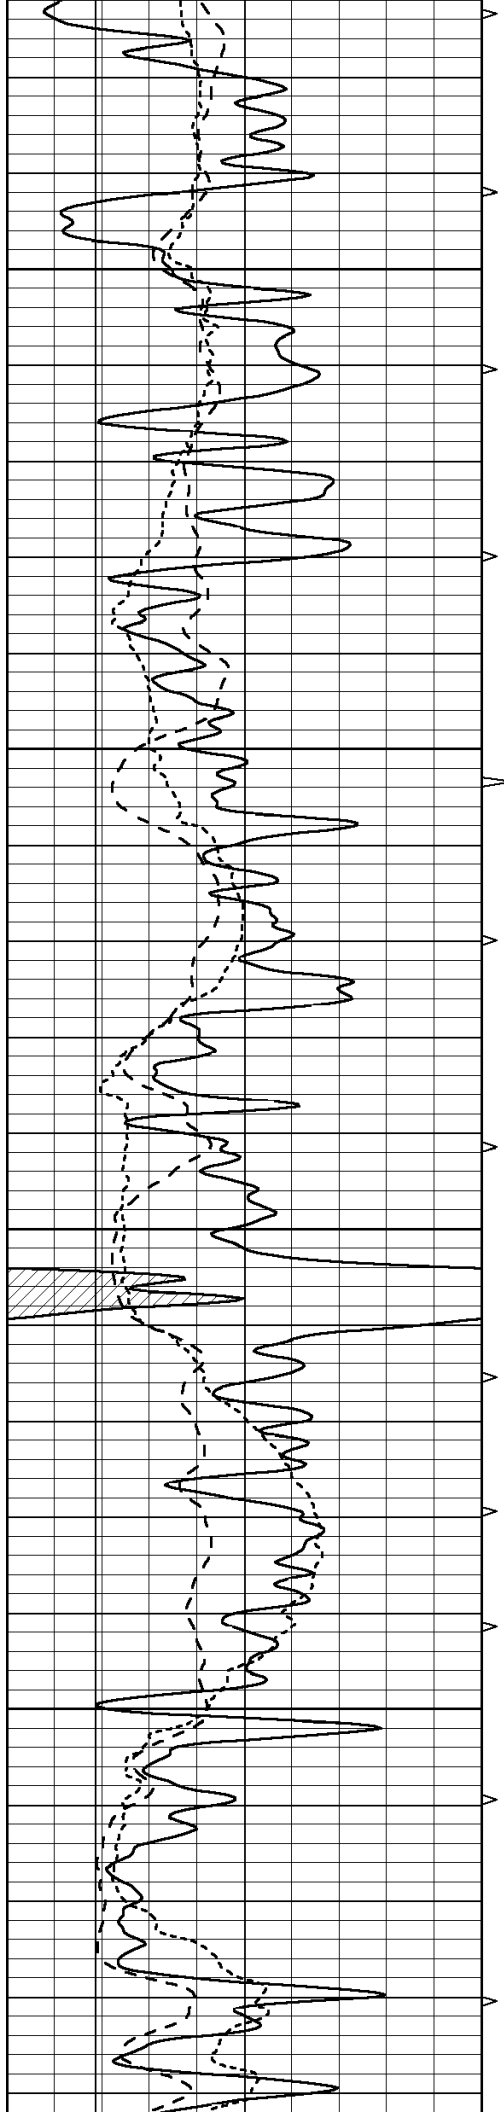

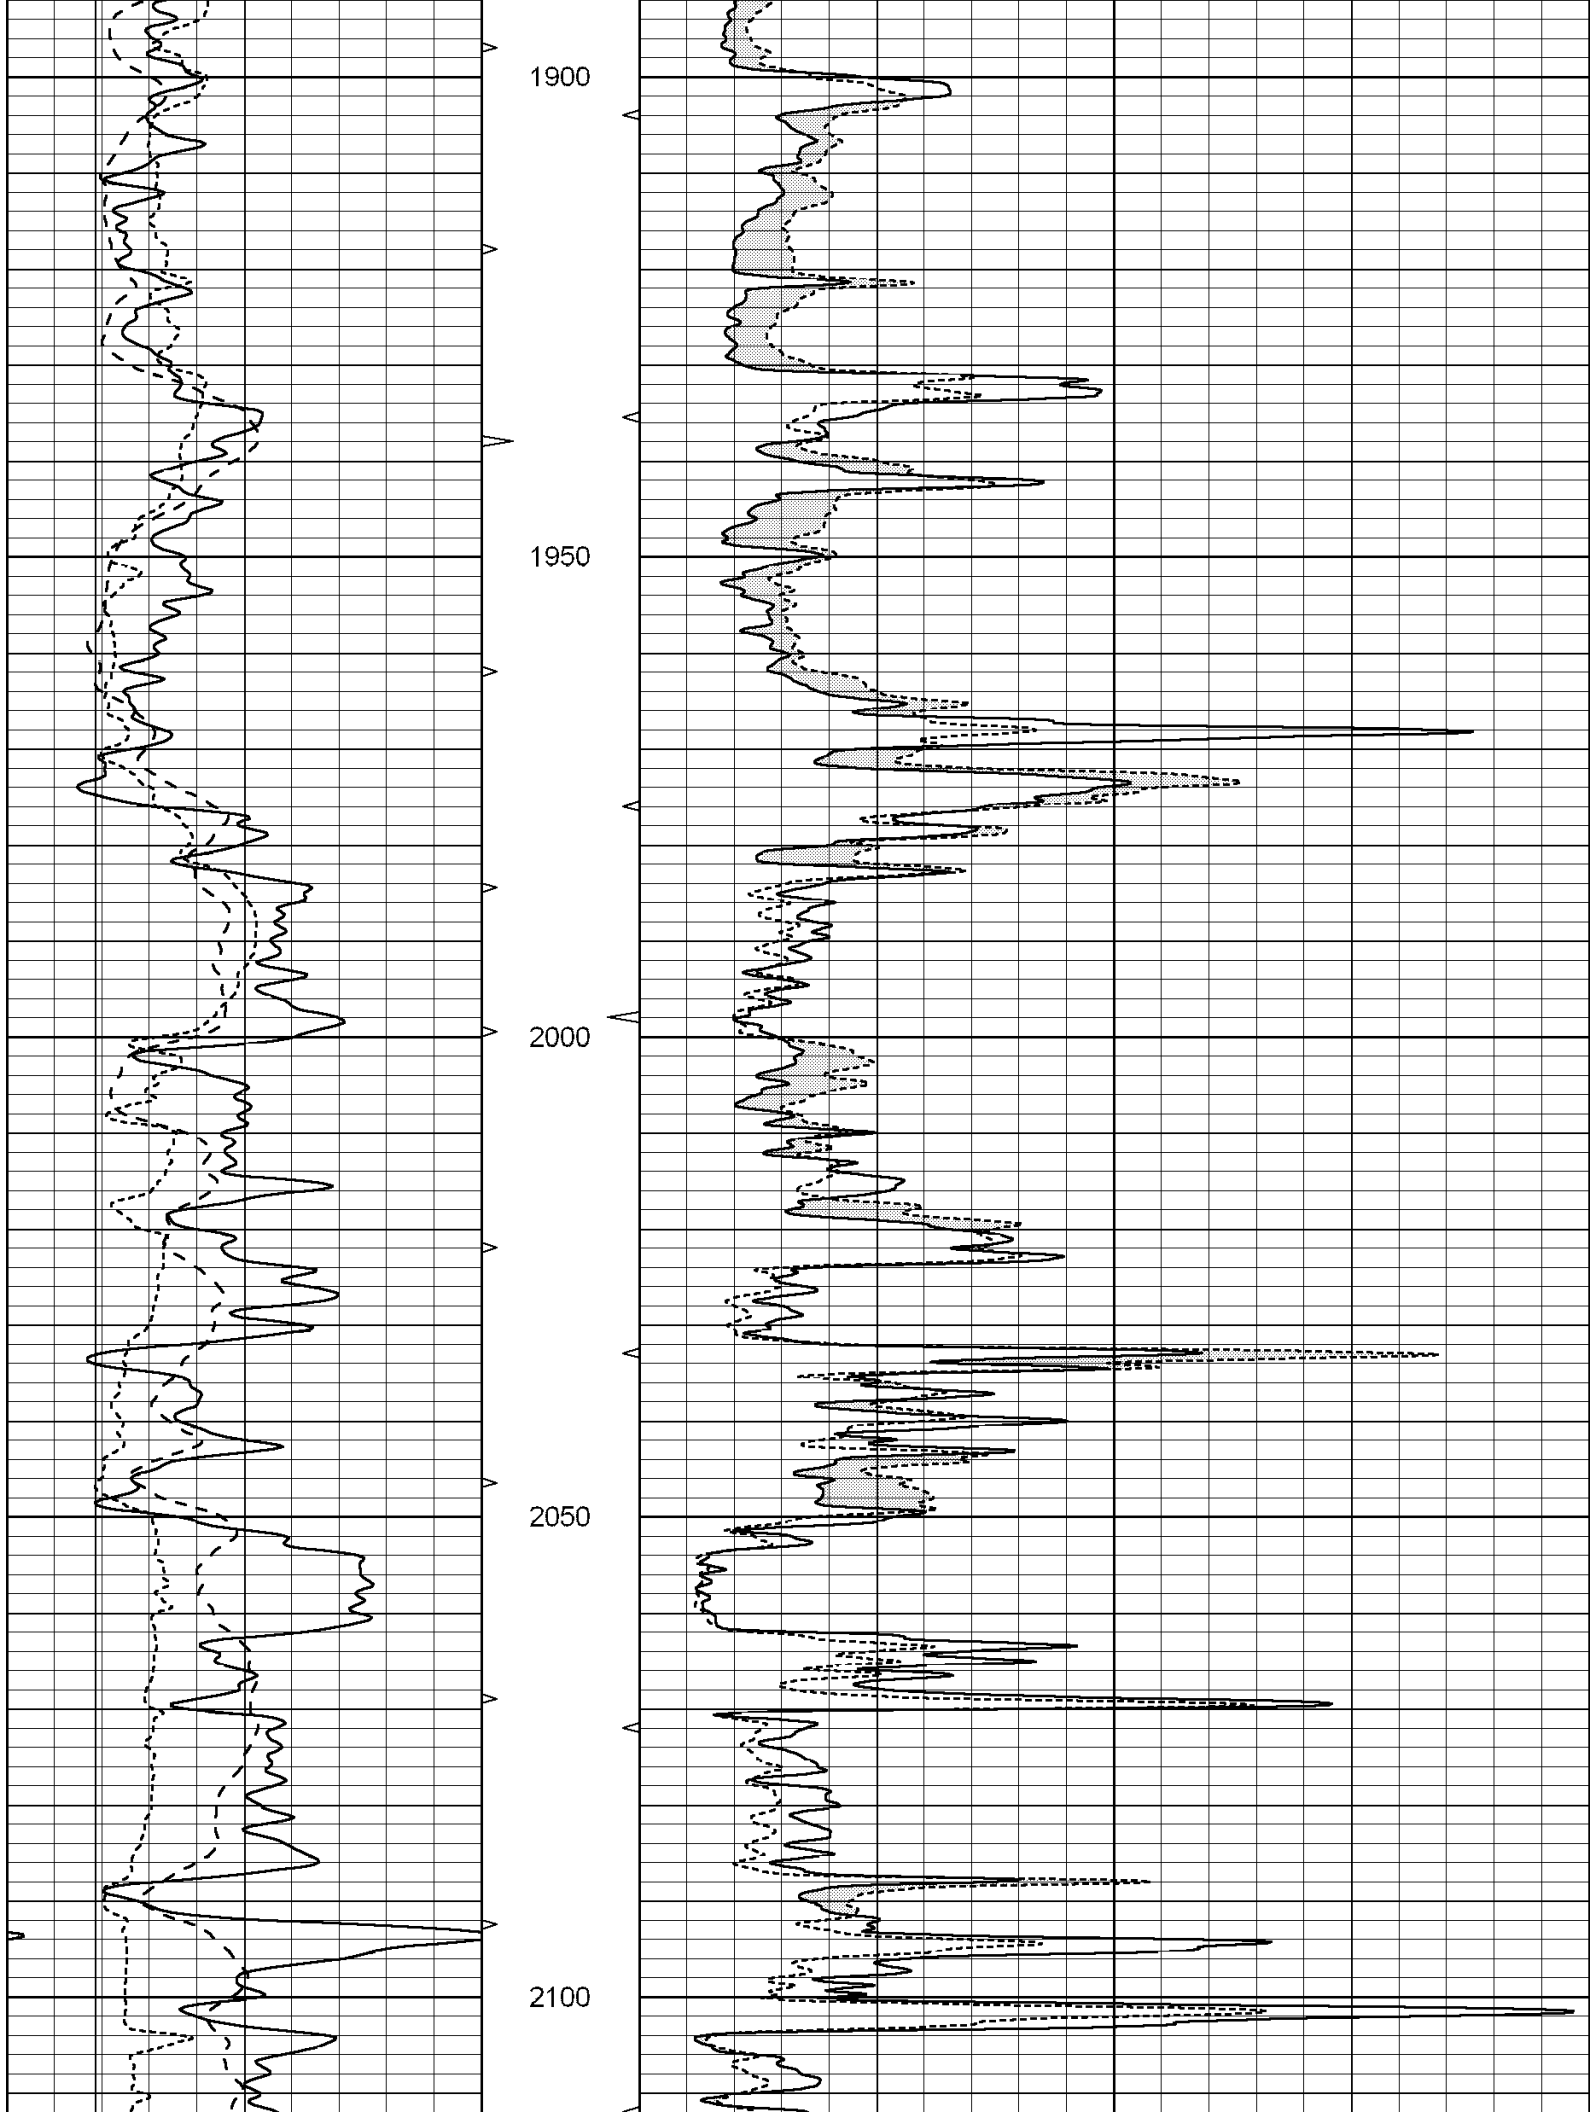

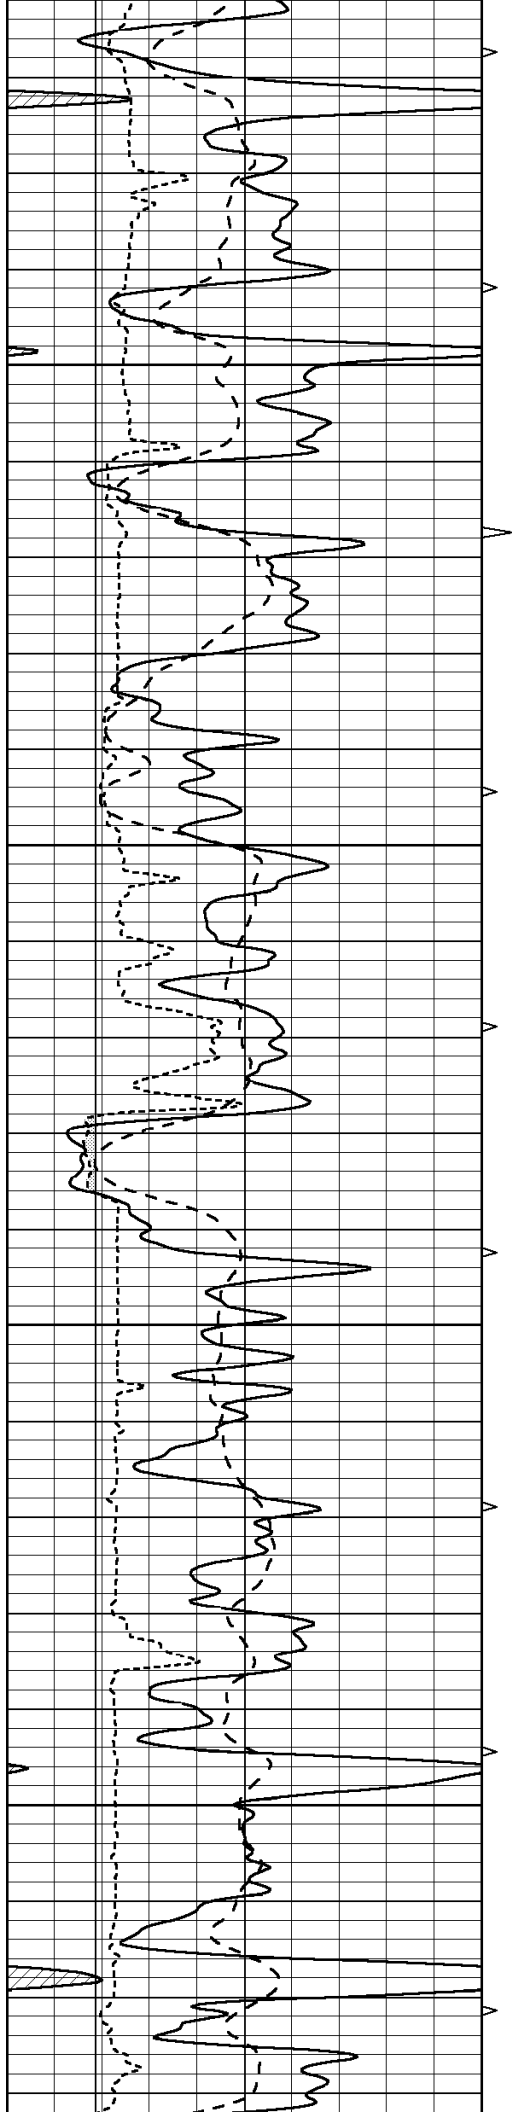



2150


2200


2250

2300

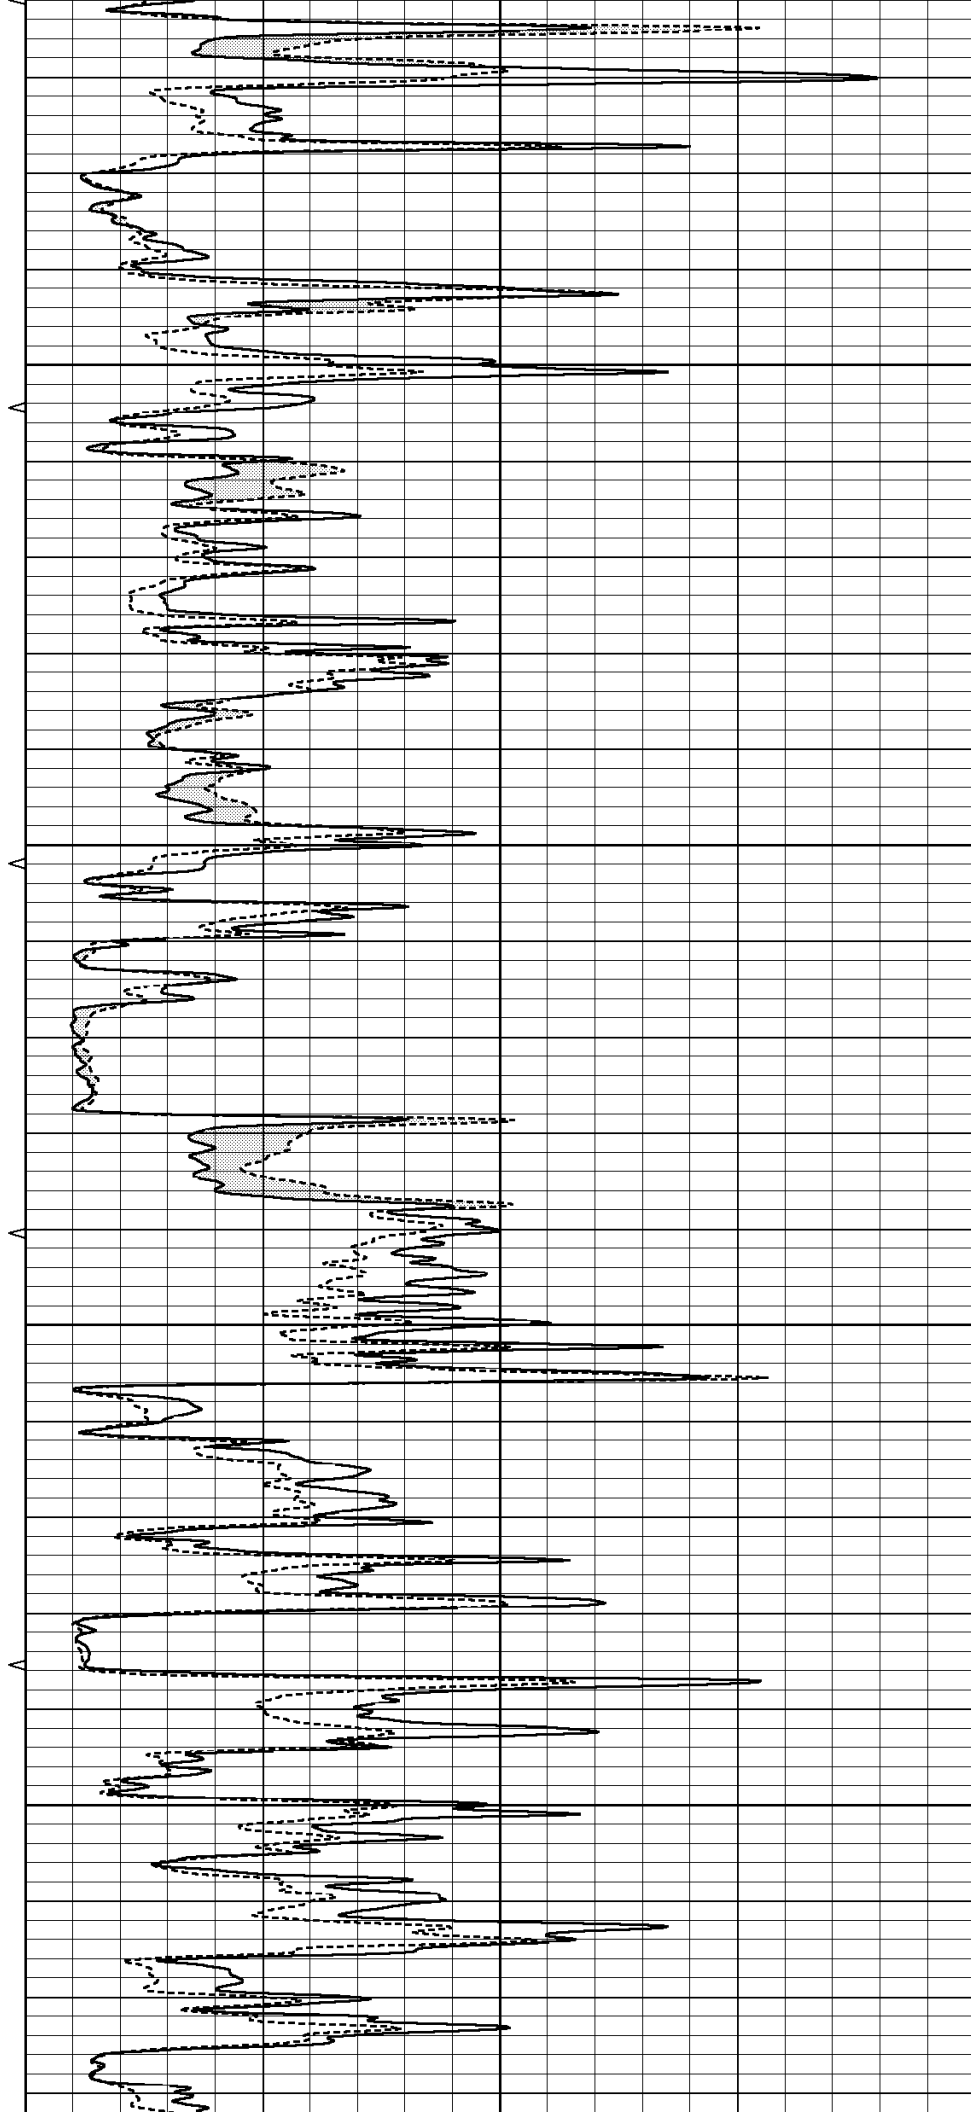

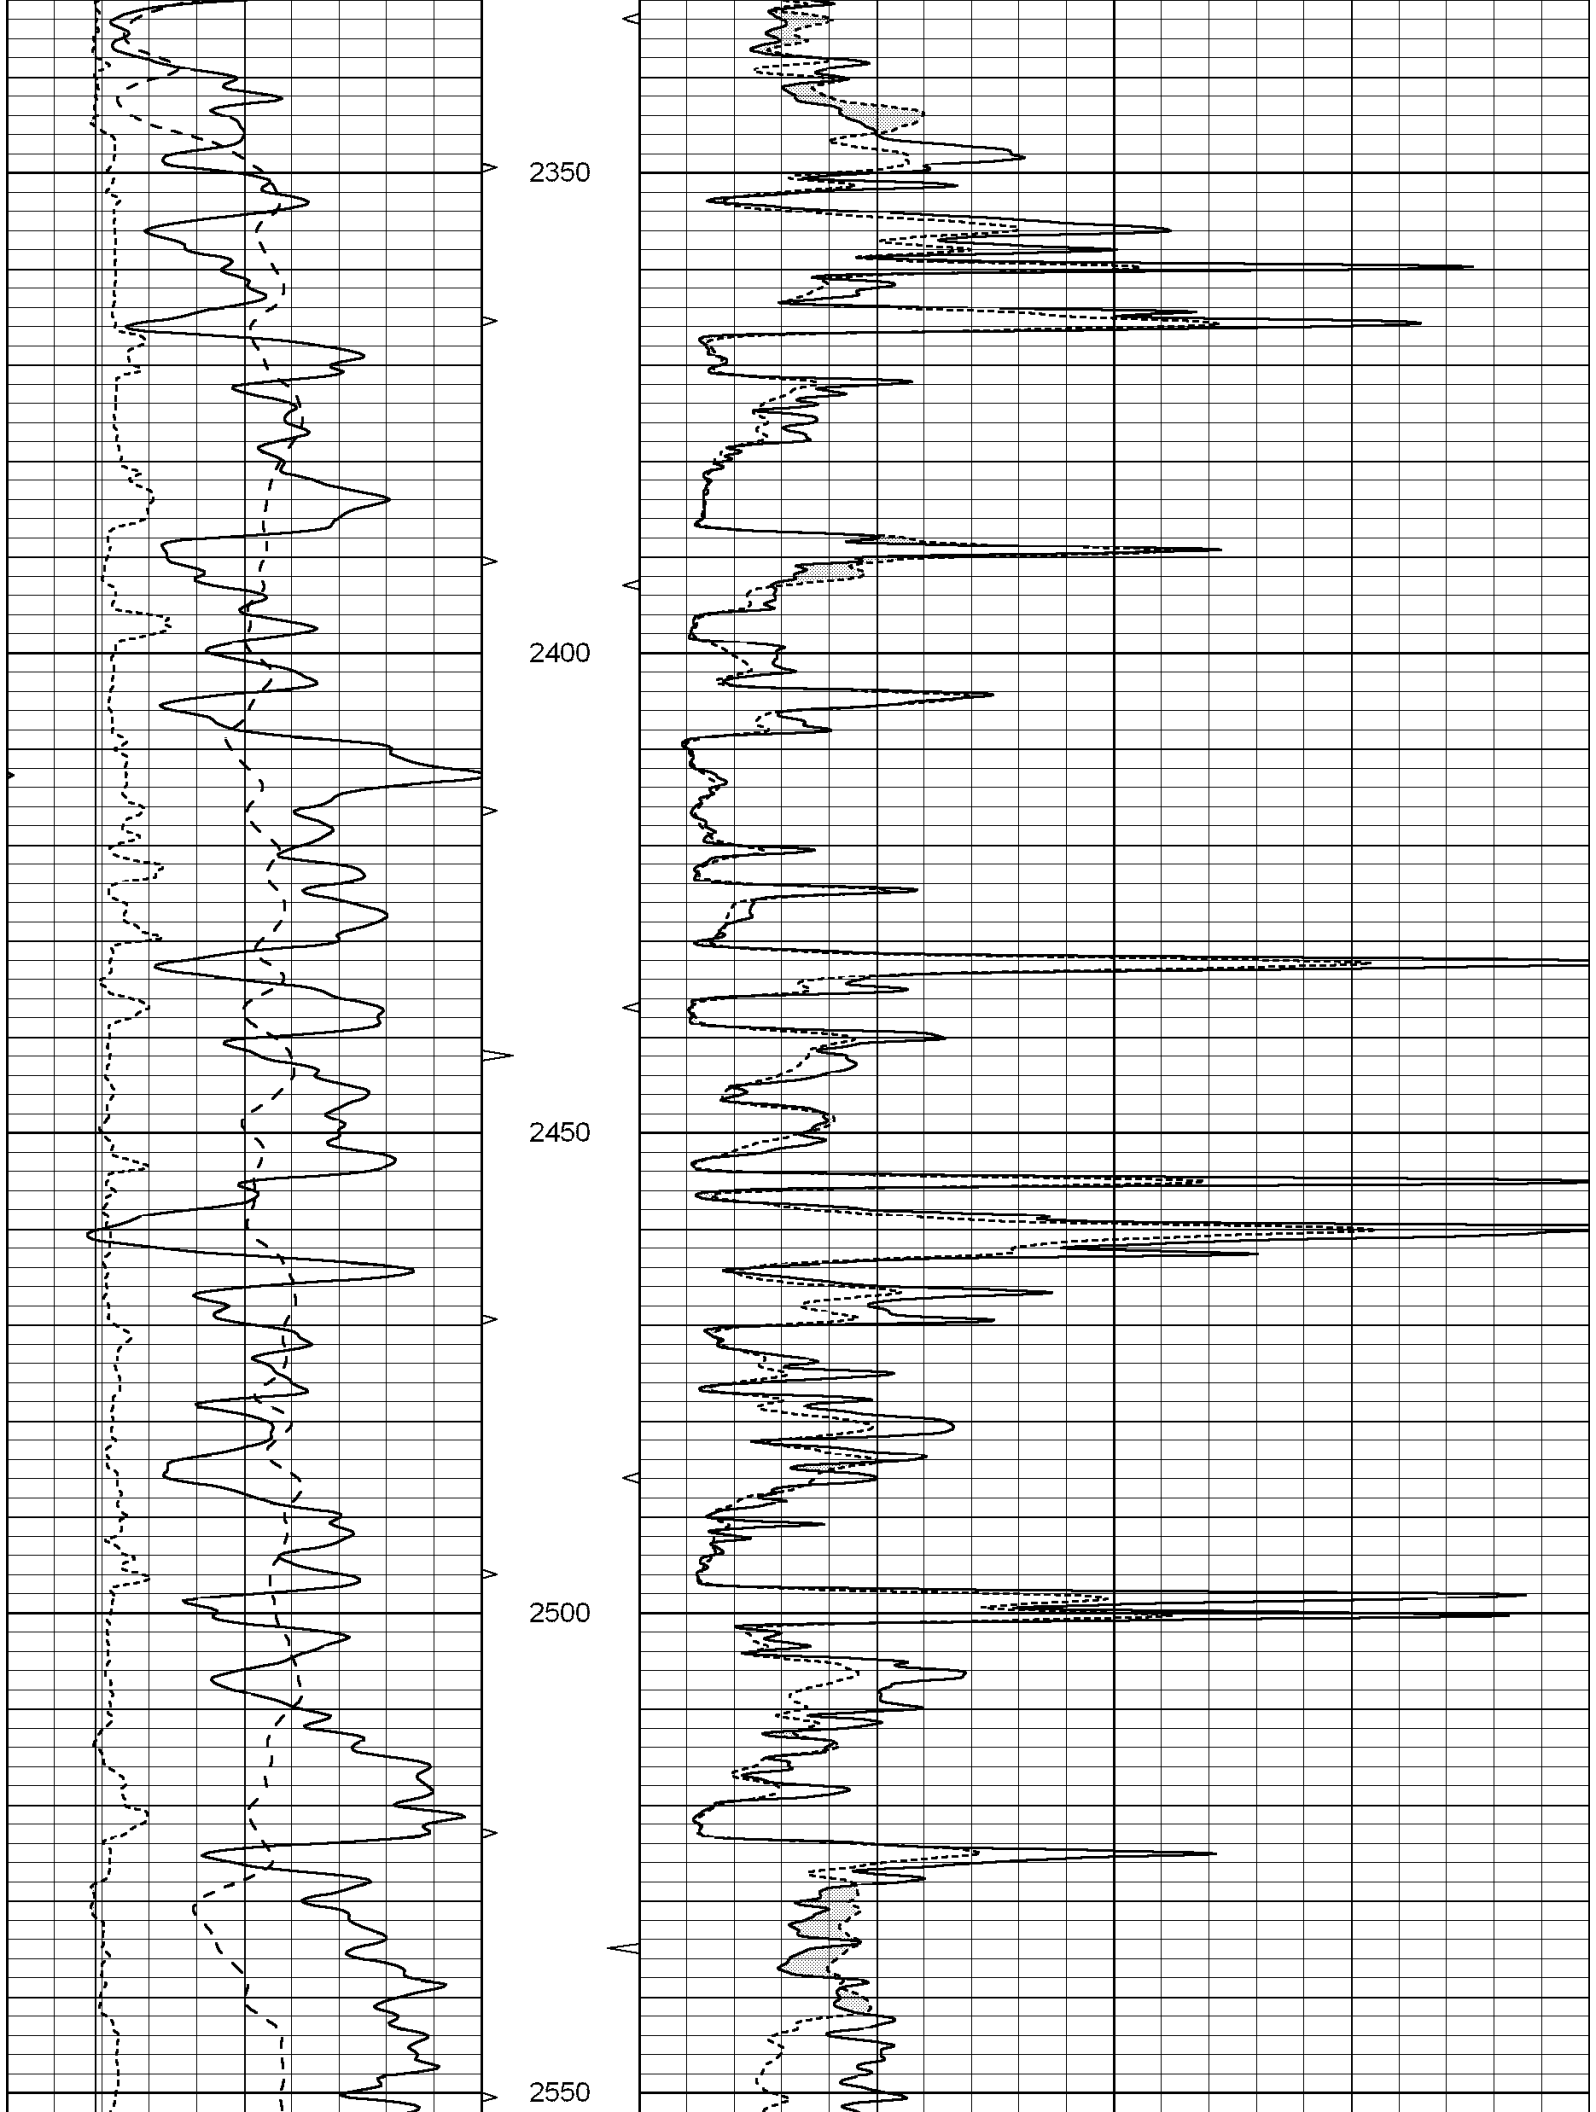

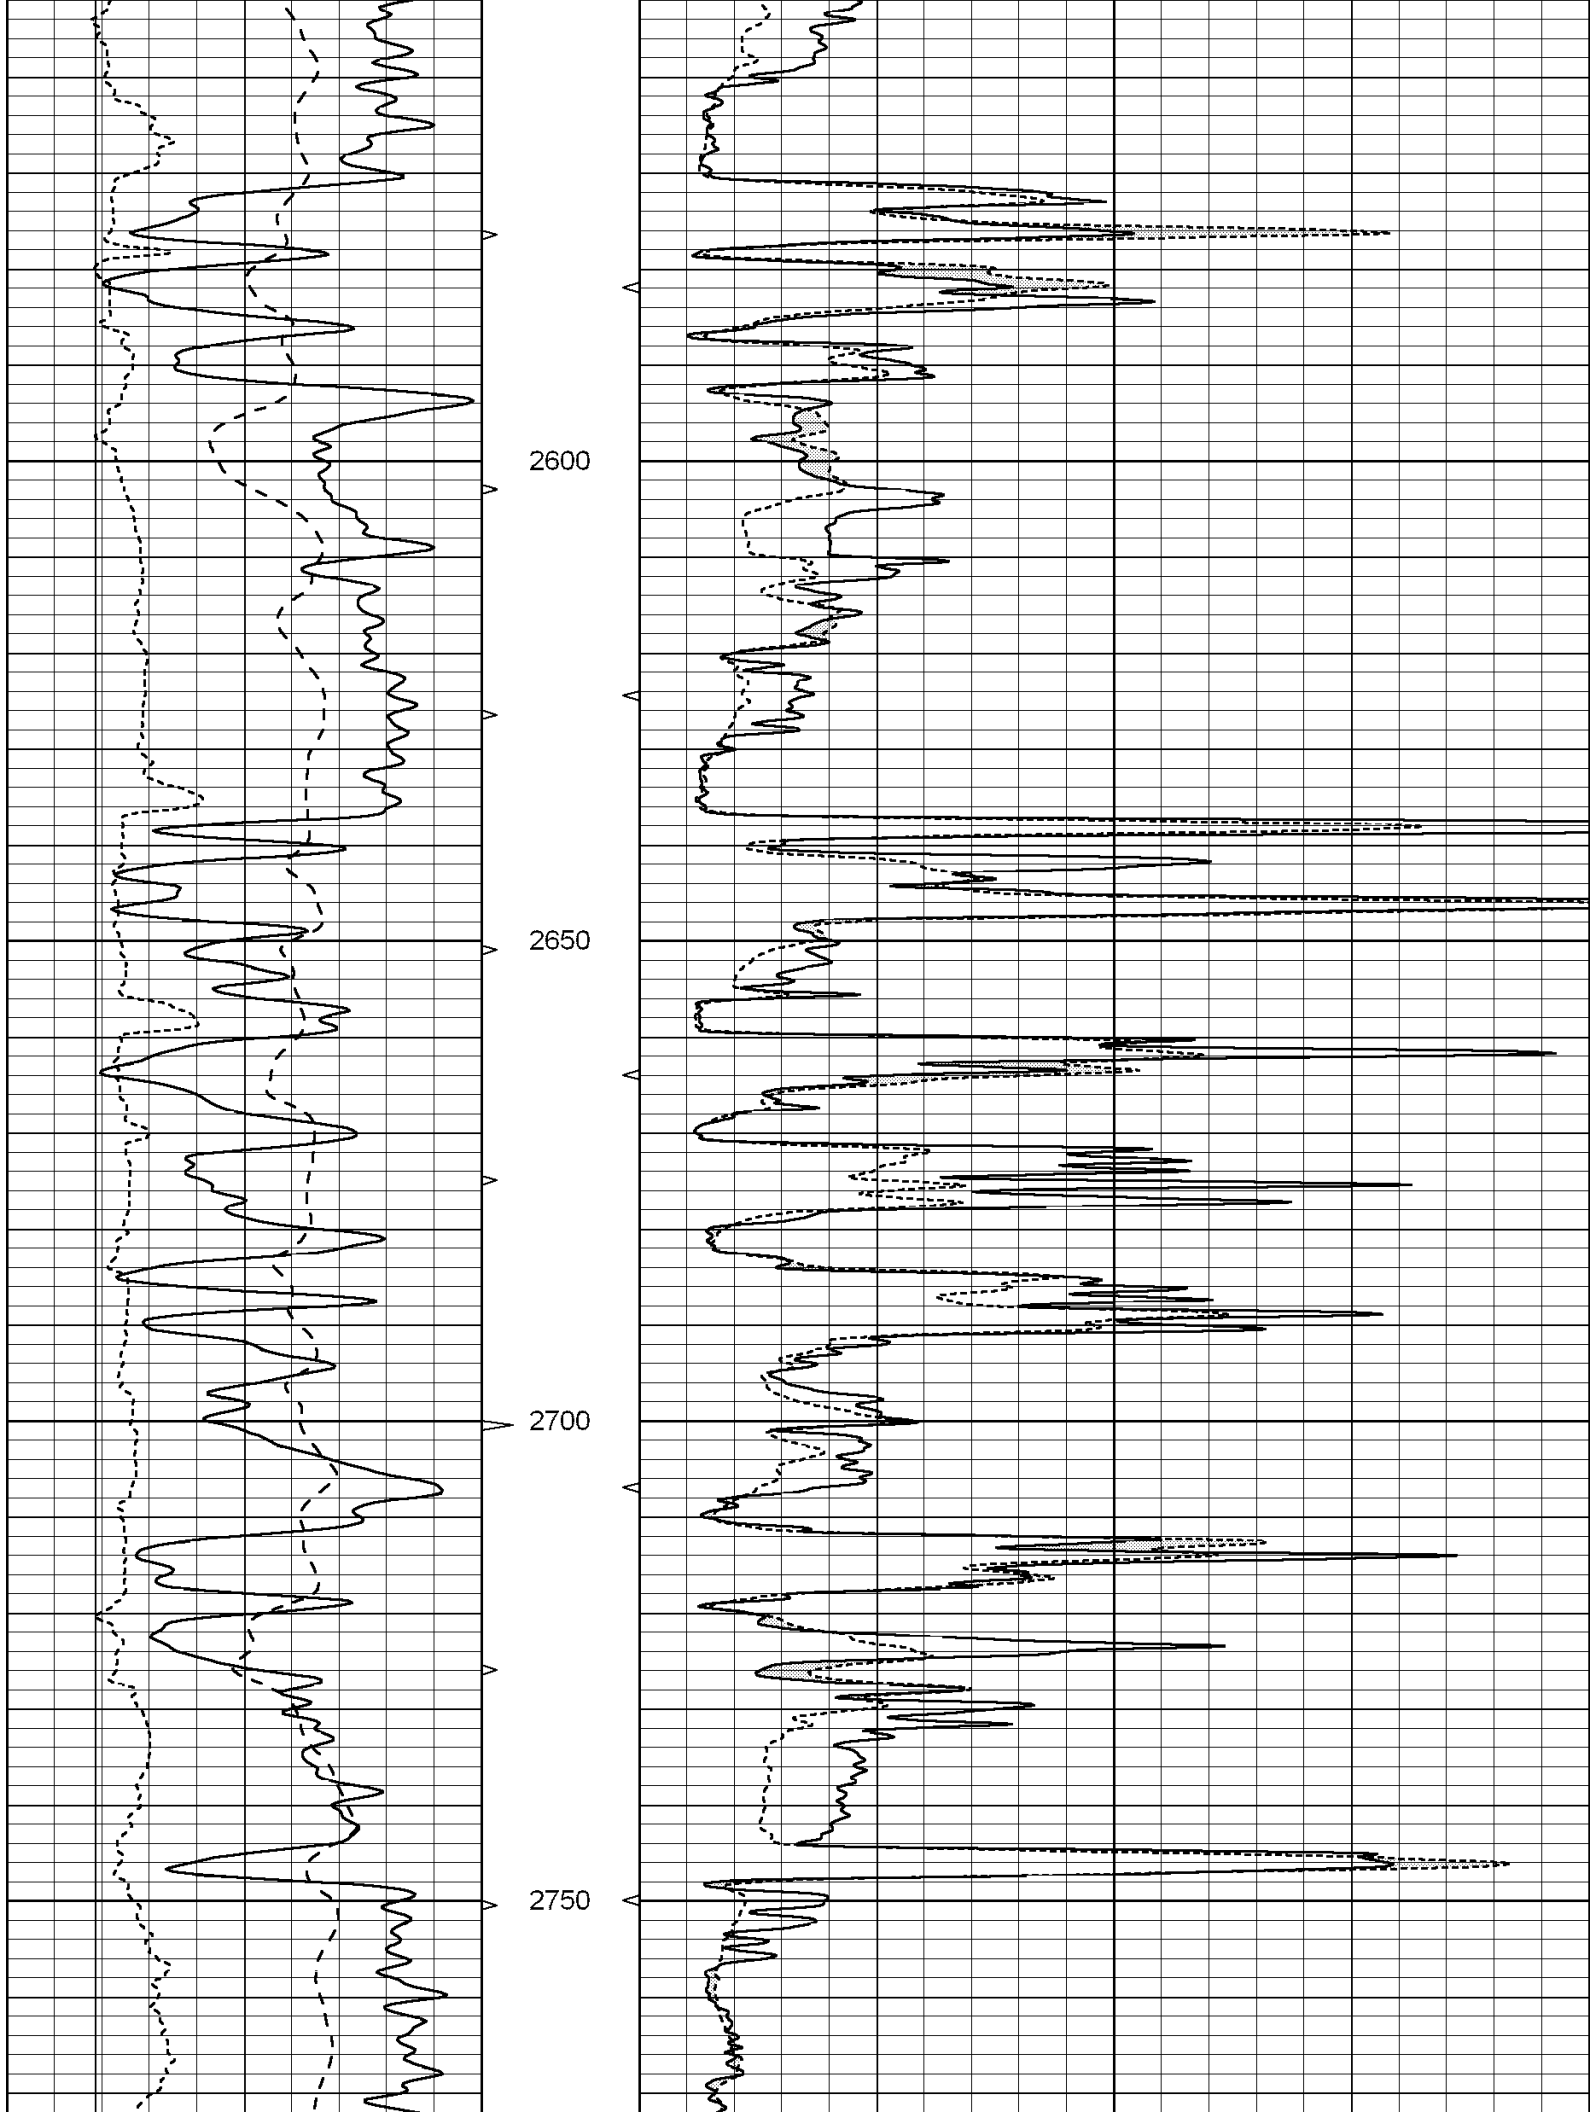

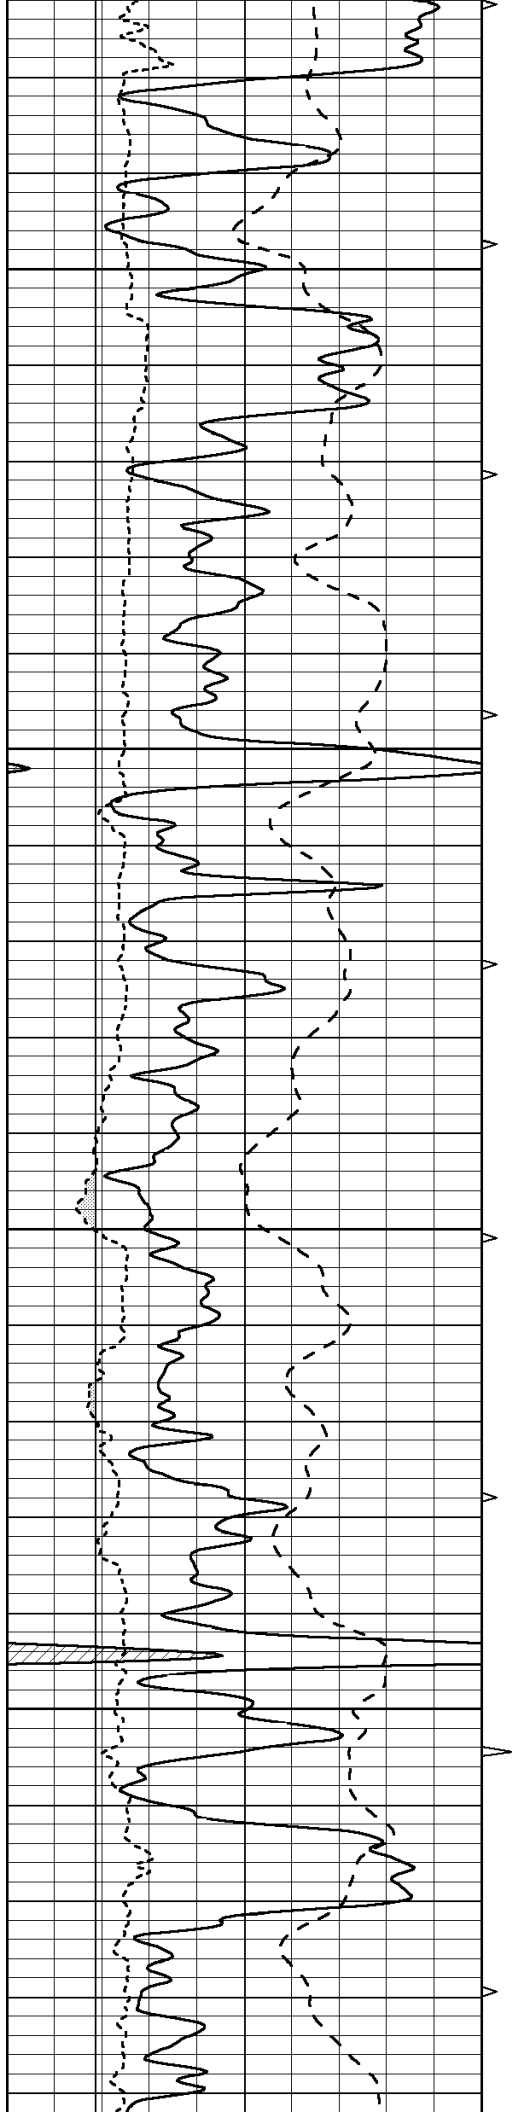



2800

2850

2900

2950

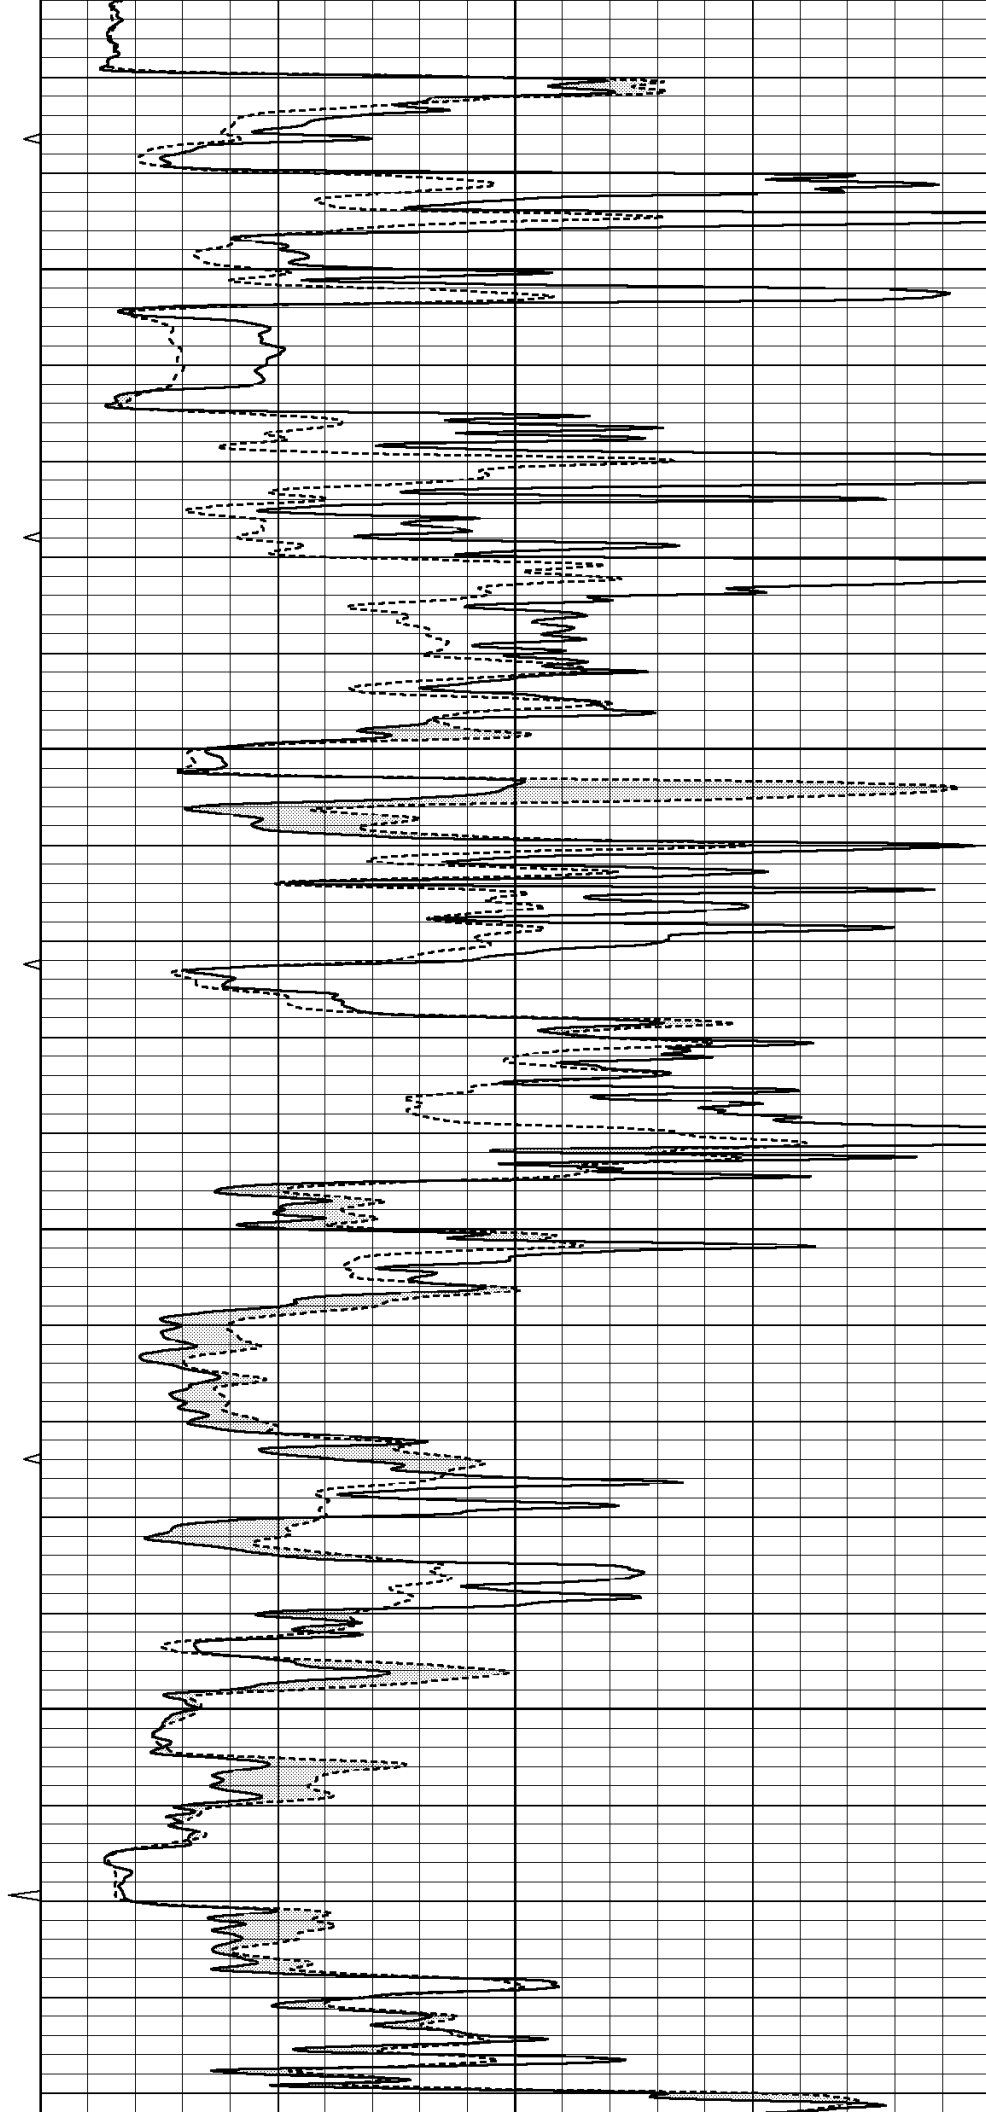

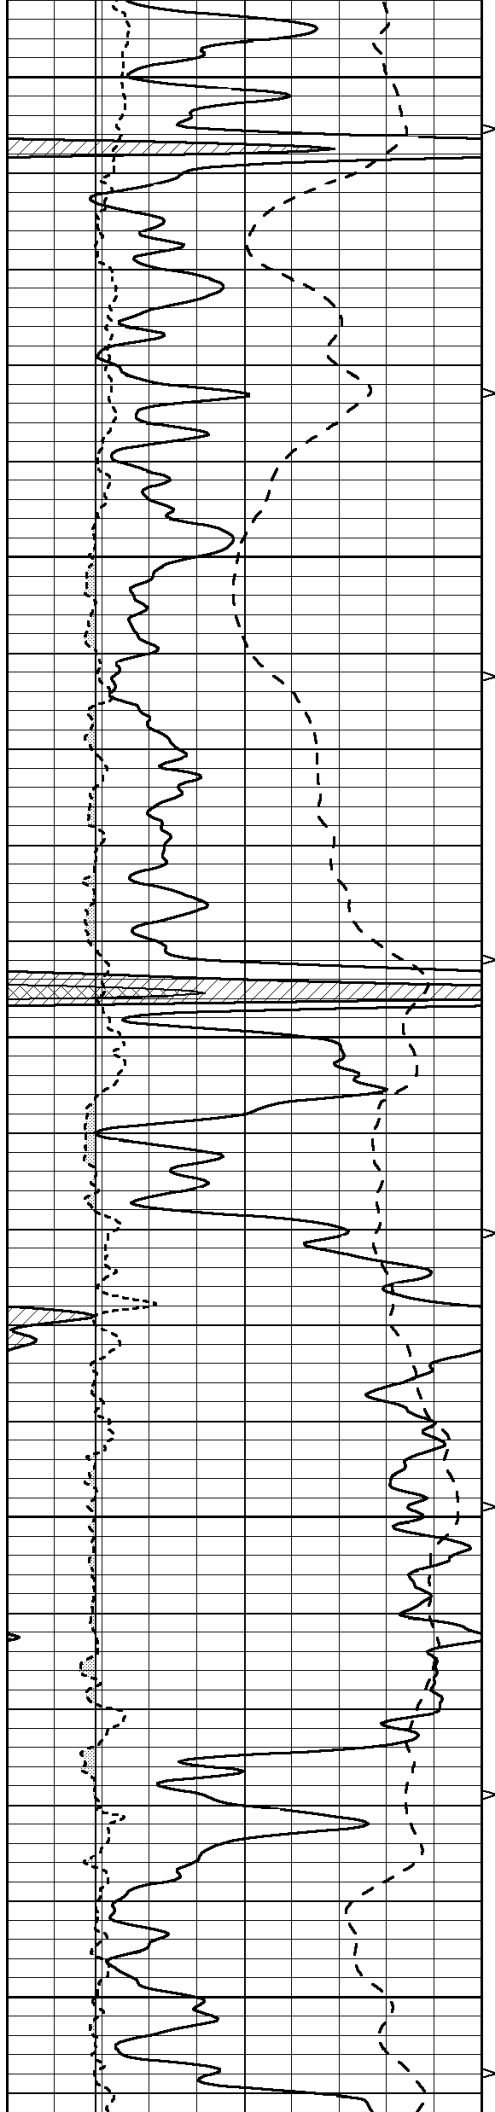


3000


3050

3100

3150

3200

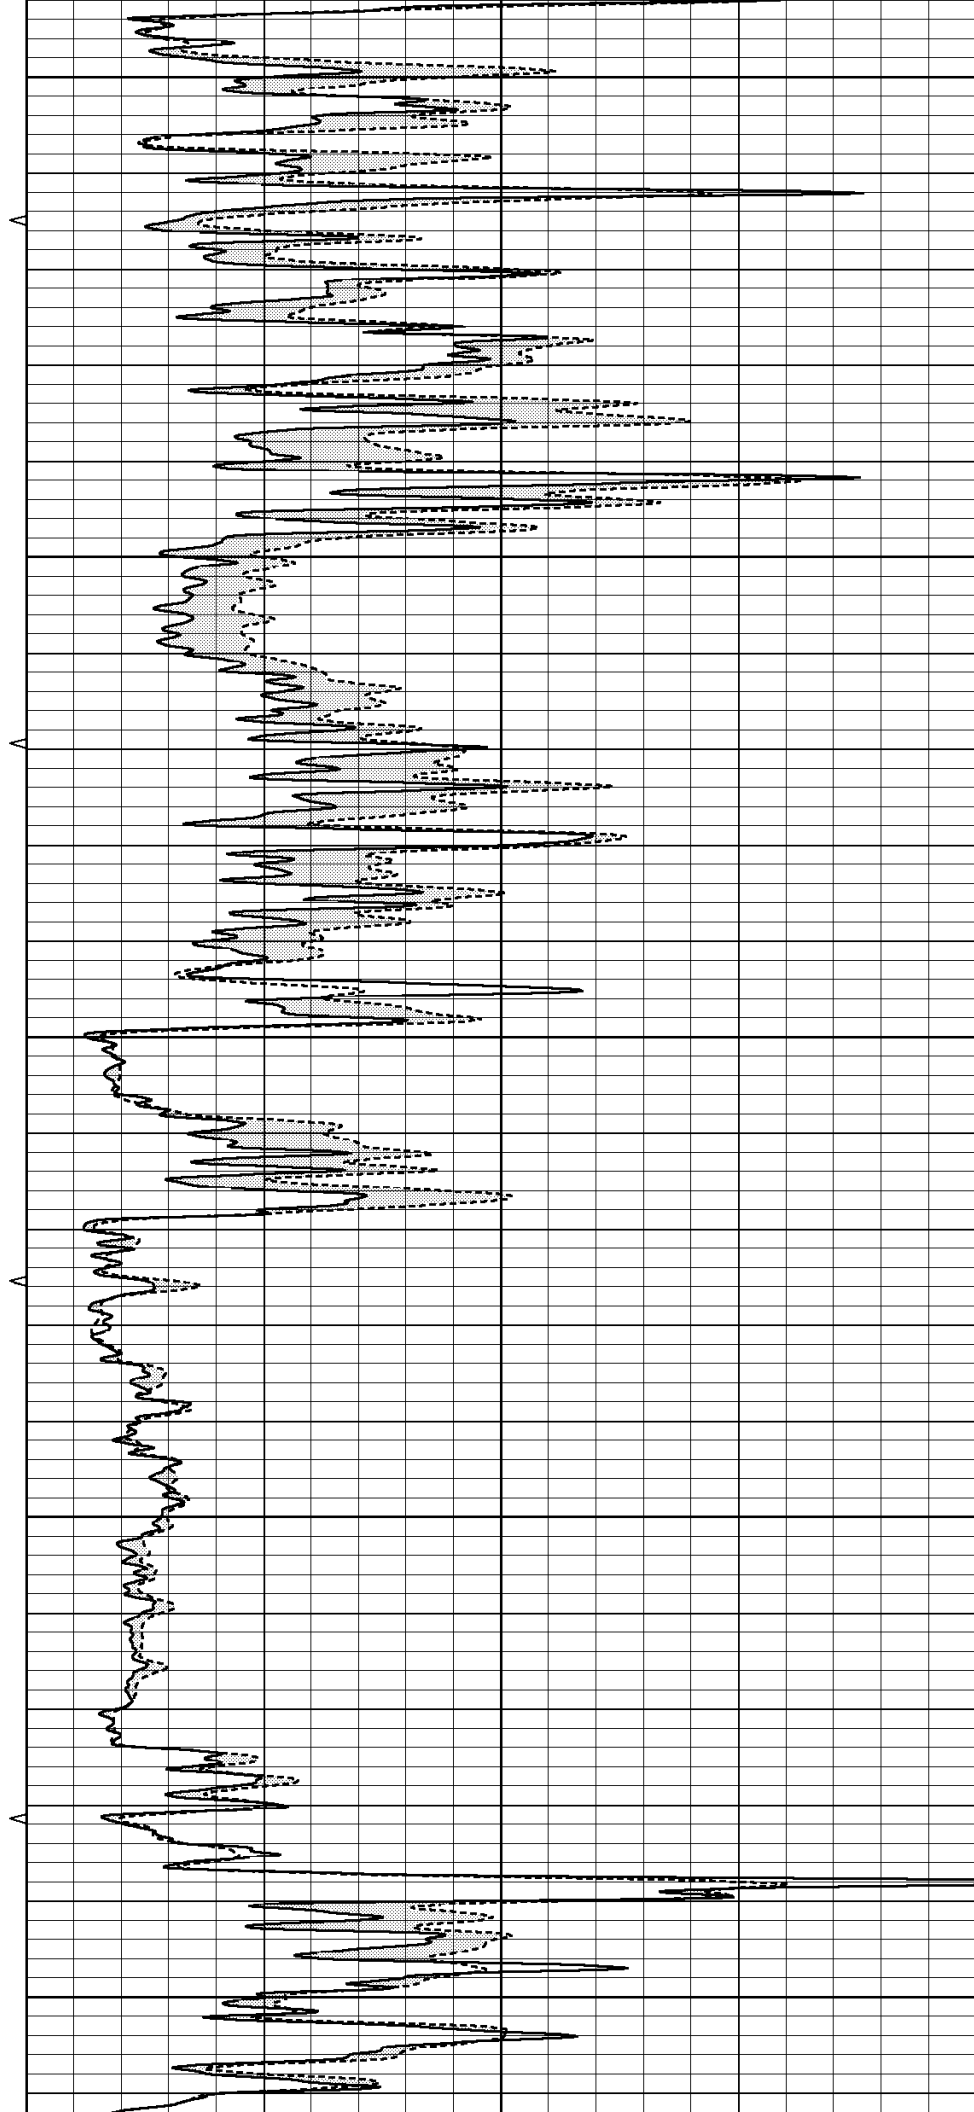

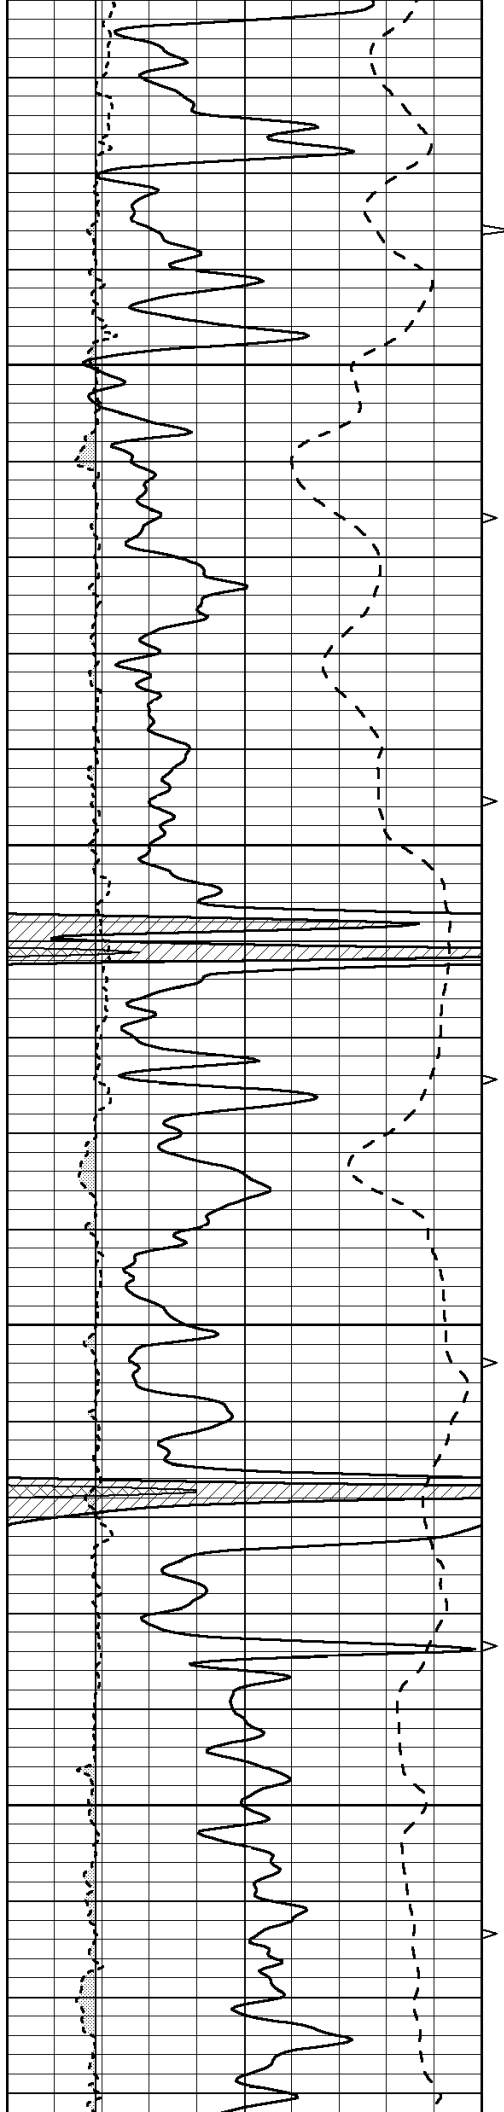



3250

3300

3350

3400

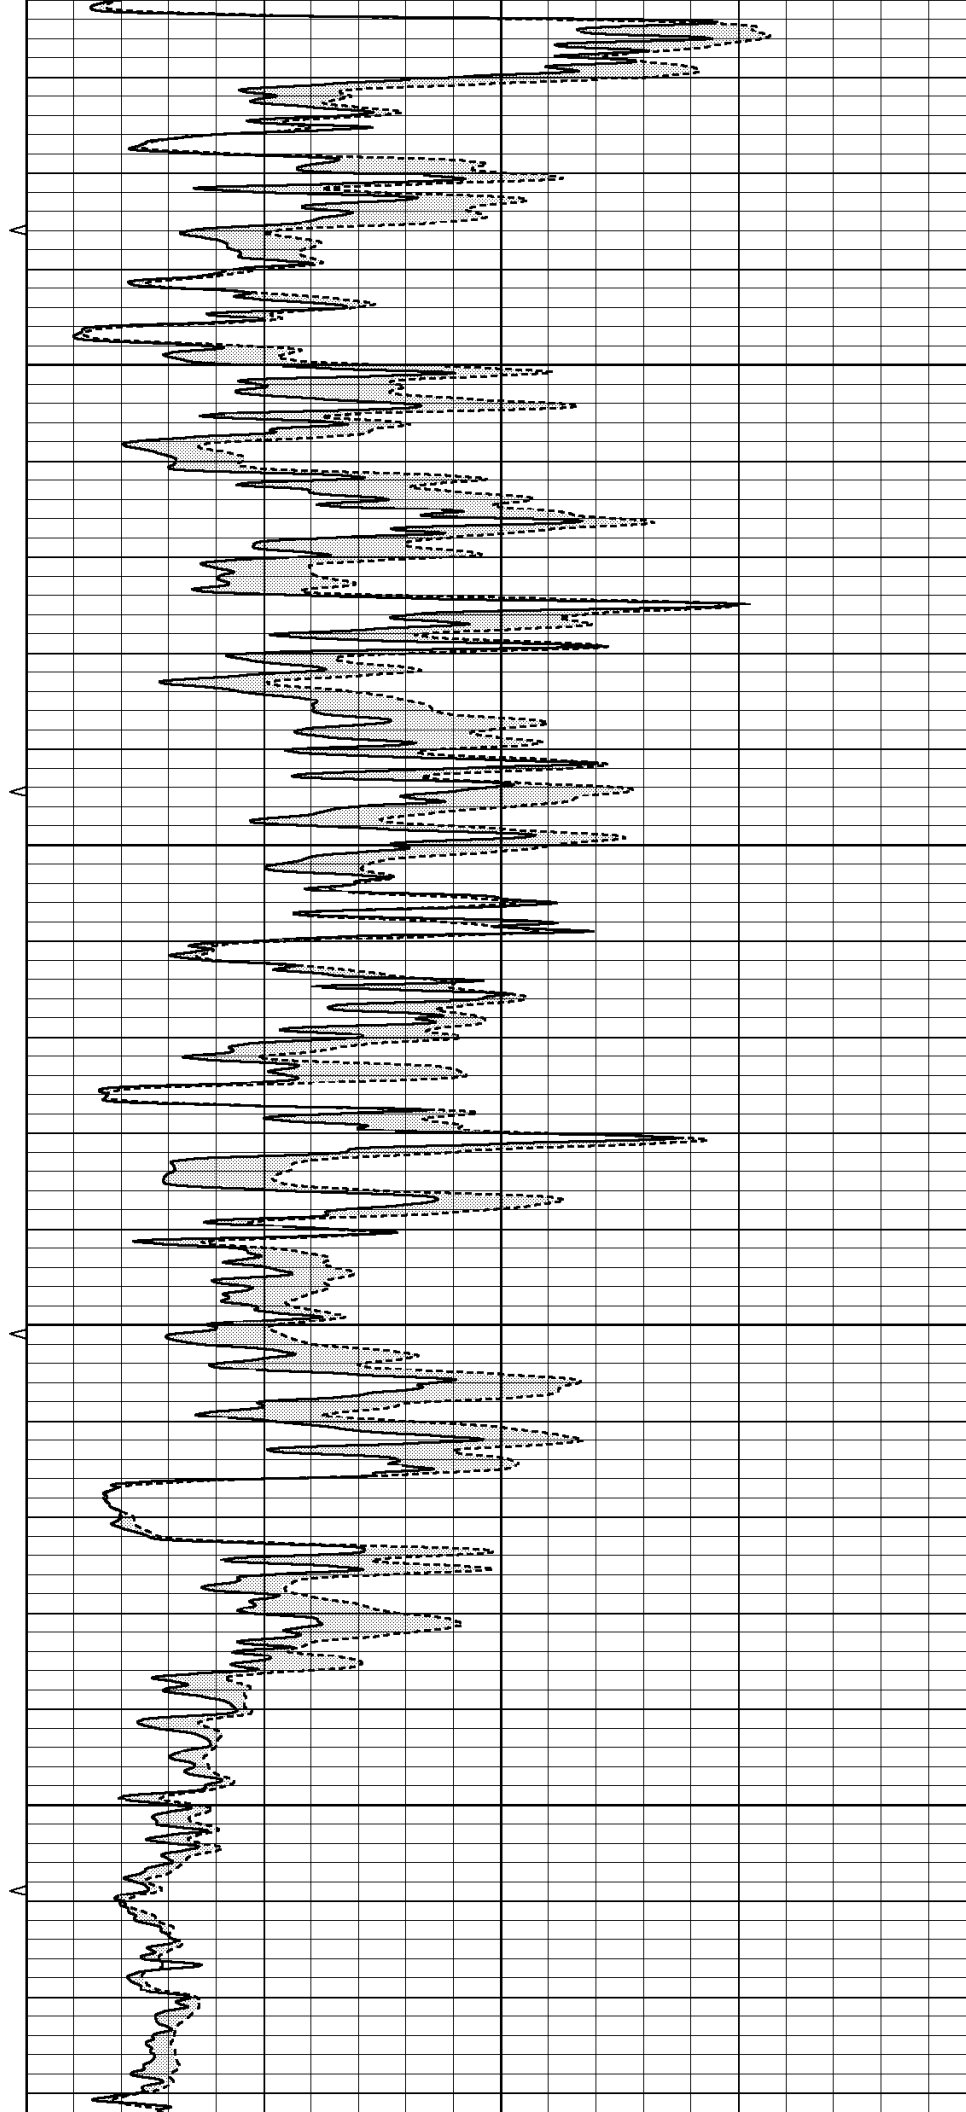

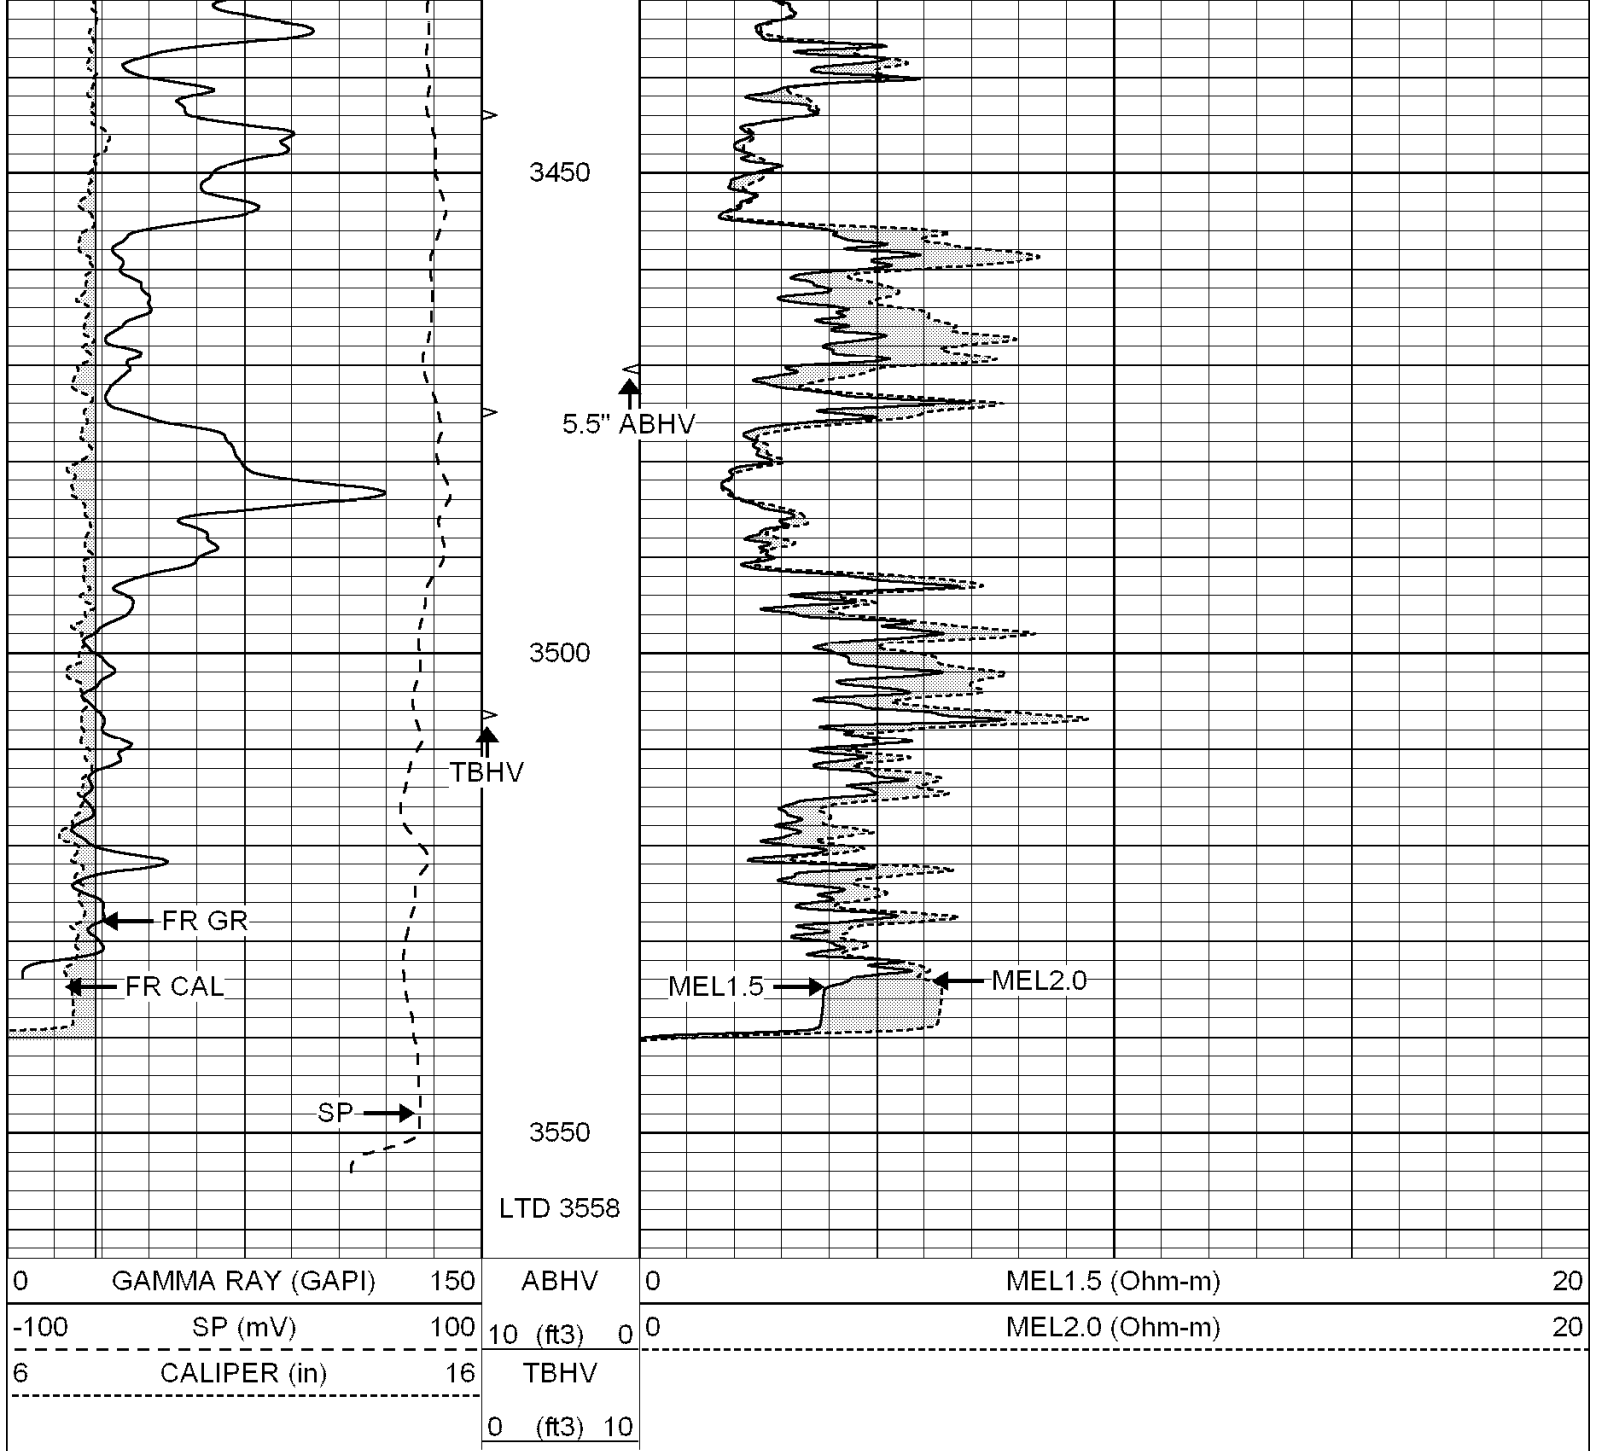


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 001595pe.db
 Dataset Pathname: pass5.2
 Presentation Format: micro
 Dataset Creation: Fri Jun 06 04:05:19 2008
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
-100	SP (mV)	100	10 (ft3)	0	MEL2.0 (Ohm-m)	20
6	CALIPER (in)	16	TBHV			
			0 (ft3)	10		

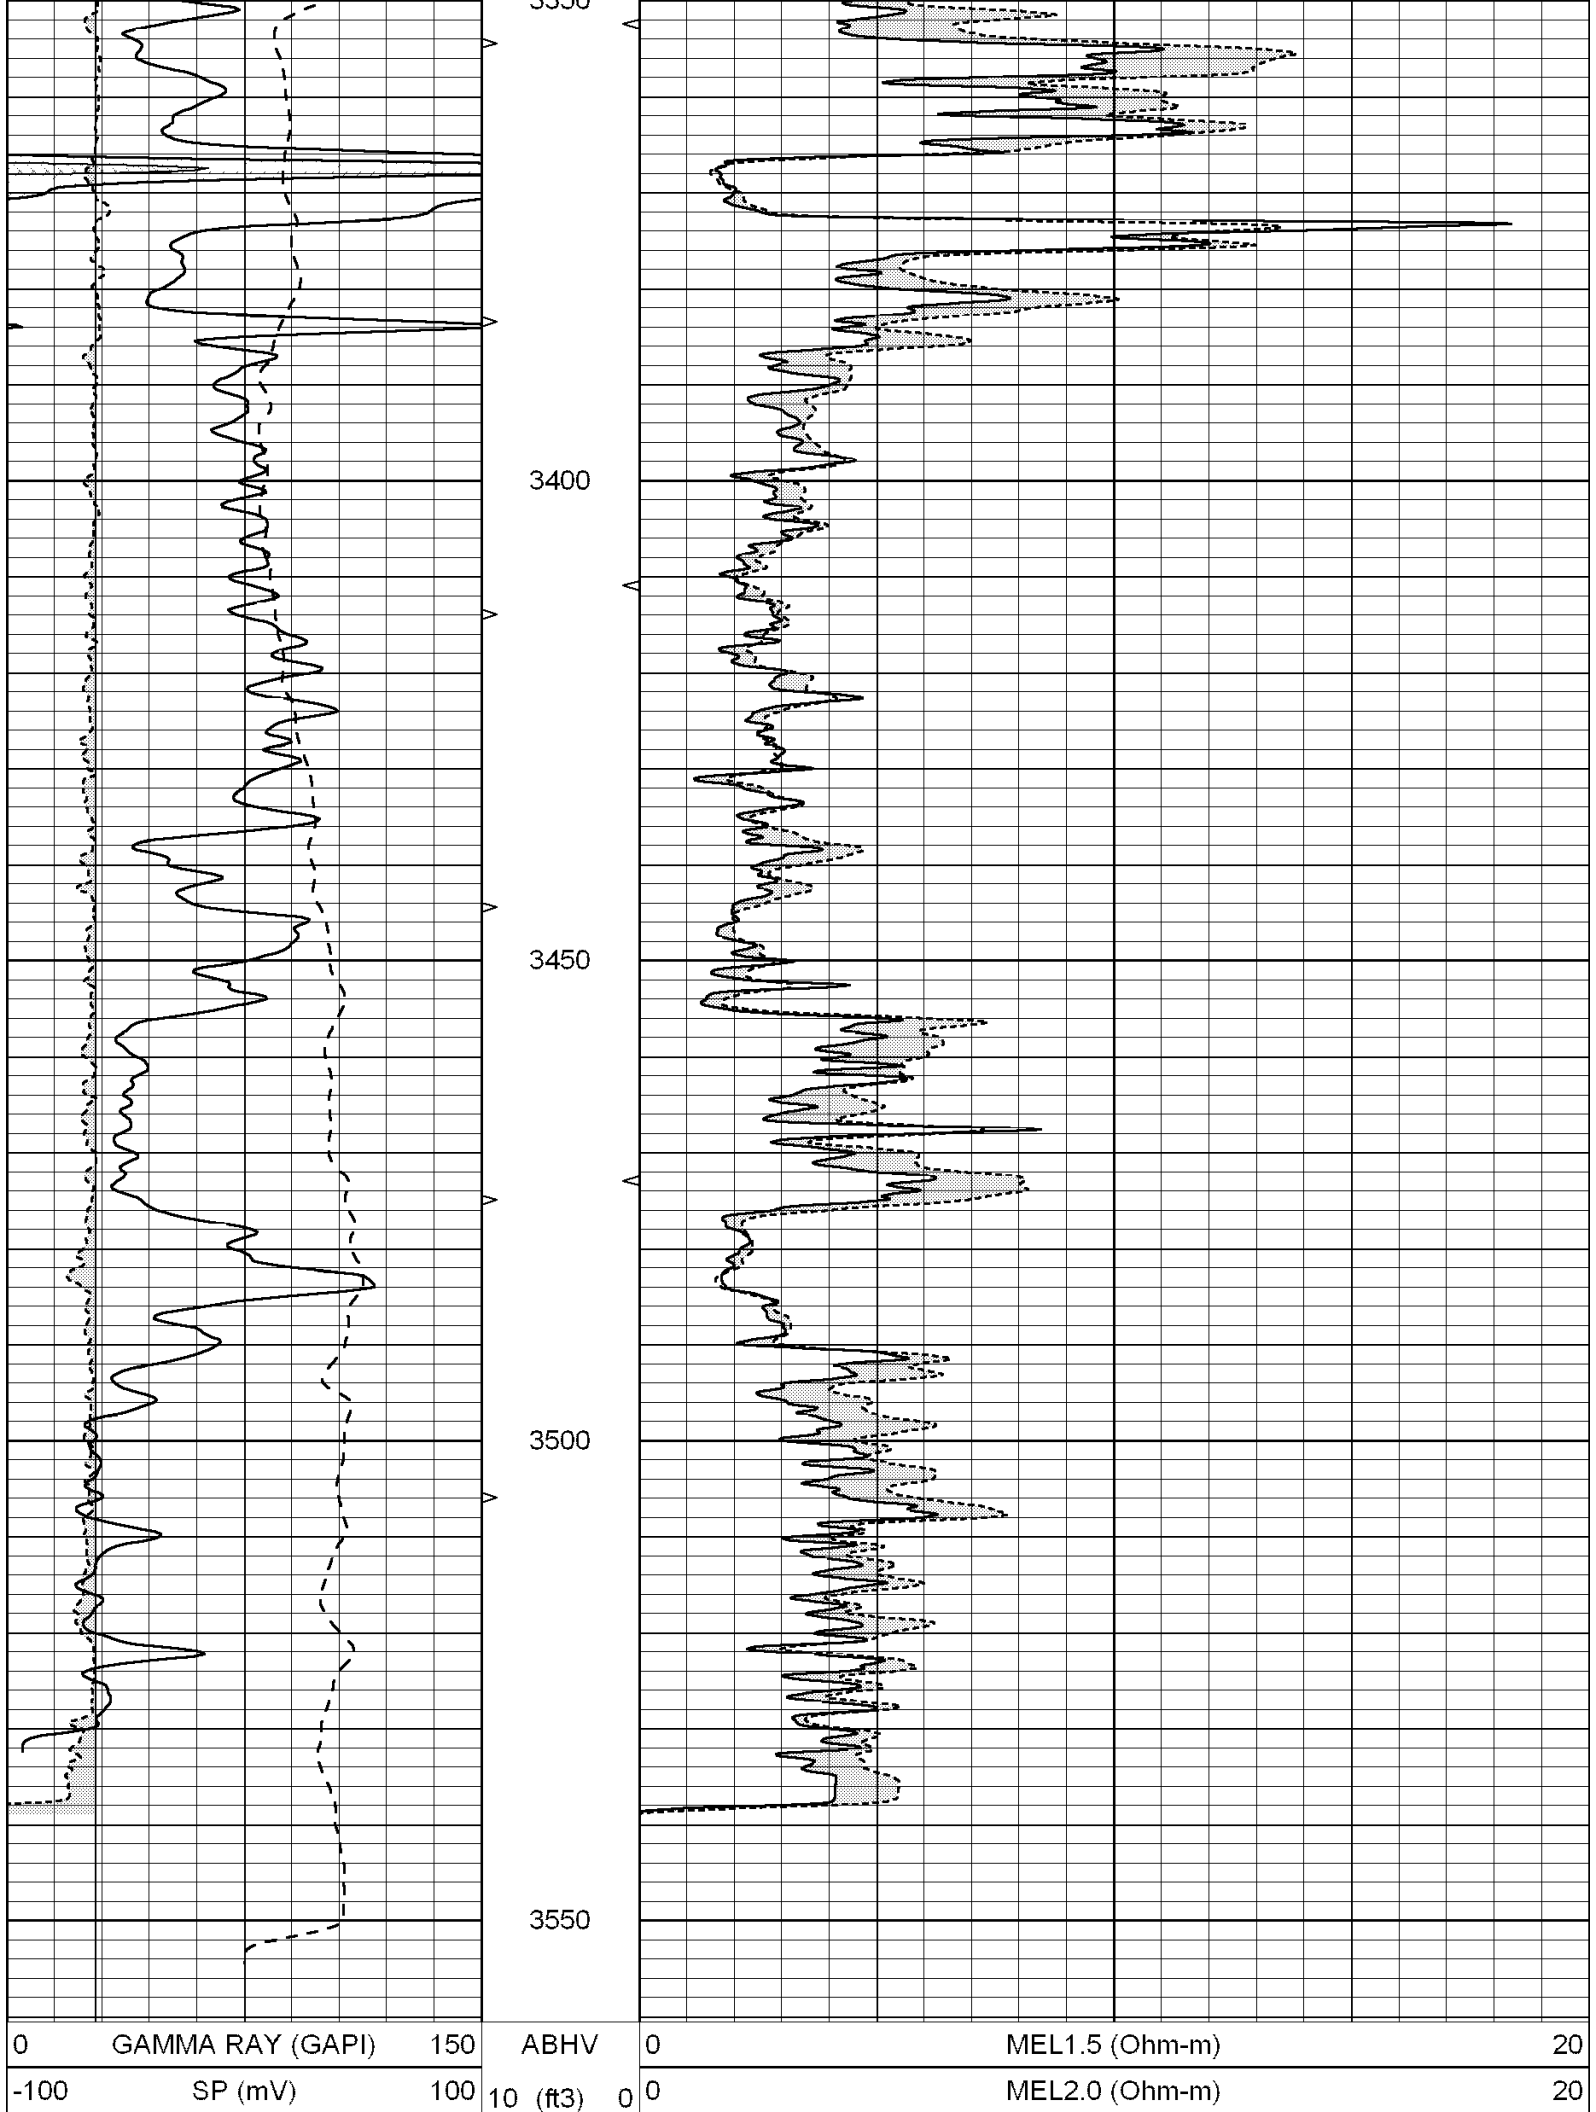

6	CALIPER (in)	16	TBHV	
			0 (ft3)	10

Calibration Report			
Database File:		001595pe.db	
Dataset Pathname:		pass6.6	
Dataset Creation:		Fri Jun 06 04:13:23 2008	
MICRO Calibration Report			
Serial Number:		MICRO5	
Tool Model:		PROBE	
Performed:		Fri Jun 06 02:47:42 2008	
Caliper Calibration:		Gain=2.206	Offset=-1.053
References		Low Cal	High Cal
Readings		7.200	15.000
		3.741	7.277
1.5" Calibration:		Gain=21.000	Offset=-0.100
References		Low Cal	High Cal
Readings		0.000	20.000
		0.025	0.991
2" Calibration:		Gain=29.500	Offset=-0.200
References		Low Cal	High Cal
Readings		0.000	20.000
		0.018	0.809
Gamma Ray Calibration Report			
Serial Number:		GR3	
Tool Model:		OPEN	
Performed:		Fri Jun 06 02:47:30 2008	
Calibrator Value:		200.0	GAPI
Background Reading:		3.0	cps
Calibrator Reading:		186.0	cps
Sensitivity:		0.9500	GAPI/cps