



SUPERIOR
Hays,
Kansas

MICRO LOG

Company	LARIO OIL & GAS COMPANY		
Well	KREBS CREDIT SHELTER #1-36		
Field	WILDCAT		
County	LOGAN		
State	KANSAS		
Location:	API #: 15-109-20876 2003' FNL & 1353' FEL		Other Services CDL/CNL/PE DIL/SONIC
SEC 36 TWP 14S RGE 32W			Elevation
Permanent Datum	GROUND LEVEL	Elevation	2664
Log Measured From	KELLY BUSHING 5' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	2-4-10		
Run Number	TWO		
Depth Driller	4414		
Depth Logger	4412		
Bottom Logged Interval	4395		
Top Log Interval	3200		
Casing Driller	263		
Casing Logger	NA		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.2 / 53		
pH / Fluid Loss	10.0 / 8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.70 @ 80F		
Rinf @ Meas. Temp	0.53 @ 80F		
Rmc @ Meas. Temp	0.84 @ 80F		
Source of Rinf / Rmc	FLOWLINE		
Rim @ BHT	.470 @ 119F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	10:45 P.M.		
Maximum Recorded Temperature	119F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	VERN SCHRAG		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SUPERIOR WELL SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: OAKLEY, 22S, INTO AT STEEL GATE, 2E.




SUPERIOR
Hays,
Kansas


MAIN SECTION

Database File: 004793pdn.db
Dataset Pathname: pass5
Presentation Format: micro
Dataset Creation: Thu Feb 04 01:11:41 2010 by Log Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	20

TBHV
0 (ft3) 10

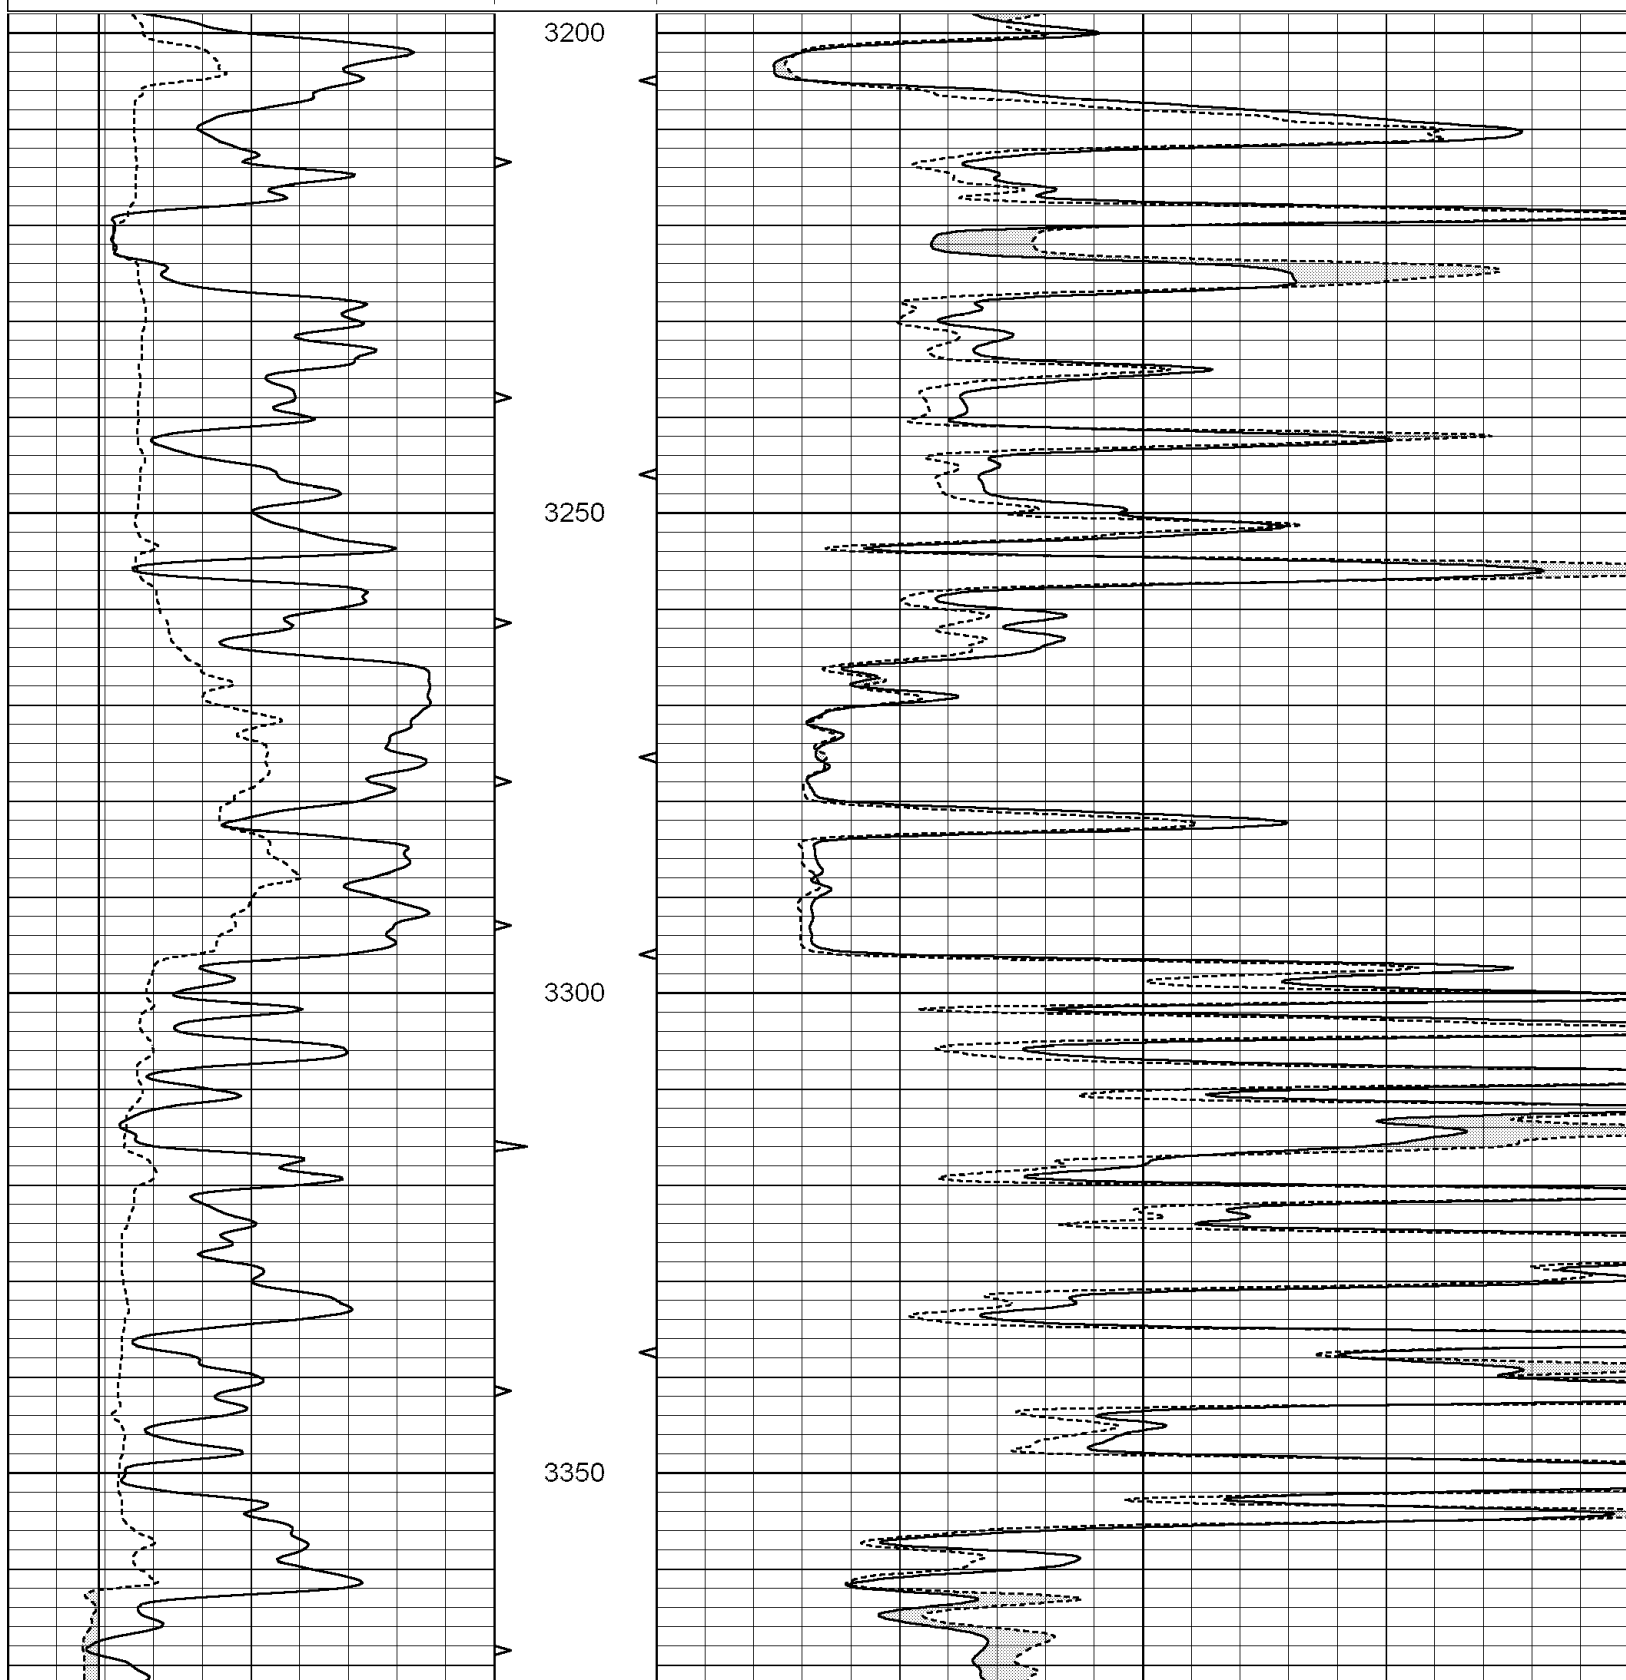

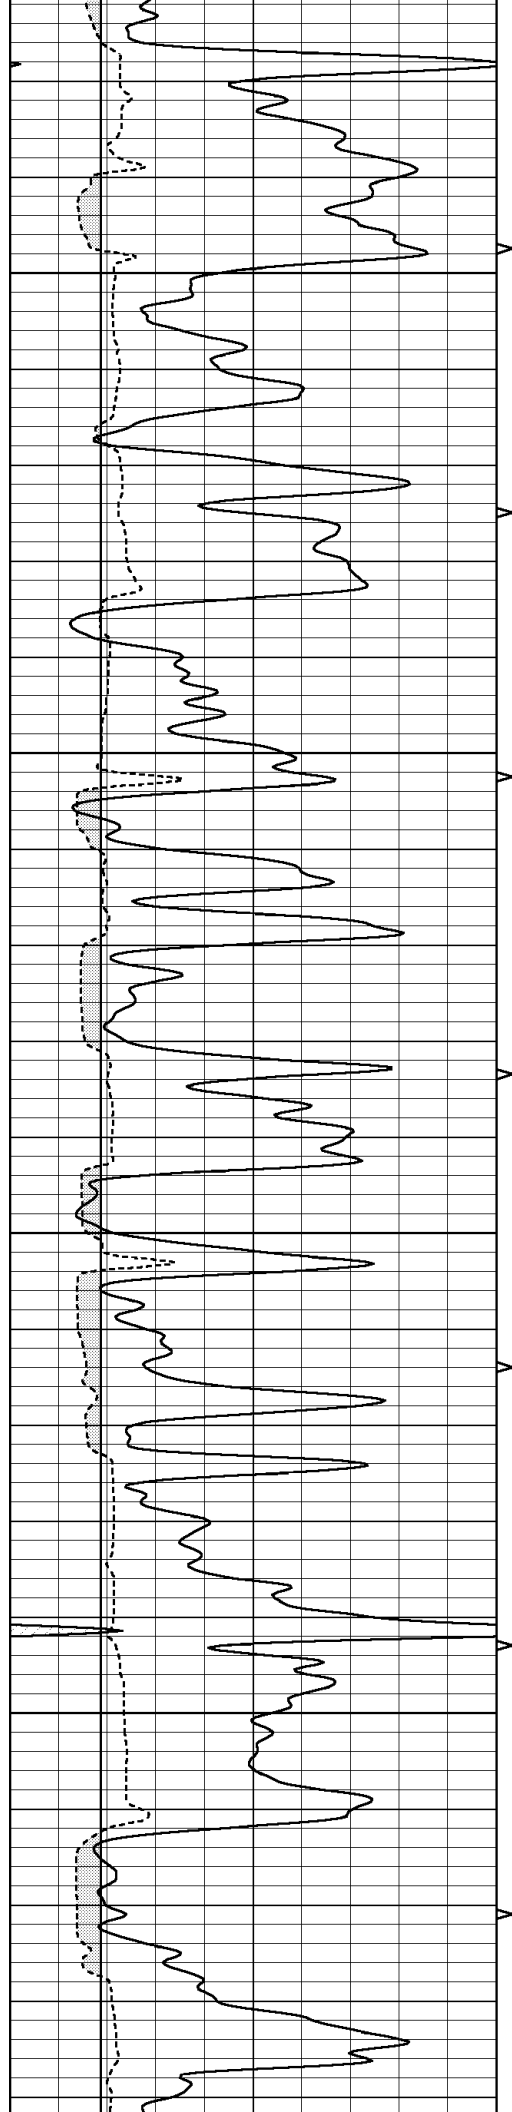



3400


3450



3500


3550

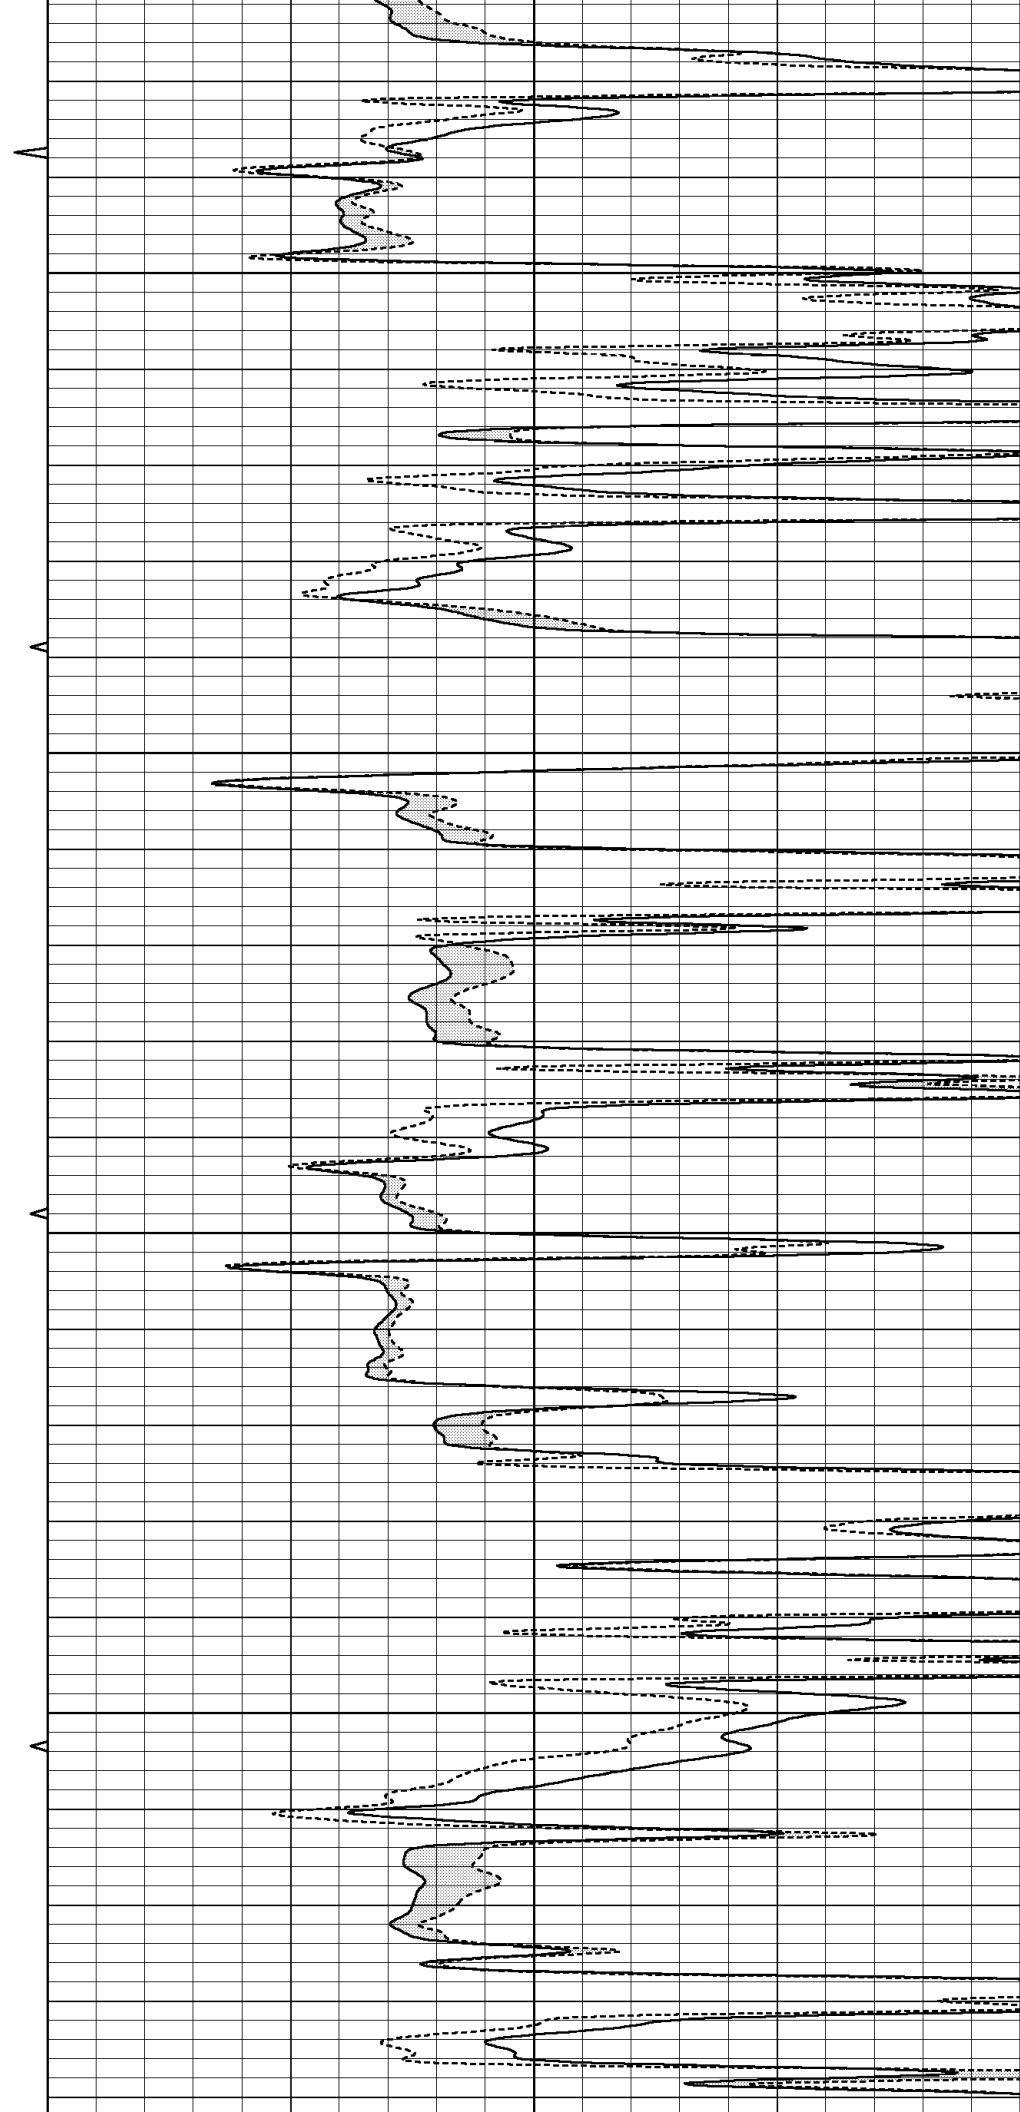

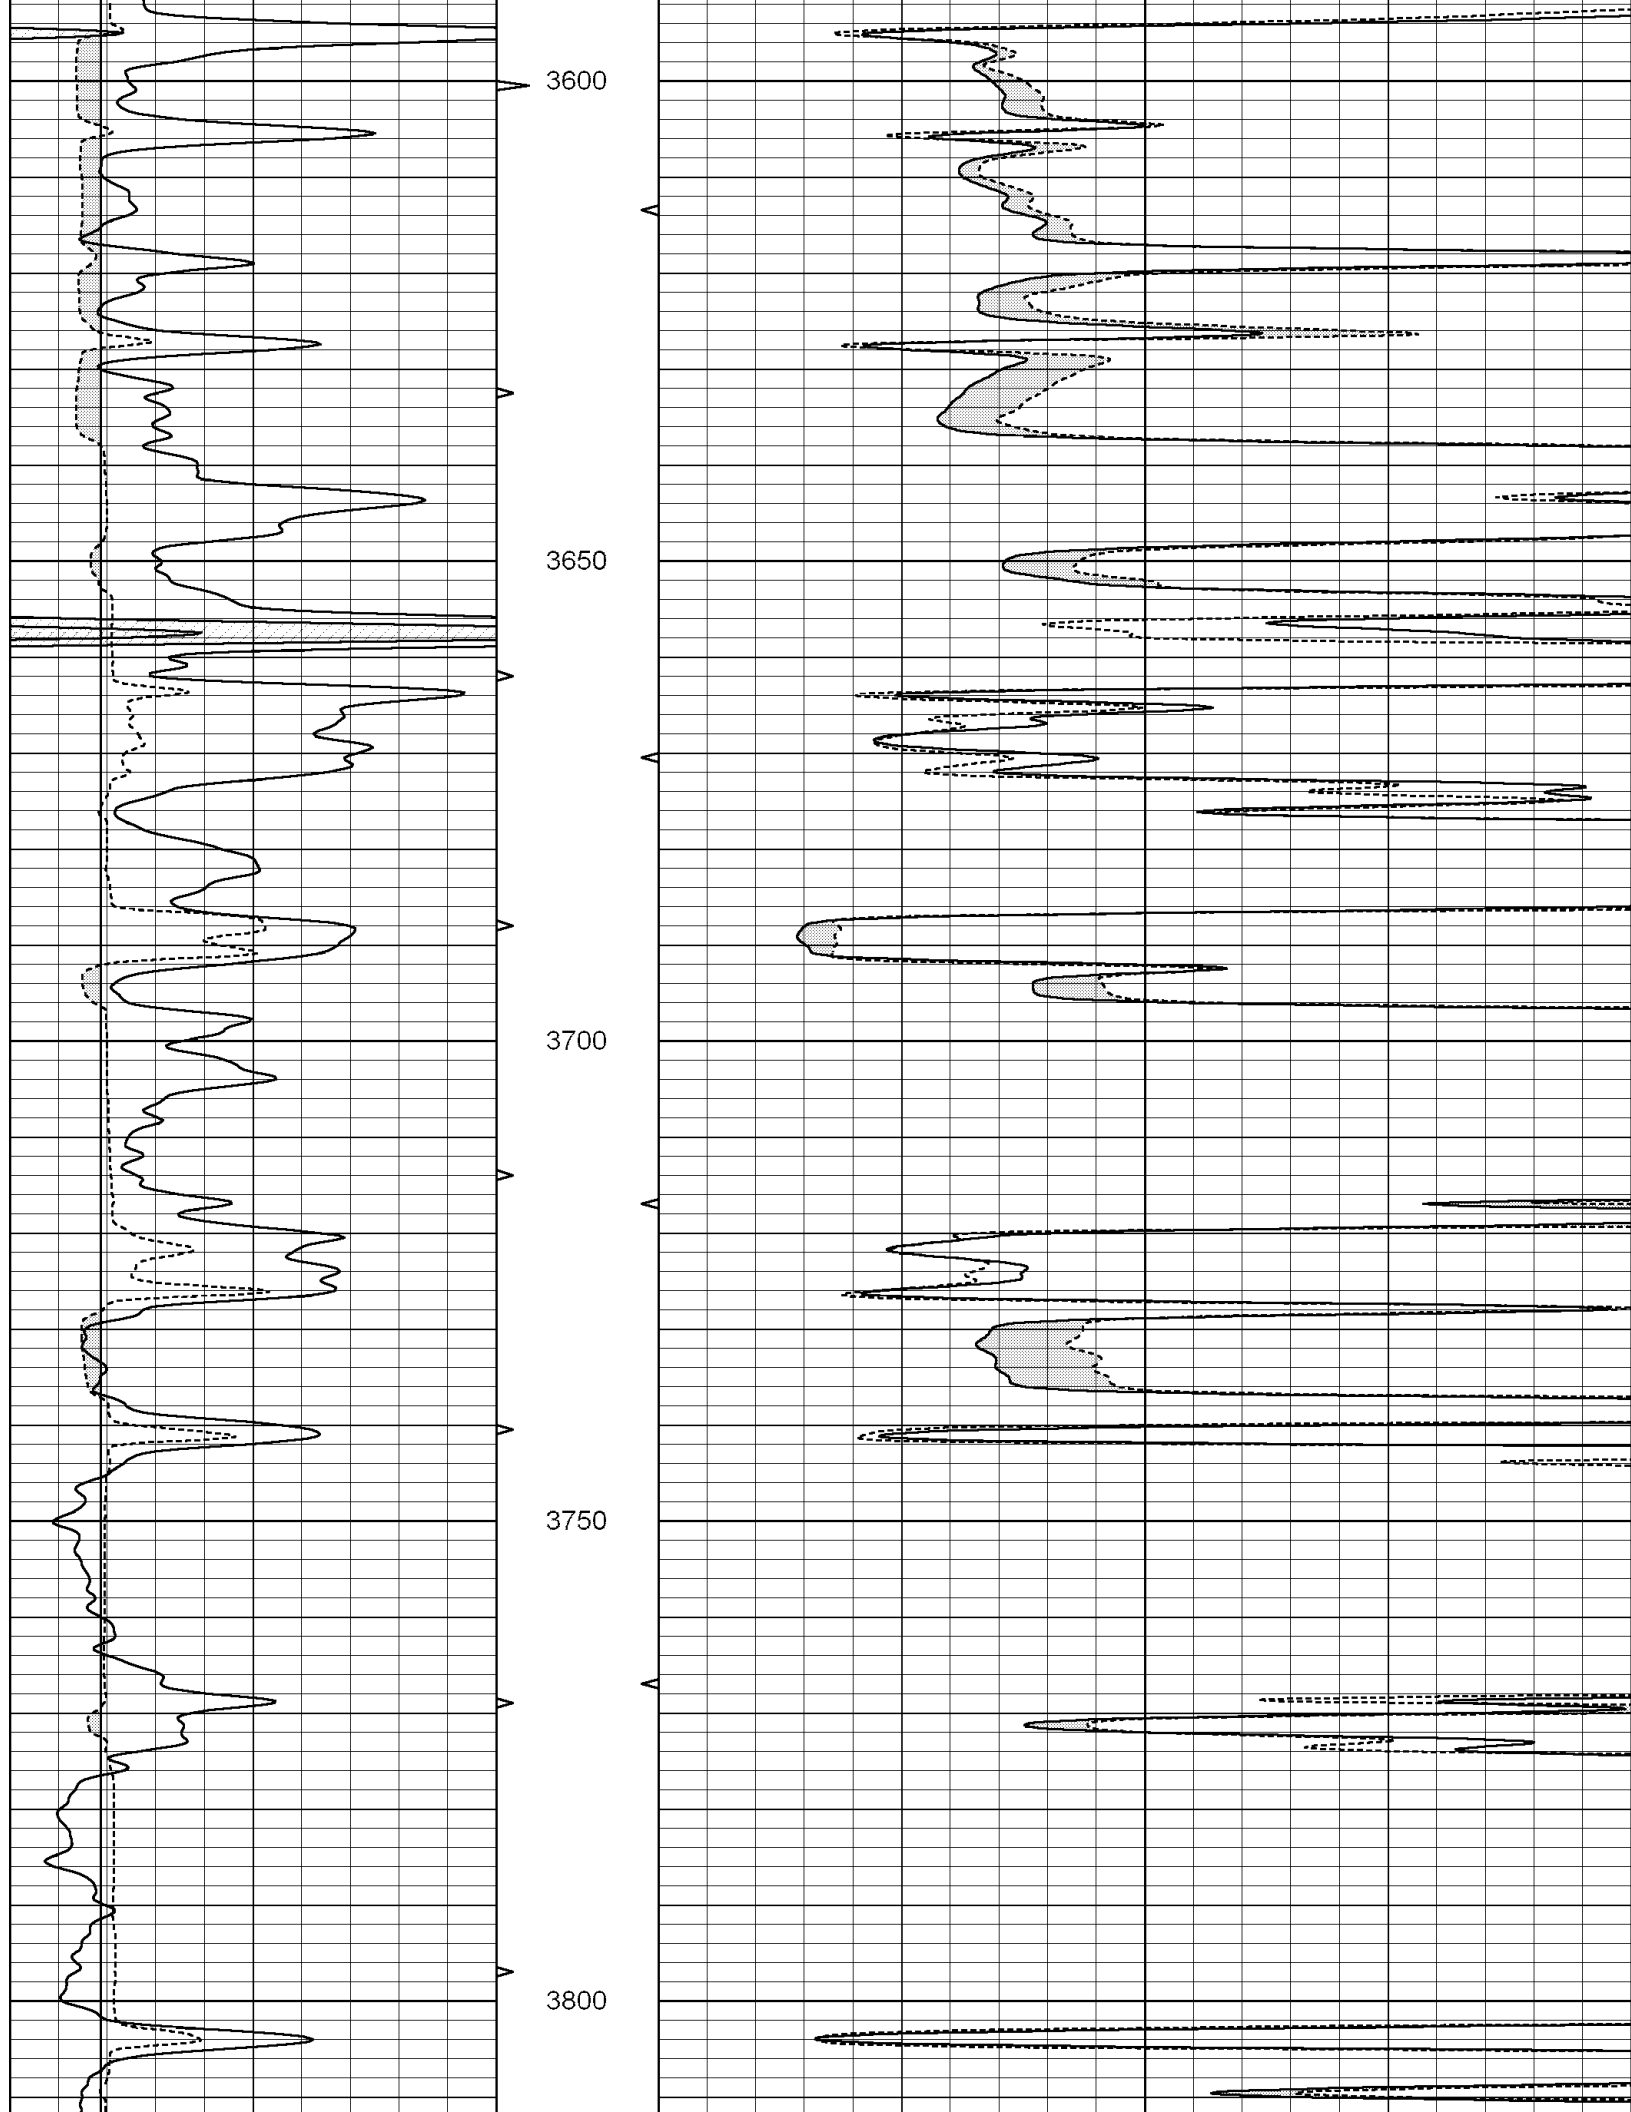


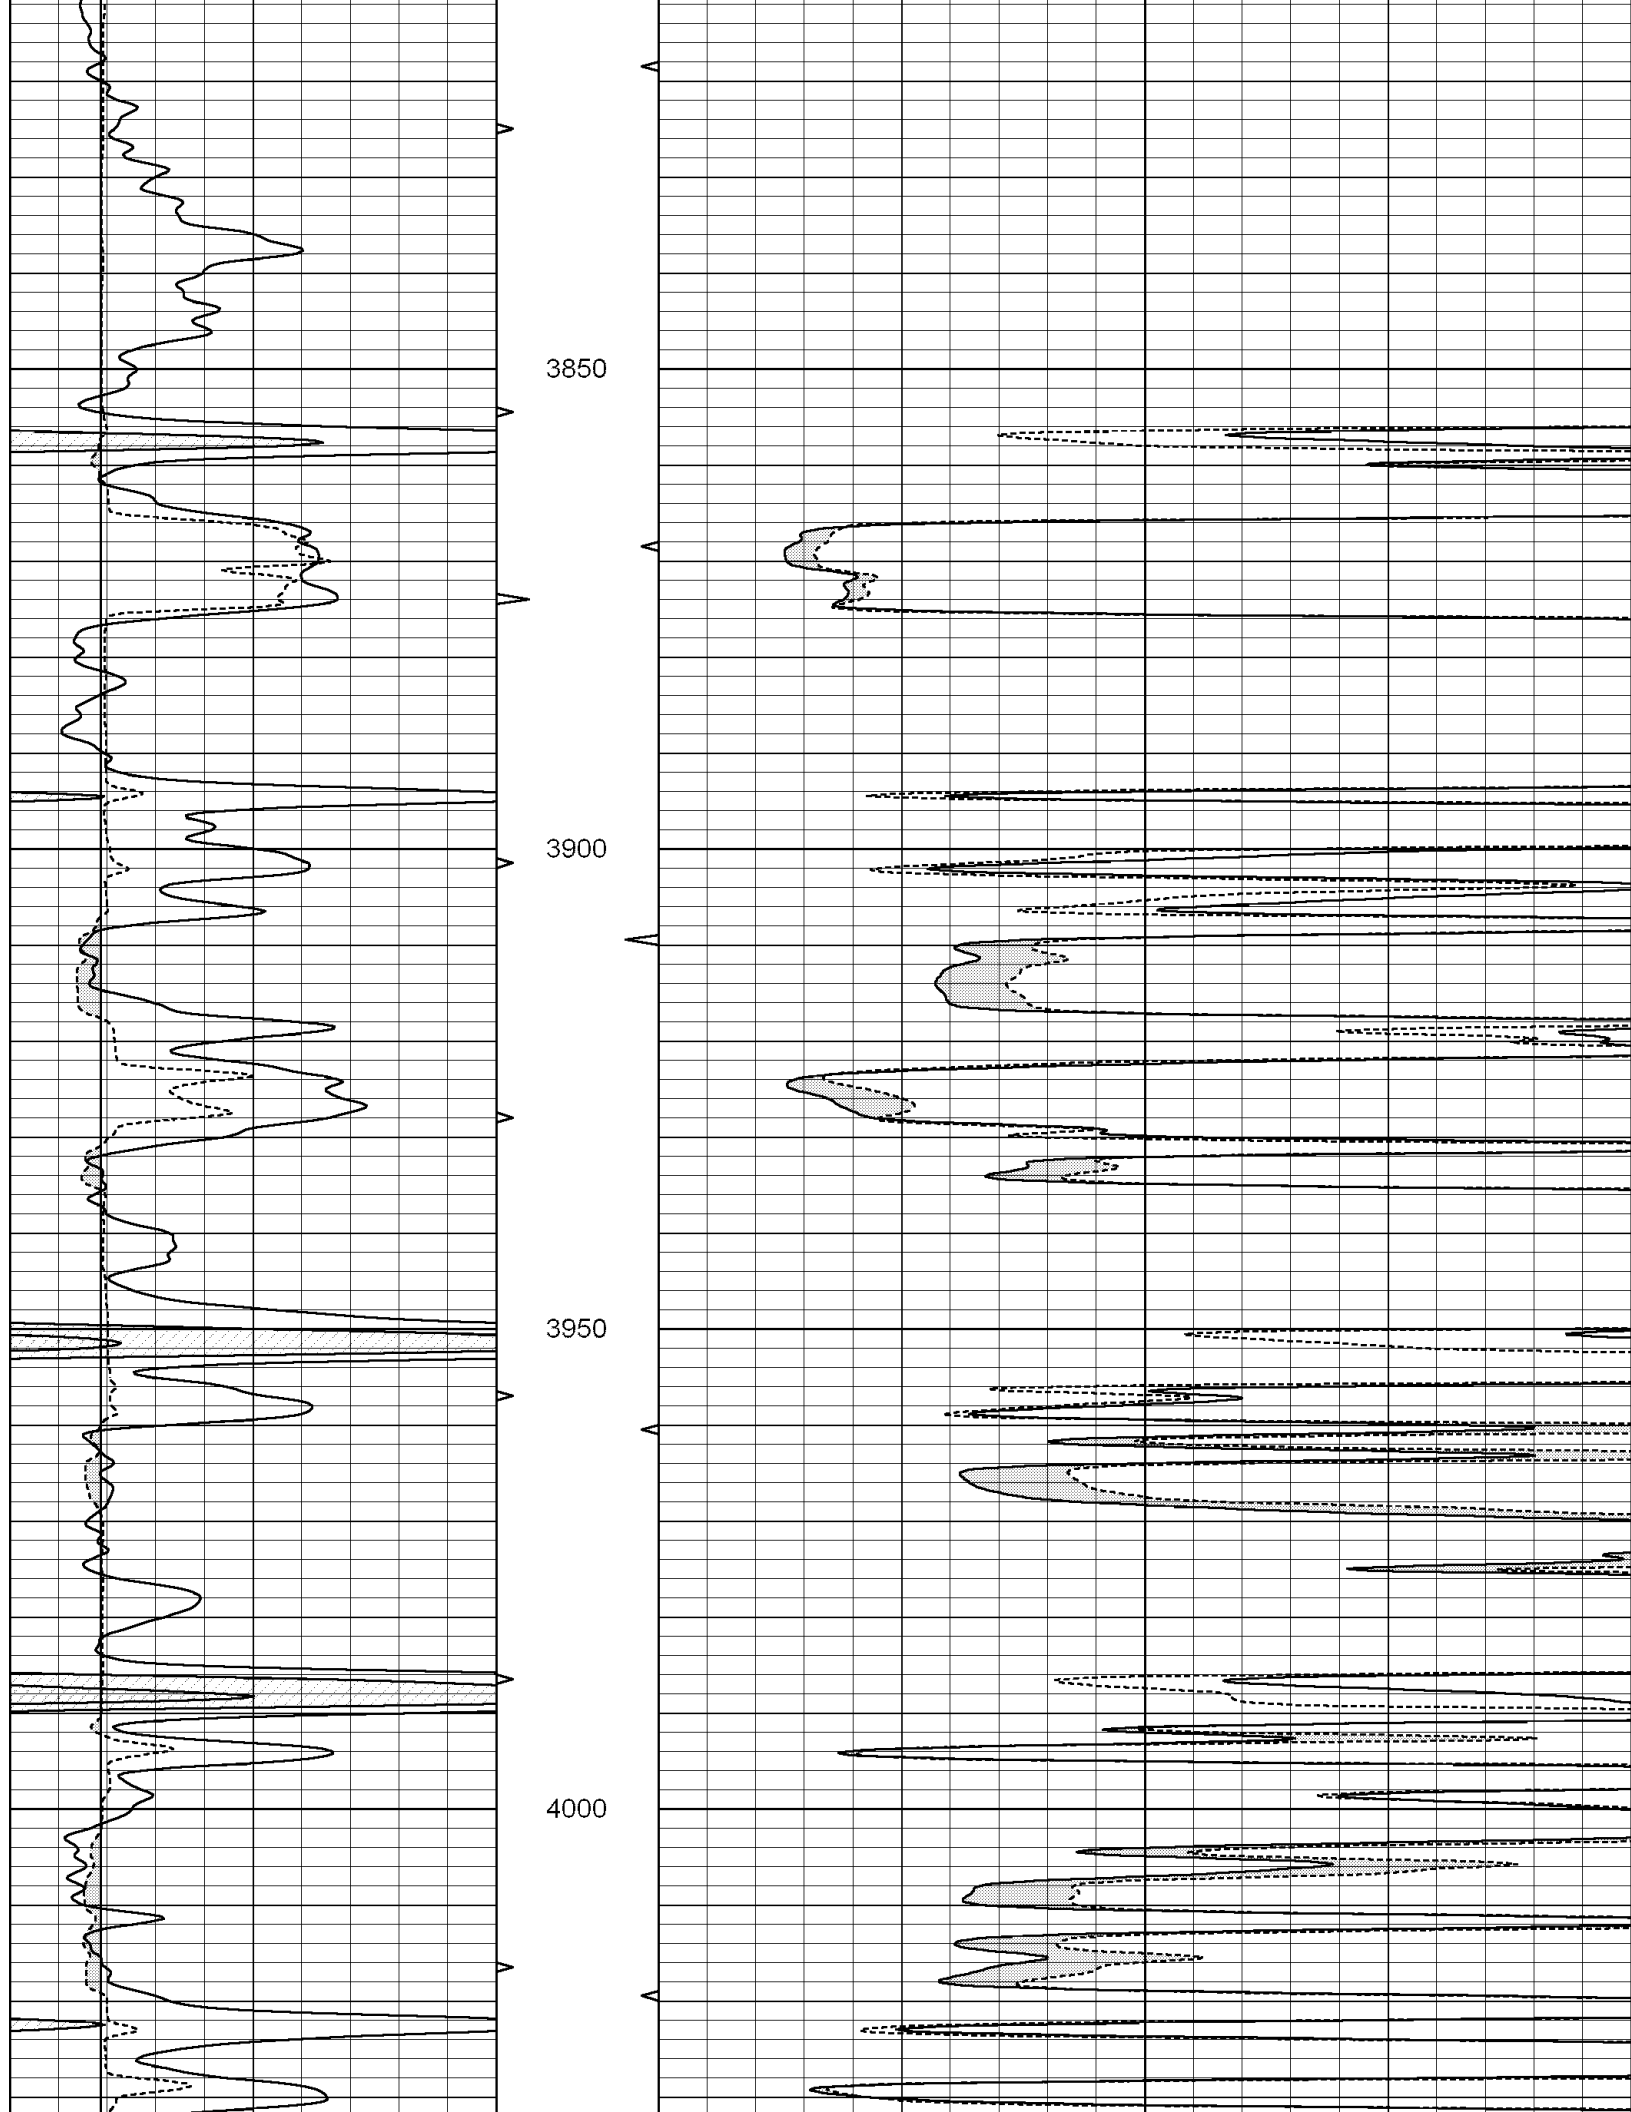


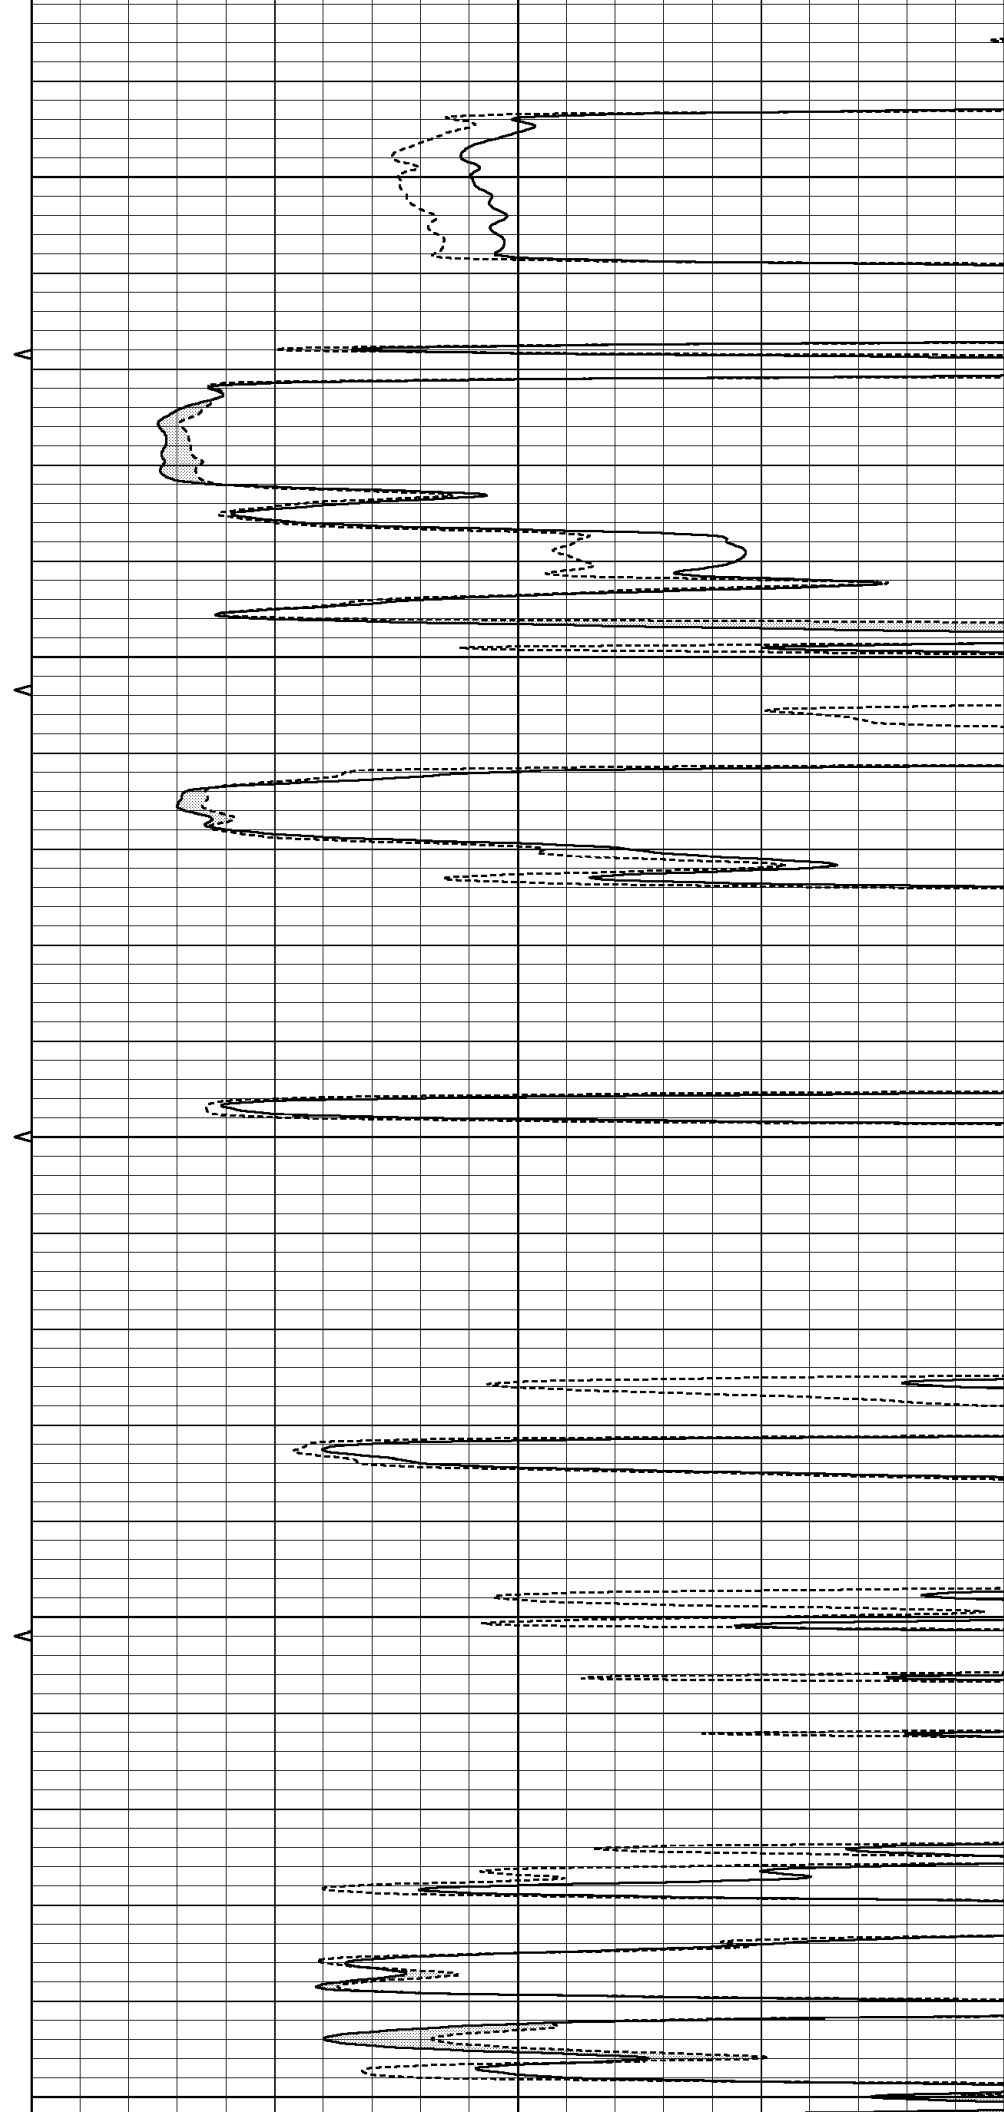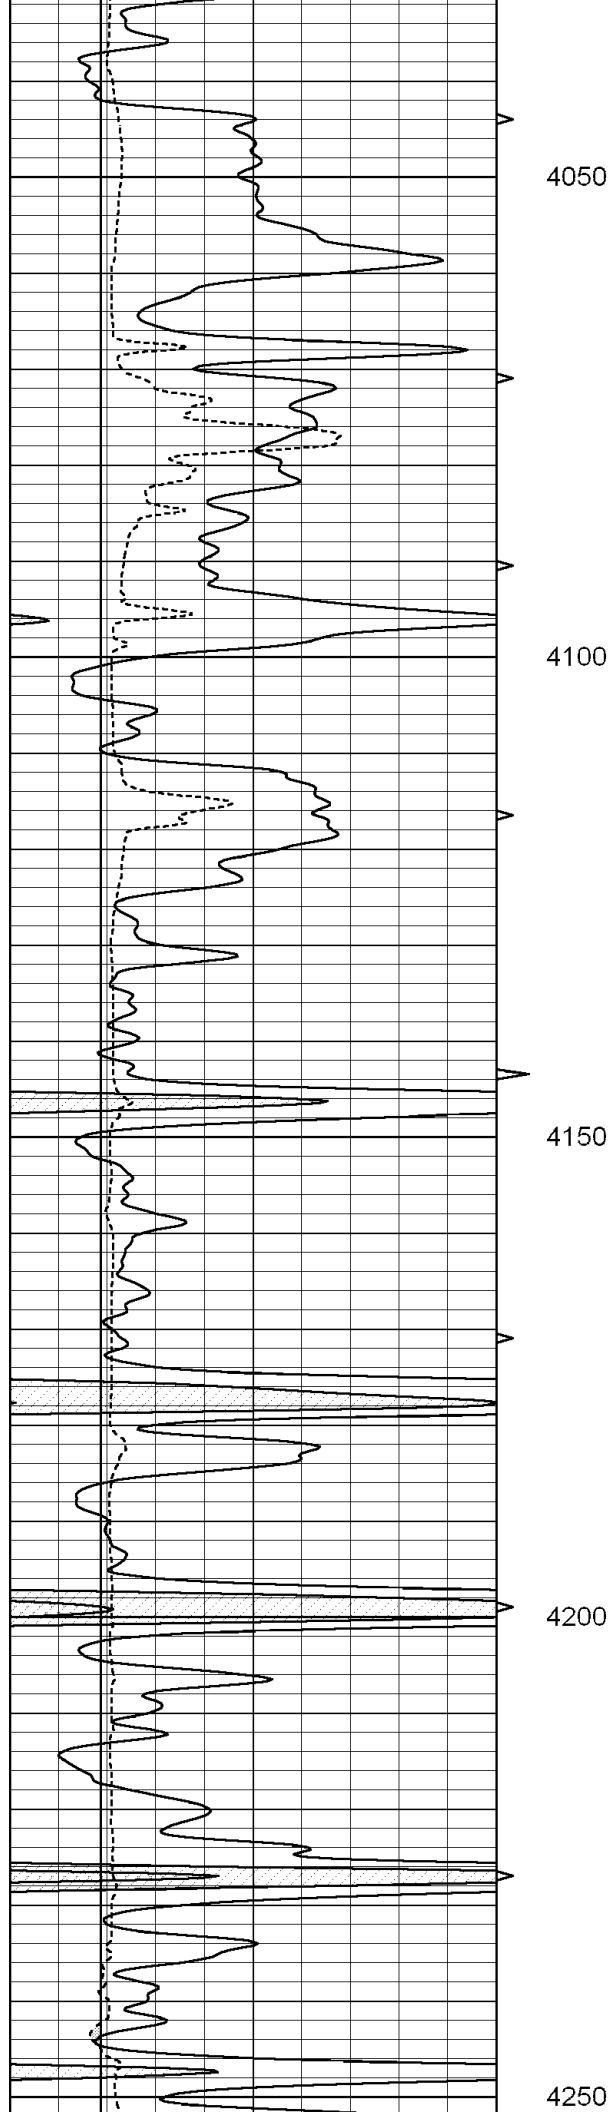

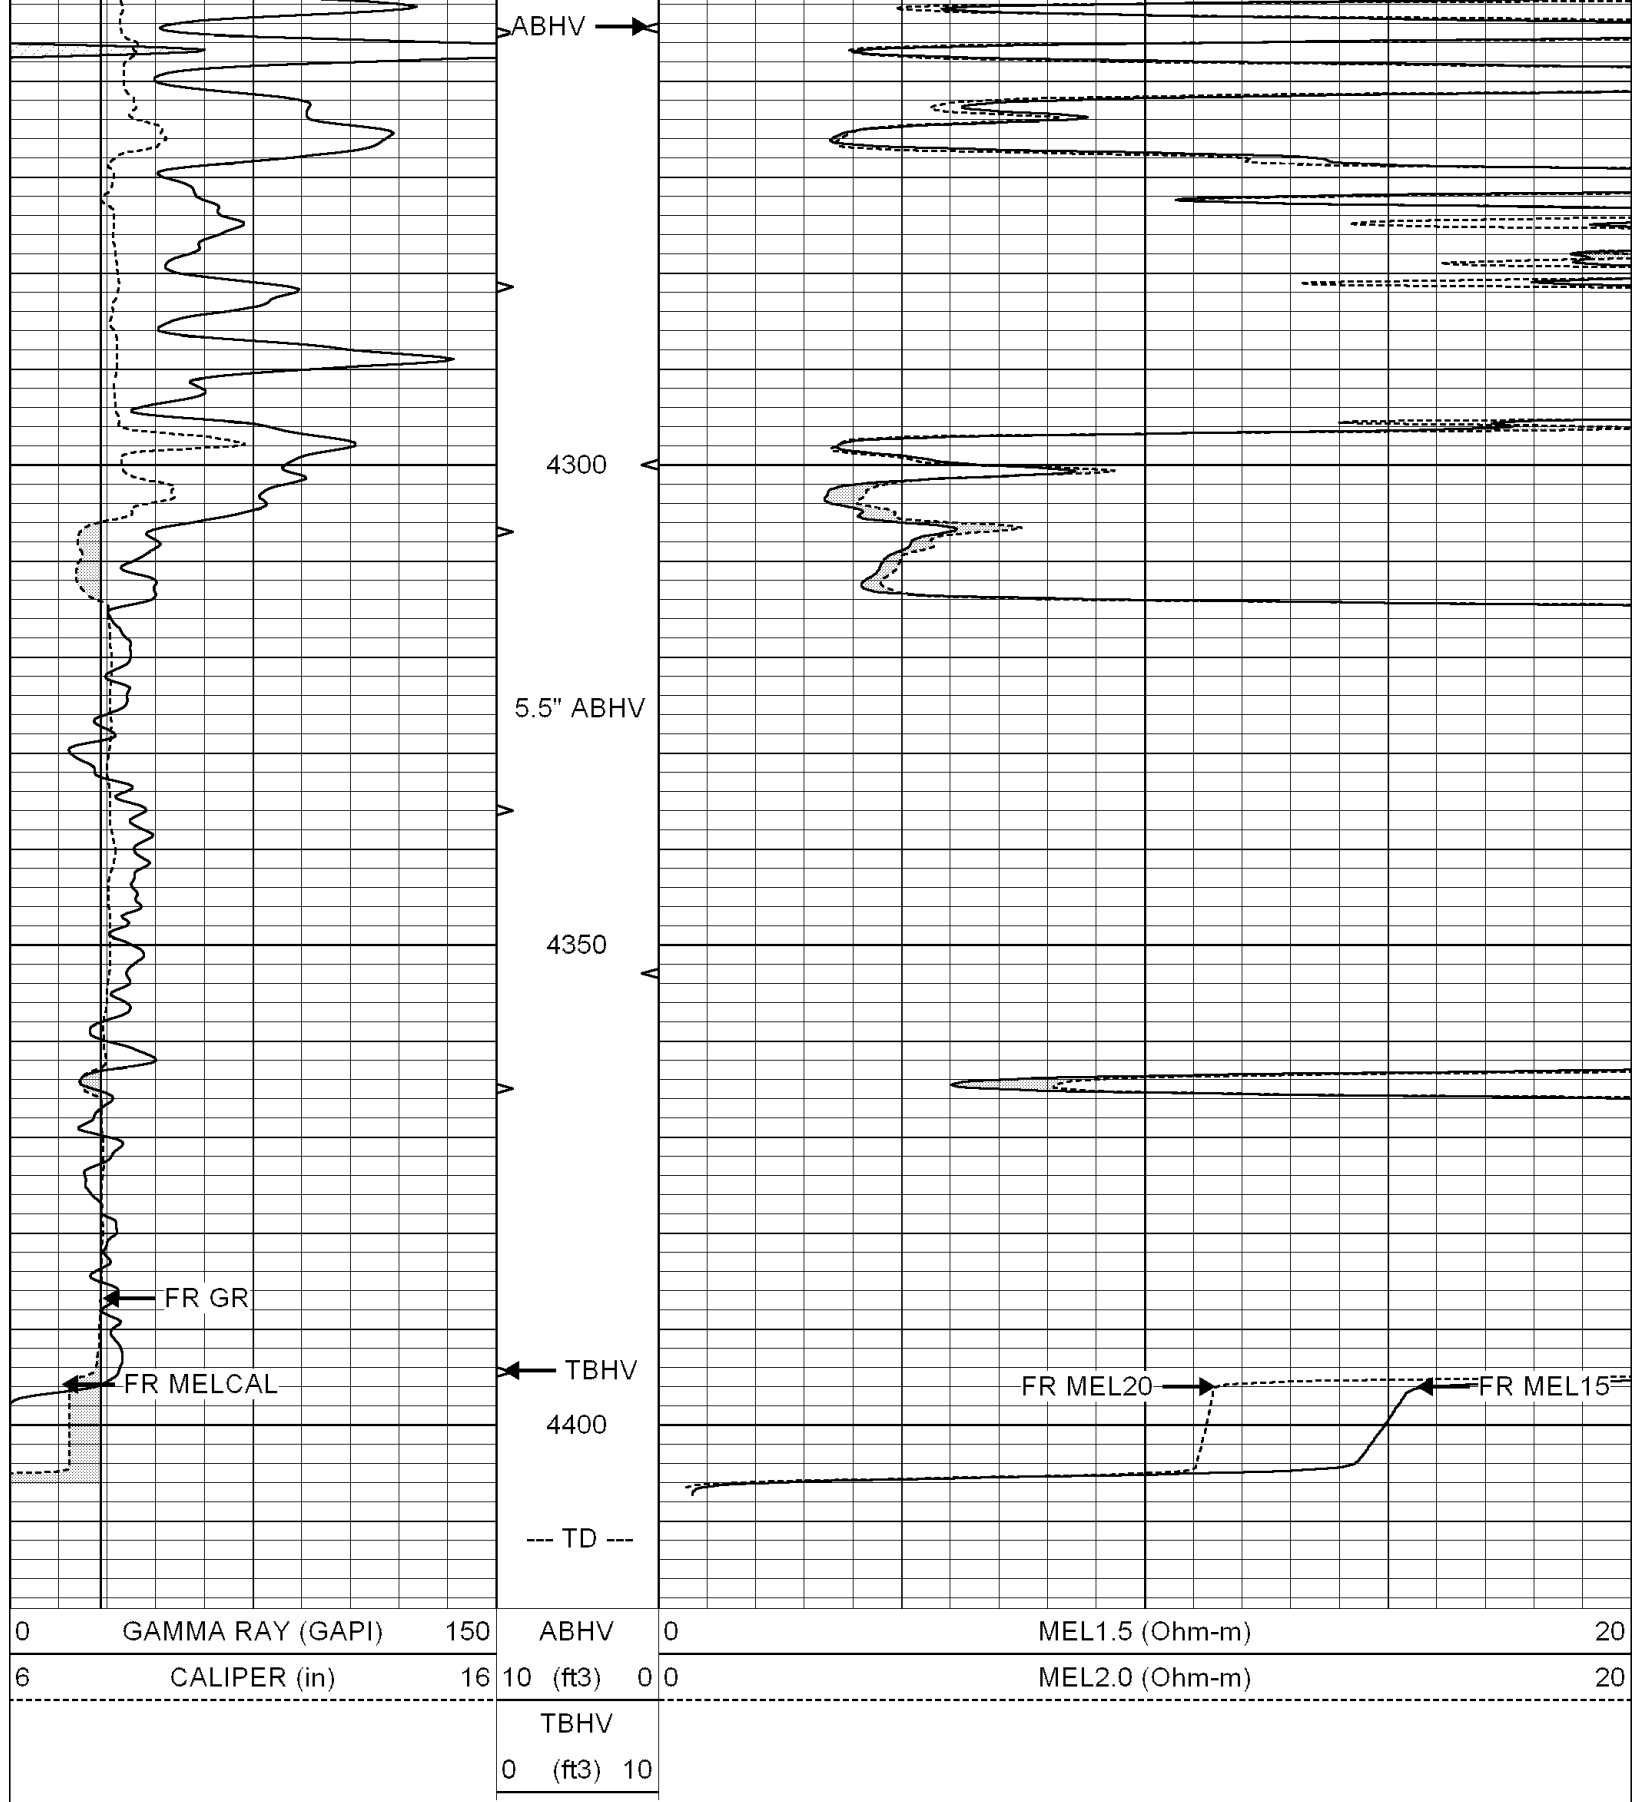

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3) 10			

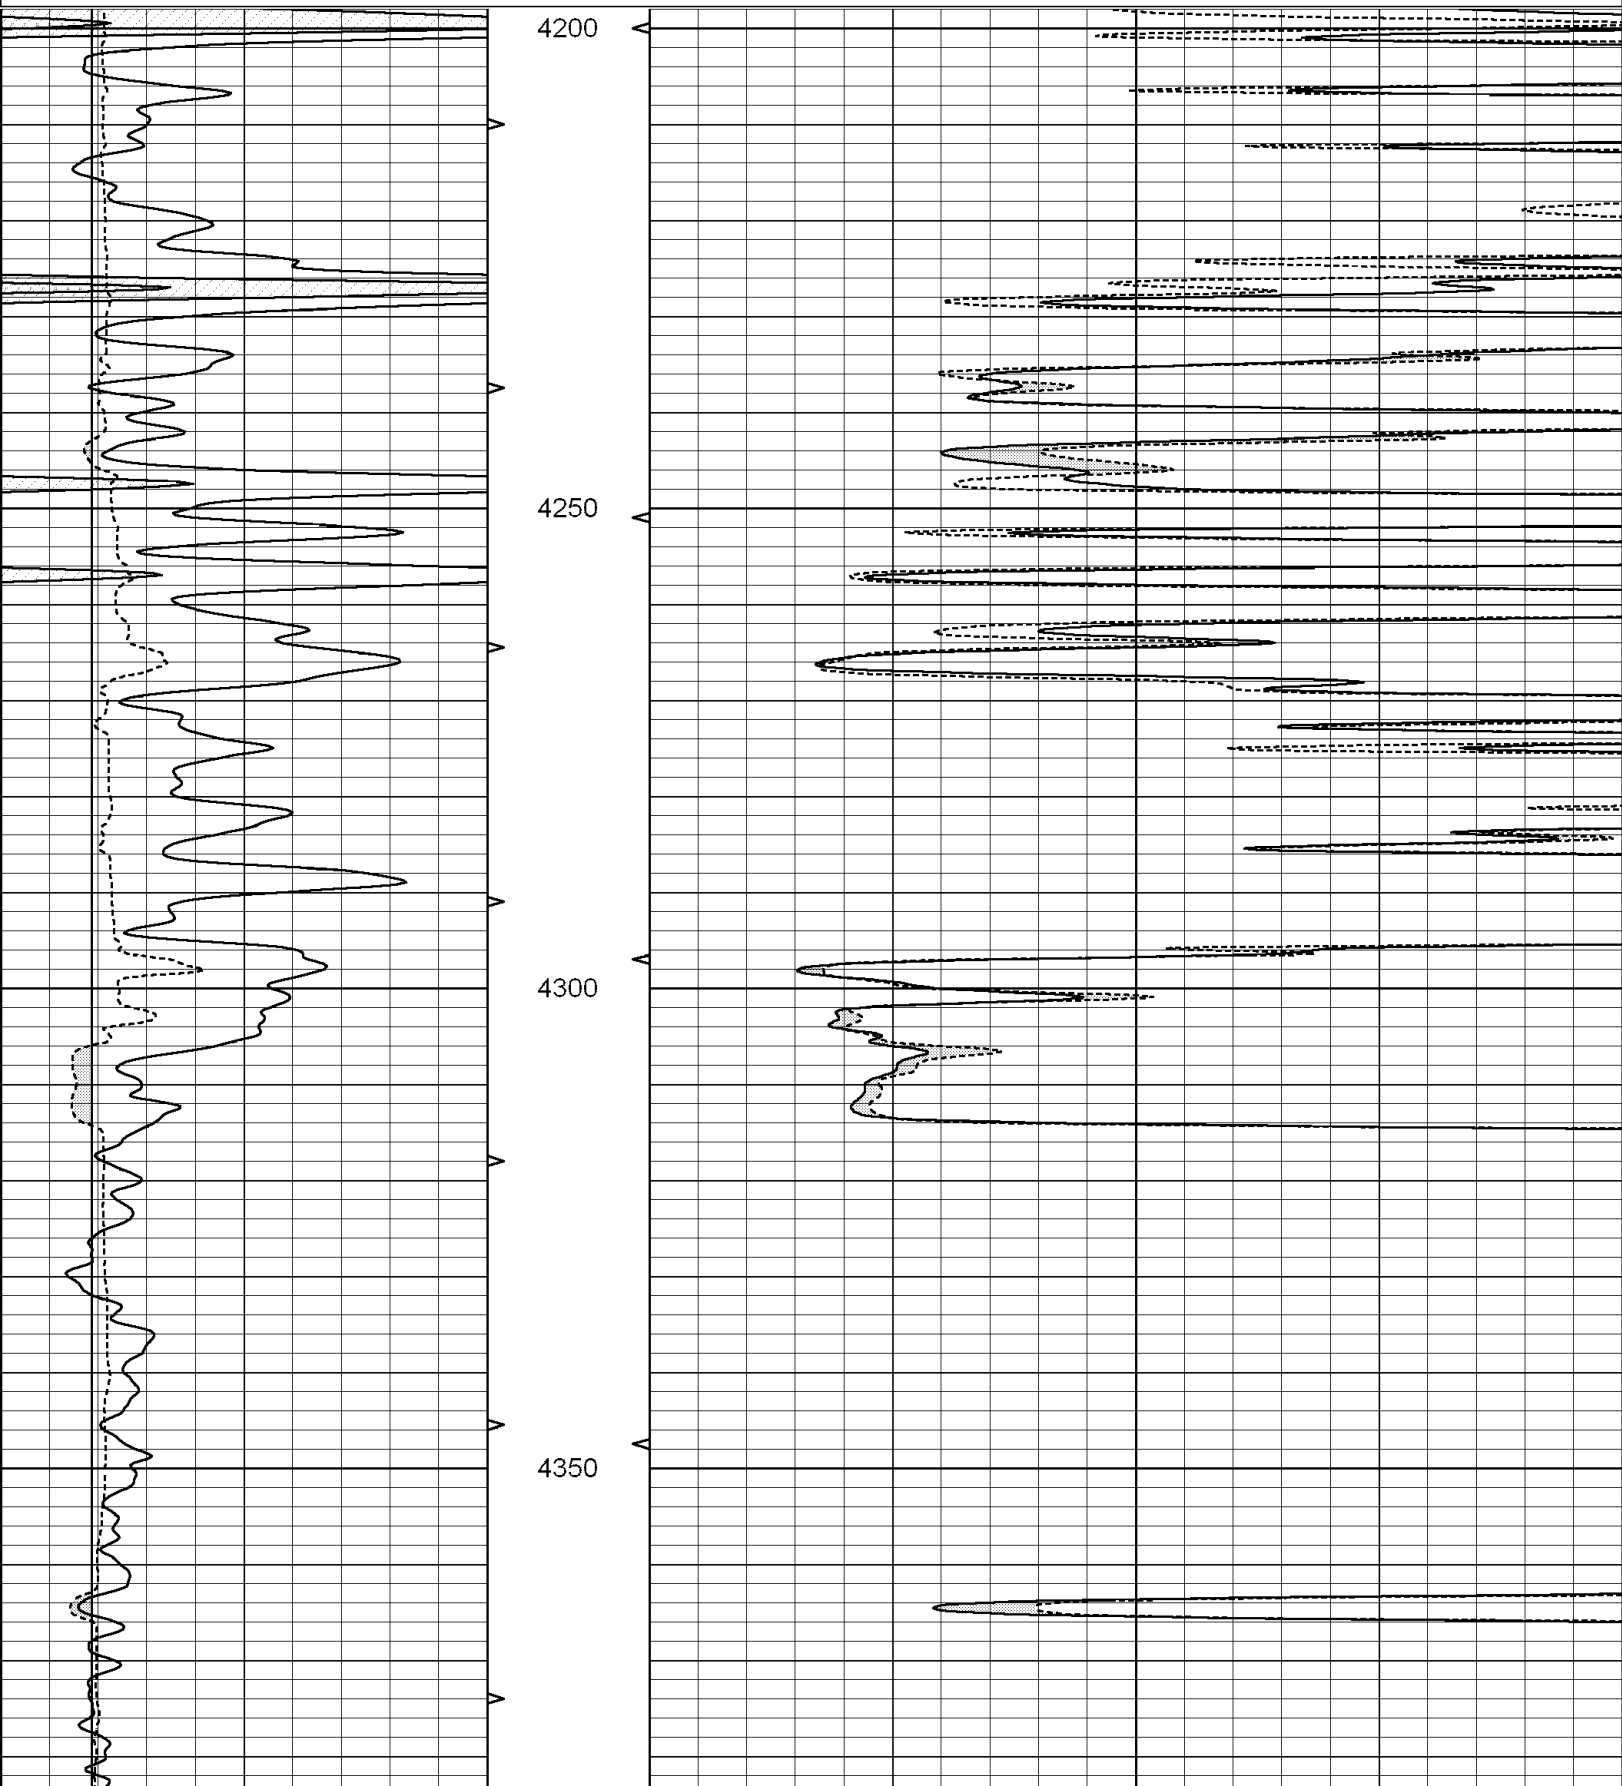

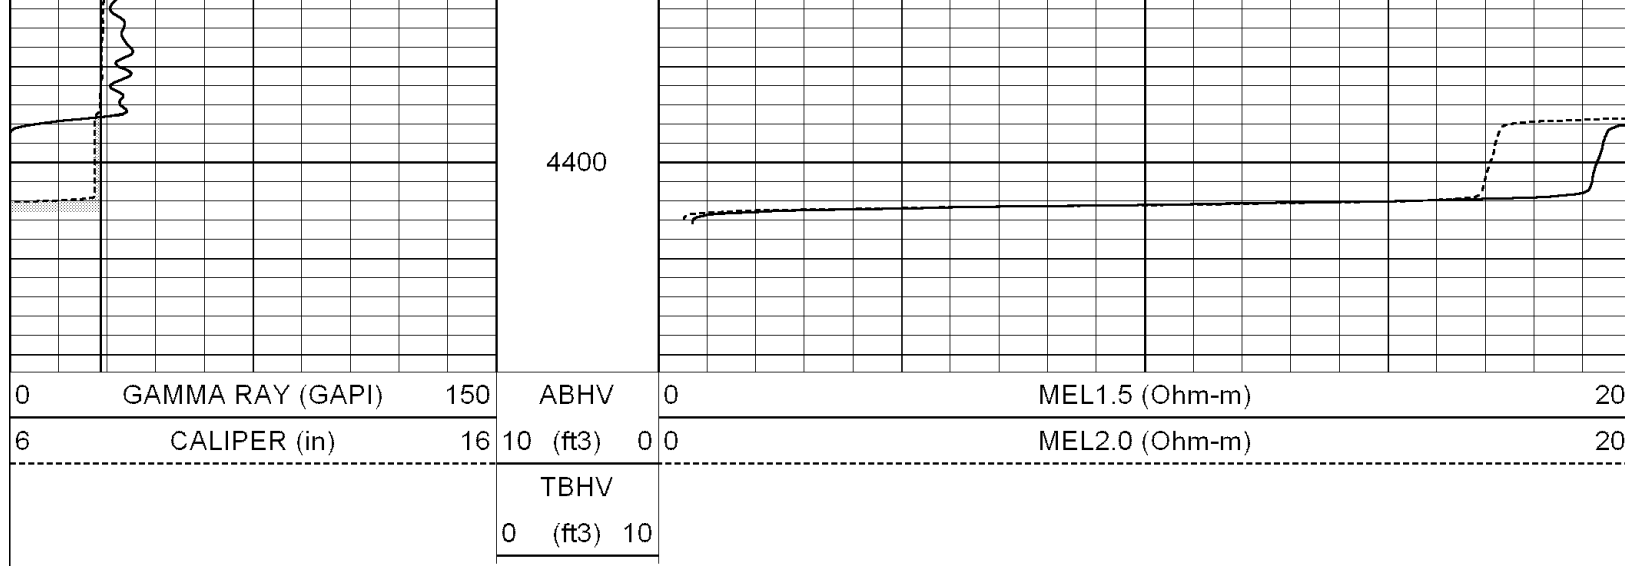

Calibration Report			
Database File:	004793pdn.db		
Dataset Pathname:	pass5		
Dataset Creation:	Thu Feb 04 01:11:41 2010 by Log Open-Cased 090629		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Thu Feb 04 01:00:58 2010		
Caliper Calibration:	Gain=3.567	Offset=-2.138	
References	Low Cal	High Cal	
Readings	7.500	14.000	
	2.702	4.525	
1.5" Calibration:	Gain=56.000	Offset=0.700	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	
2" Calibration:	Gain=42.000	Offset=0.526	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.021	0.810	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Tue Feb 02 10:33:27 2010		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.6000	GAPI/cps	