



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Maralex Resources, Inc.	
15-179-21274-00-00		Well Slipke No. 25-1	
Location		Field Allodium	
County Sheridan		State Kansas	
Sec: 25	Twp: 6 S	Rge: 26 W	
Permanent Datum Ground Level		Elevation 2612	
Log Measured From Kelly Bushing		8 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing		K.B. 2620 D.F. 2612 G.L. 2612	
Date	1/8/2010		
Run Number	Two		
Depth Driller	4588		
Depth Logger	4582		
Bottom Logged Interval	4581		
Top Log Interval	3100		
Casing Driller	8.625 @ 345		
Casing Logger	348		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	1200		
Density / Viscosity	9.4 43		
pH / Fluid Loss	9.5 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.60 @ 50		
Rmf @ Meas. Temp	1.20 @ 50		
Rmc @ Meas. Temp	2.16 @ 50		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.66 @ 122		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	122		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Christie Reid		
John Rundel			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Studley, Ks; East edge of town;
10-1/4 North; West Into

0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
6	Bit Size (in)	16
-200	sp (mV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0
		LSPD (ft/min)

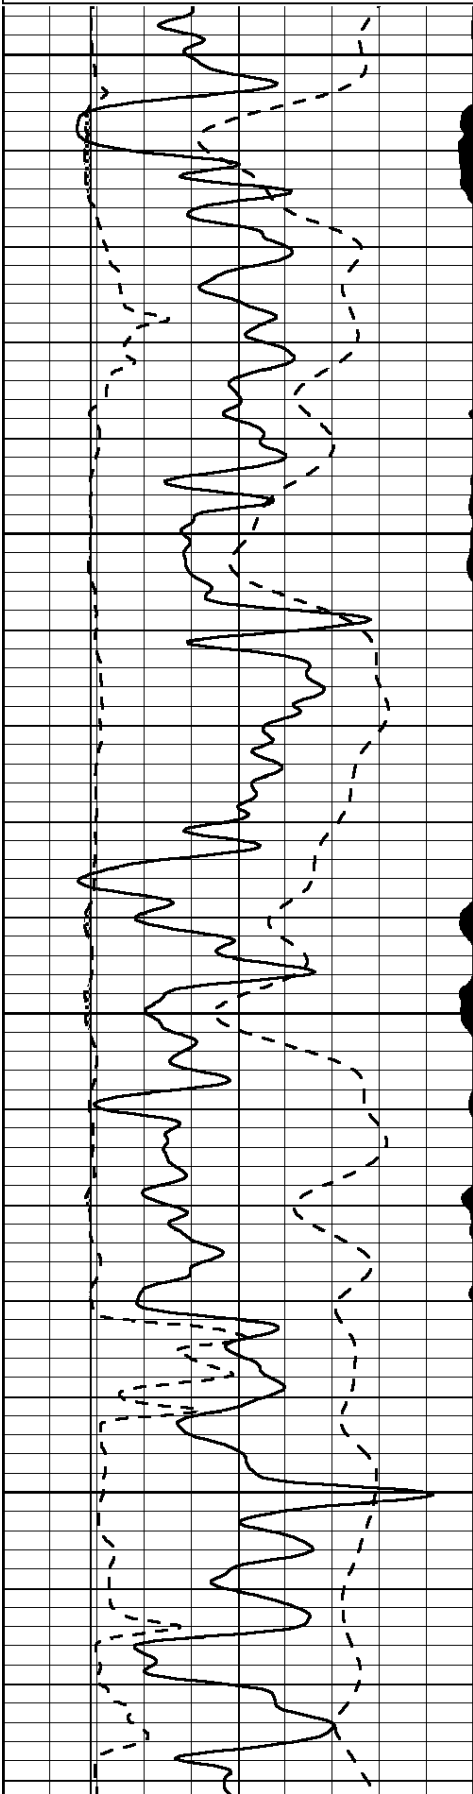


3100

3150

3200

3250

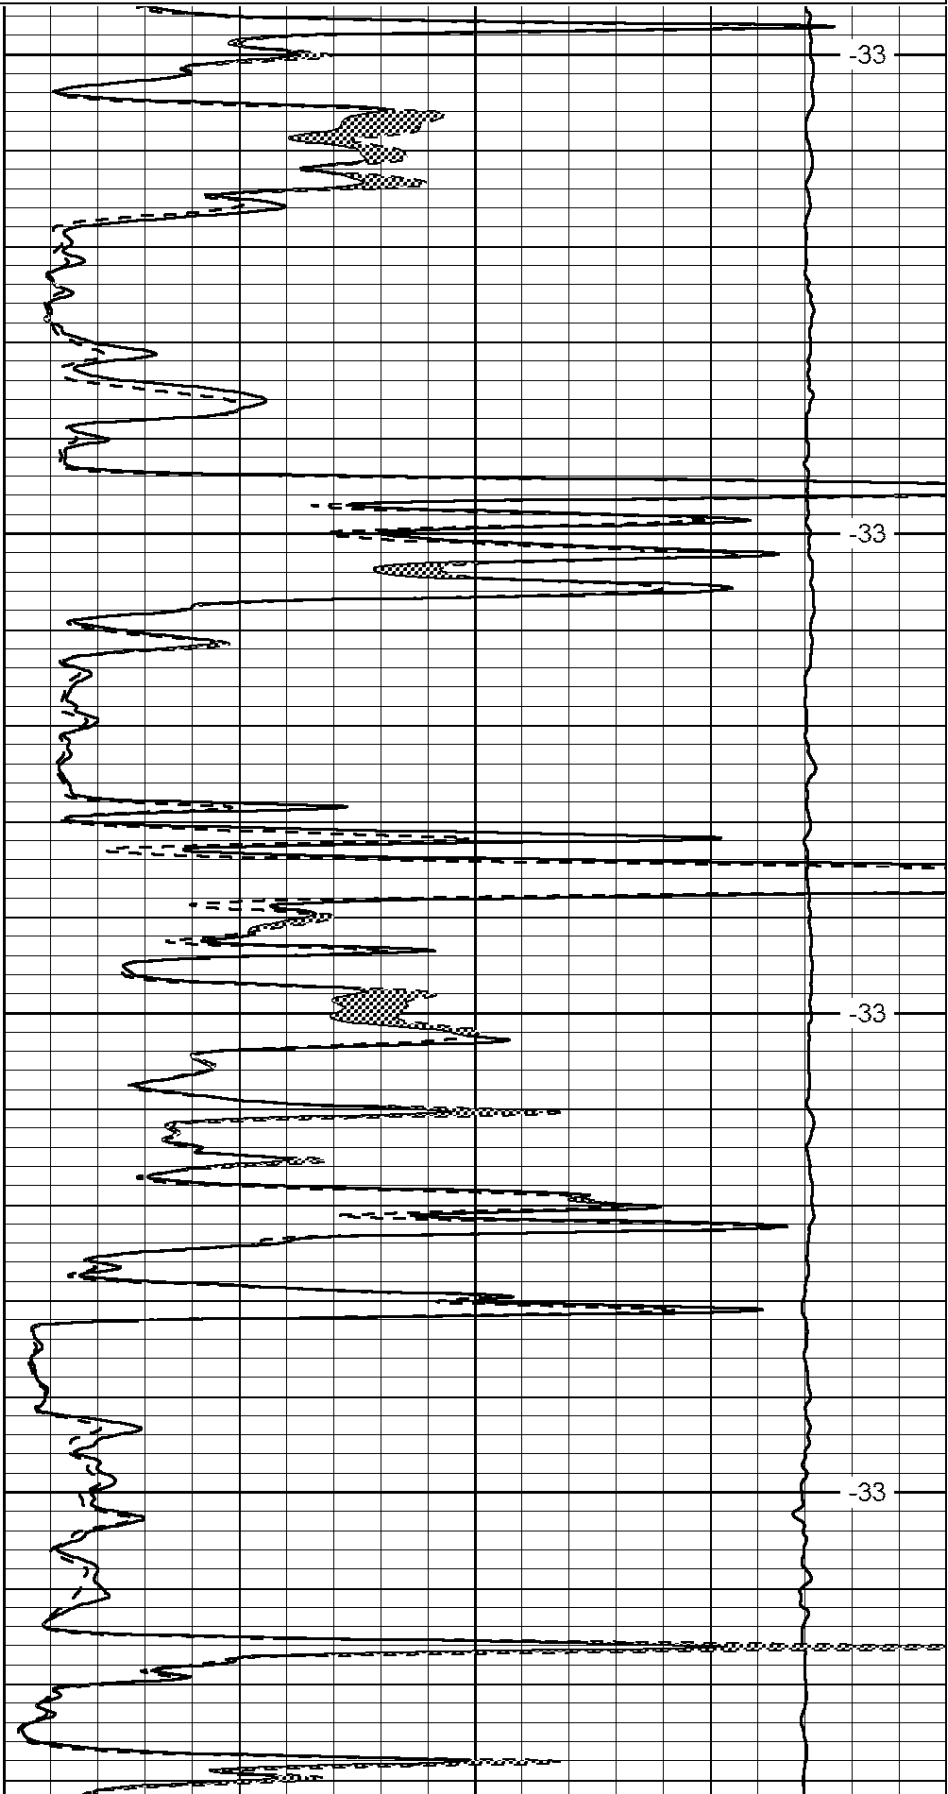


-33

-33

-33

-33

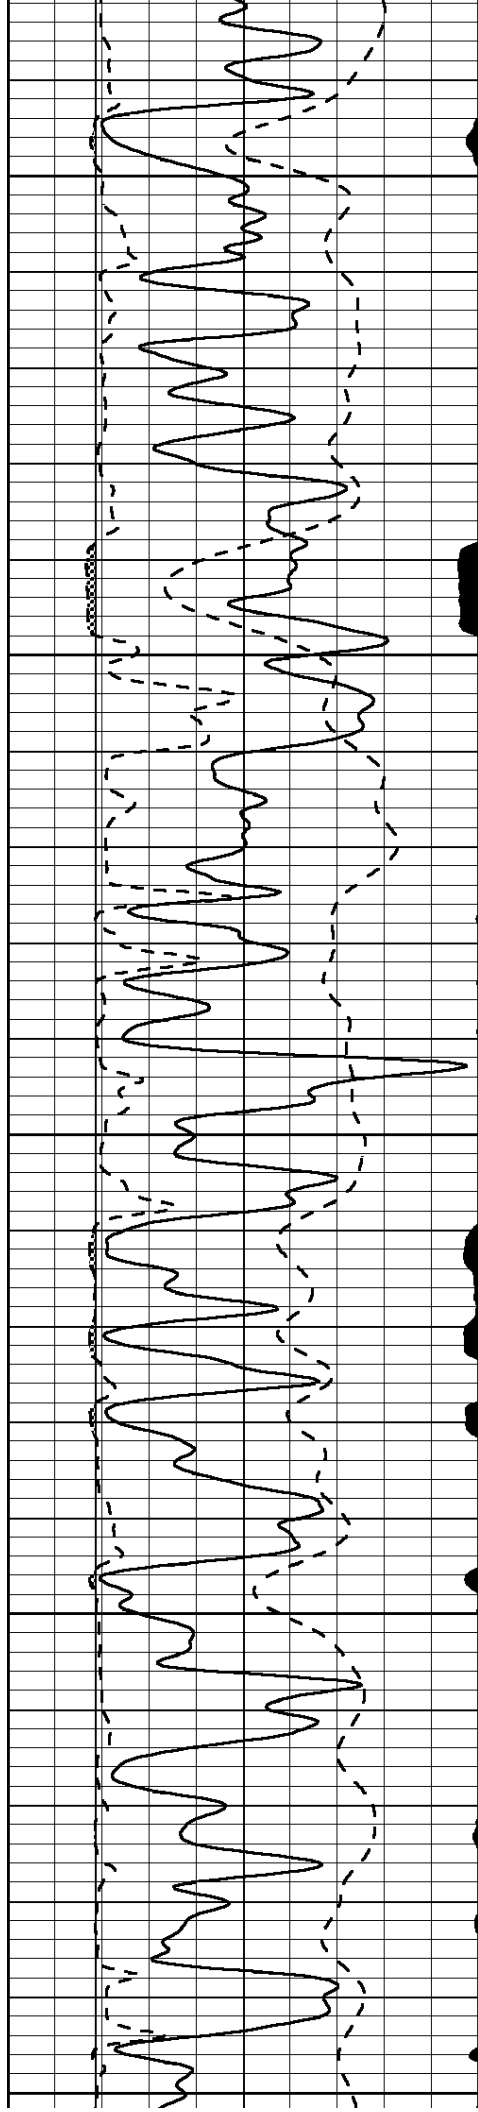

3300

-33

3350

-33

3400


-32

3450

-32

3500

-32

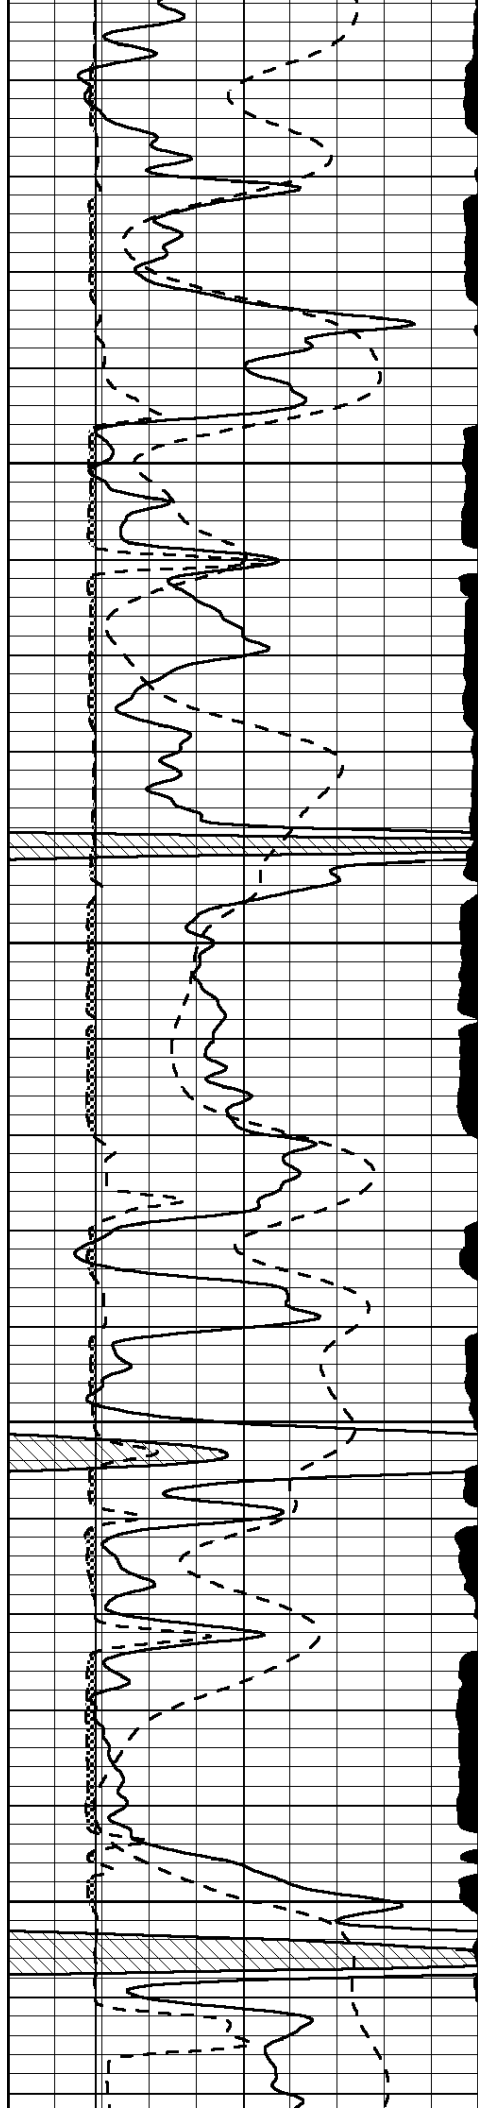



3550

3600

3650

3700

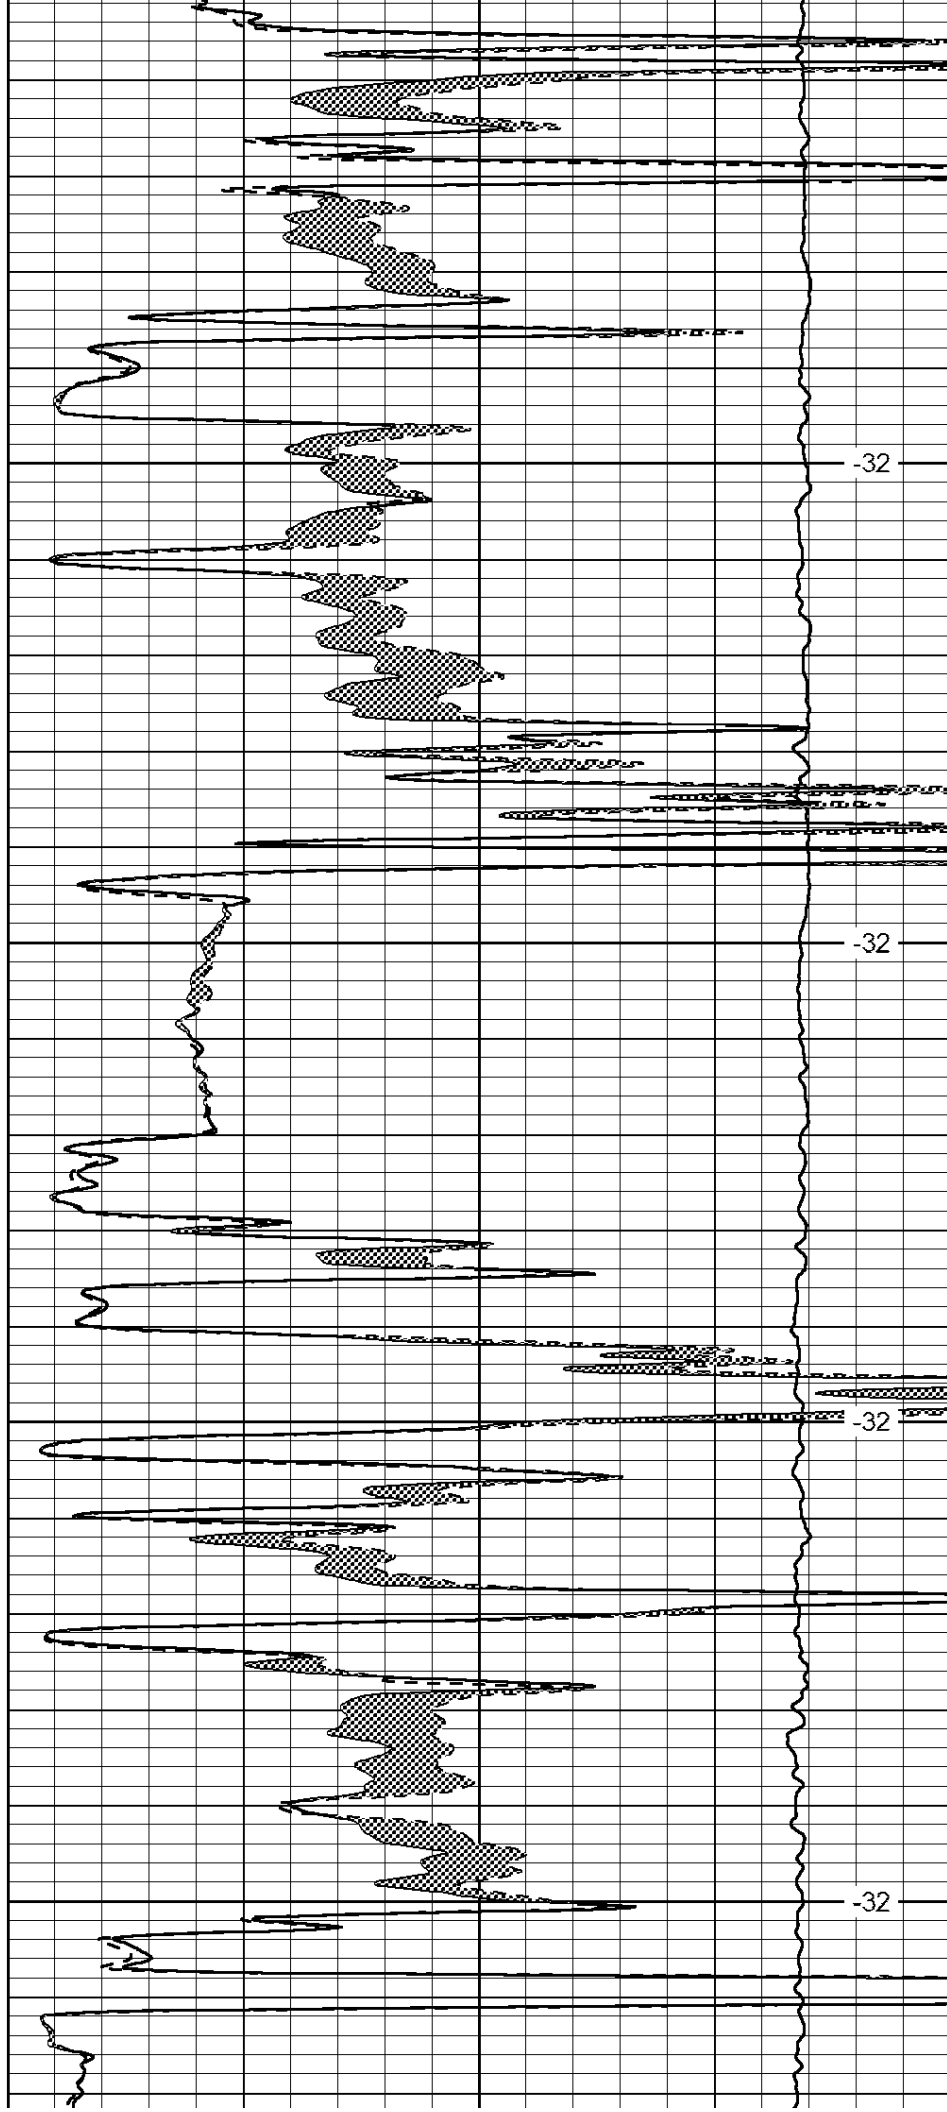

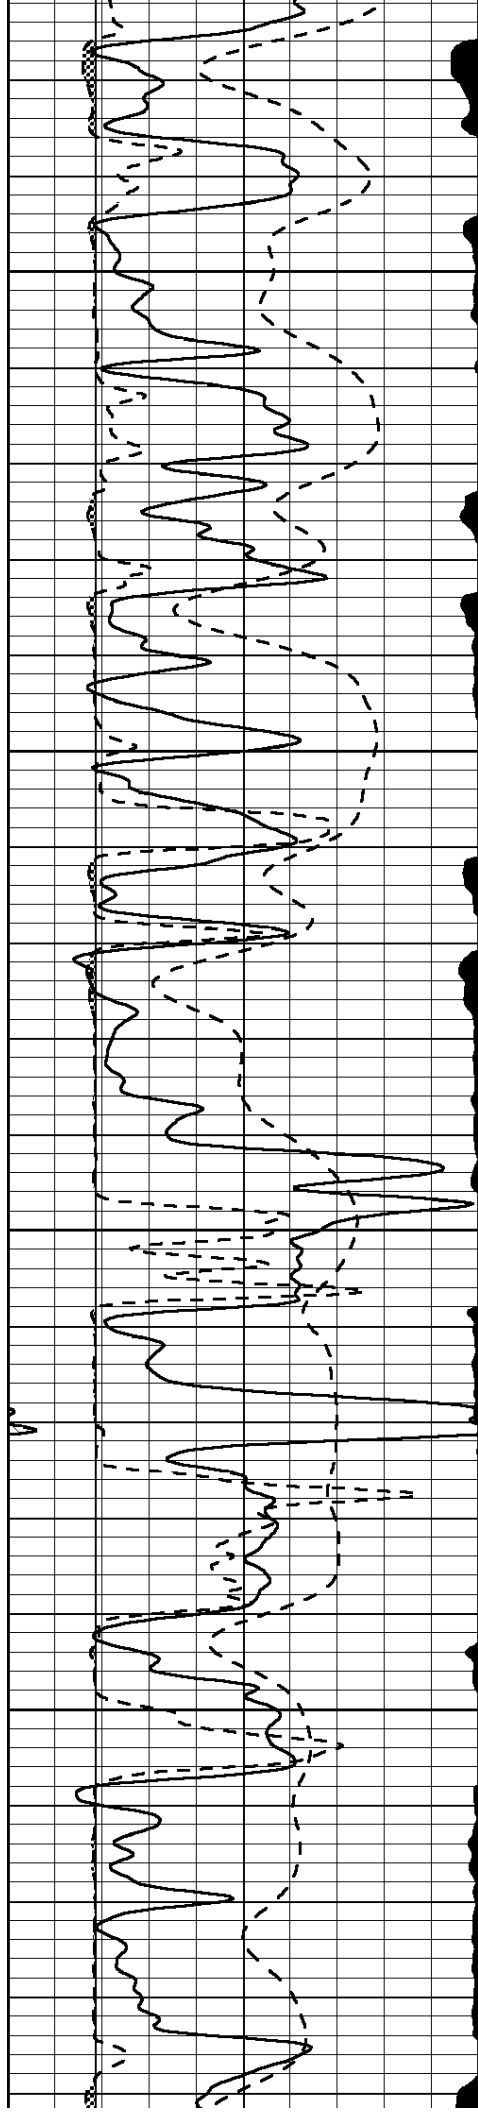


3750

3800

3850

3900

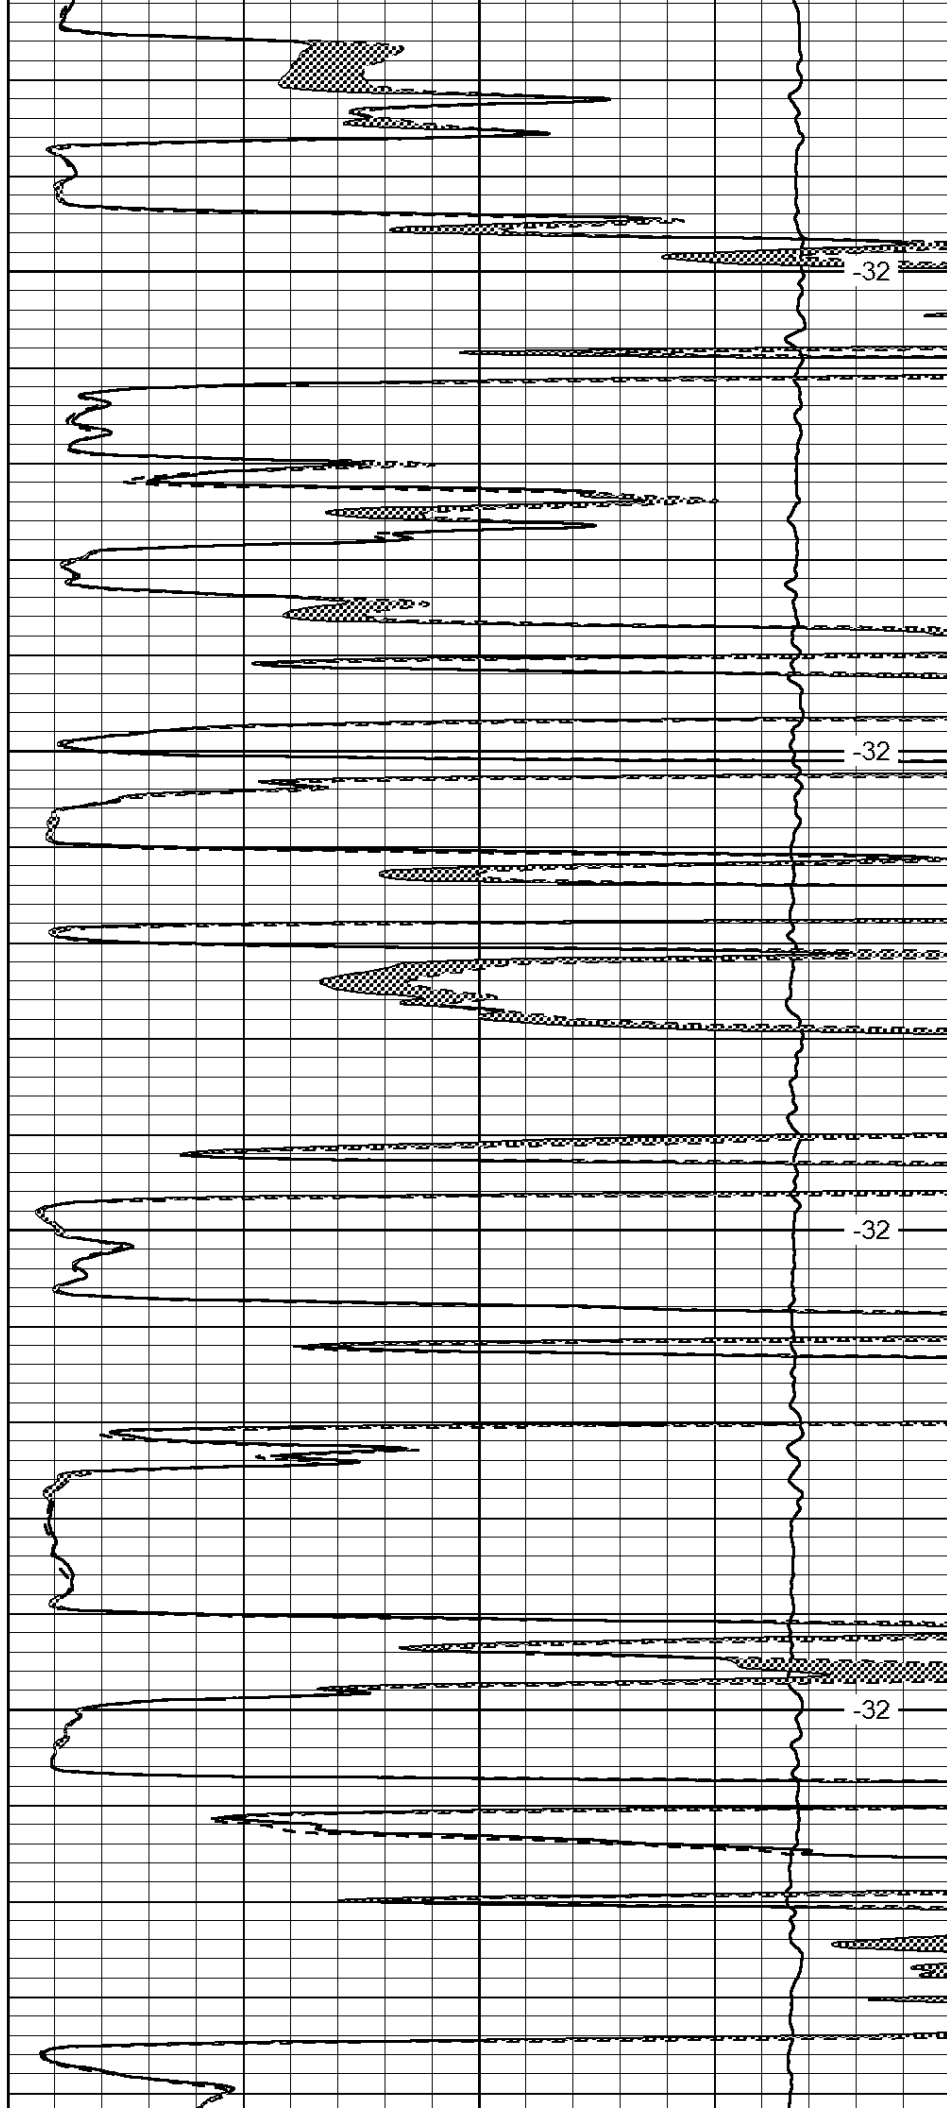


-32

-32

-32

-32

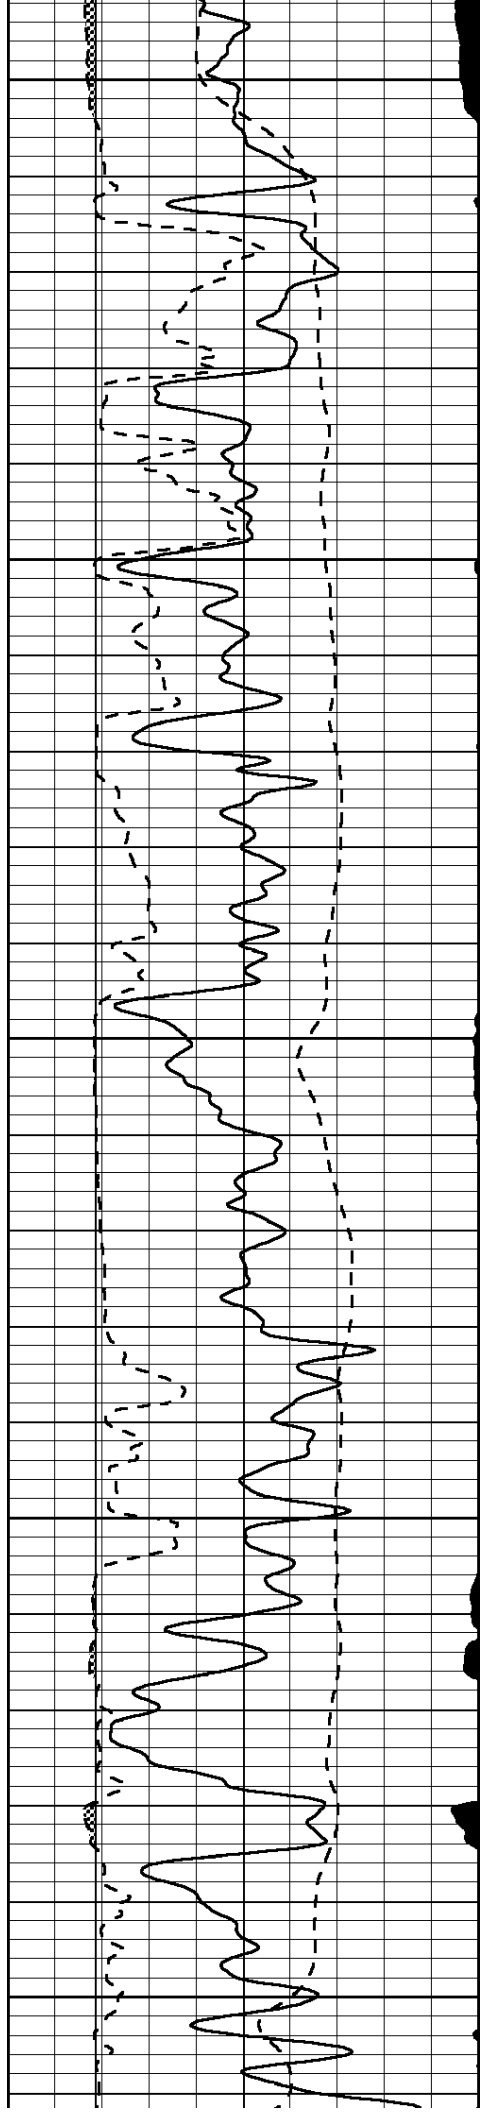

3950

4000

4050

4100

4150


-32

-32

-31

-31

-31

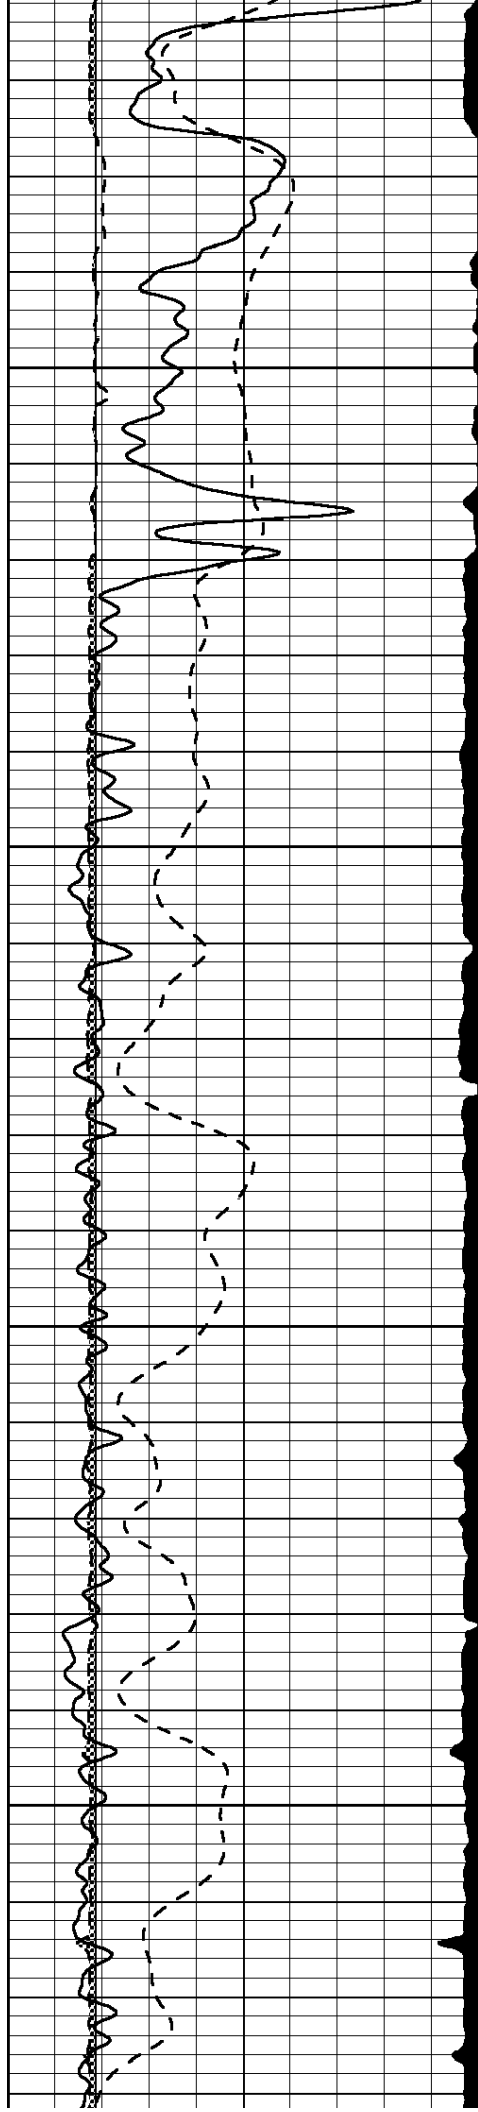


4200

4250

4300

4350

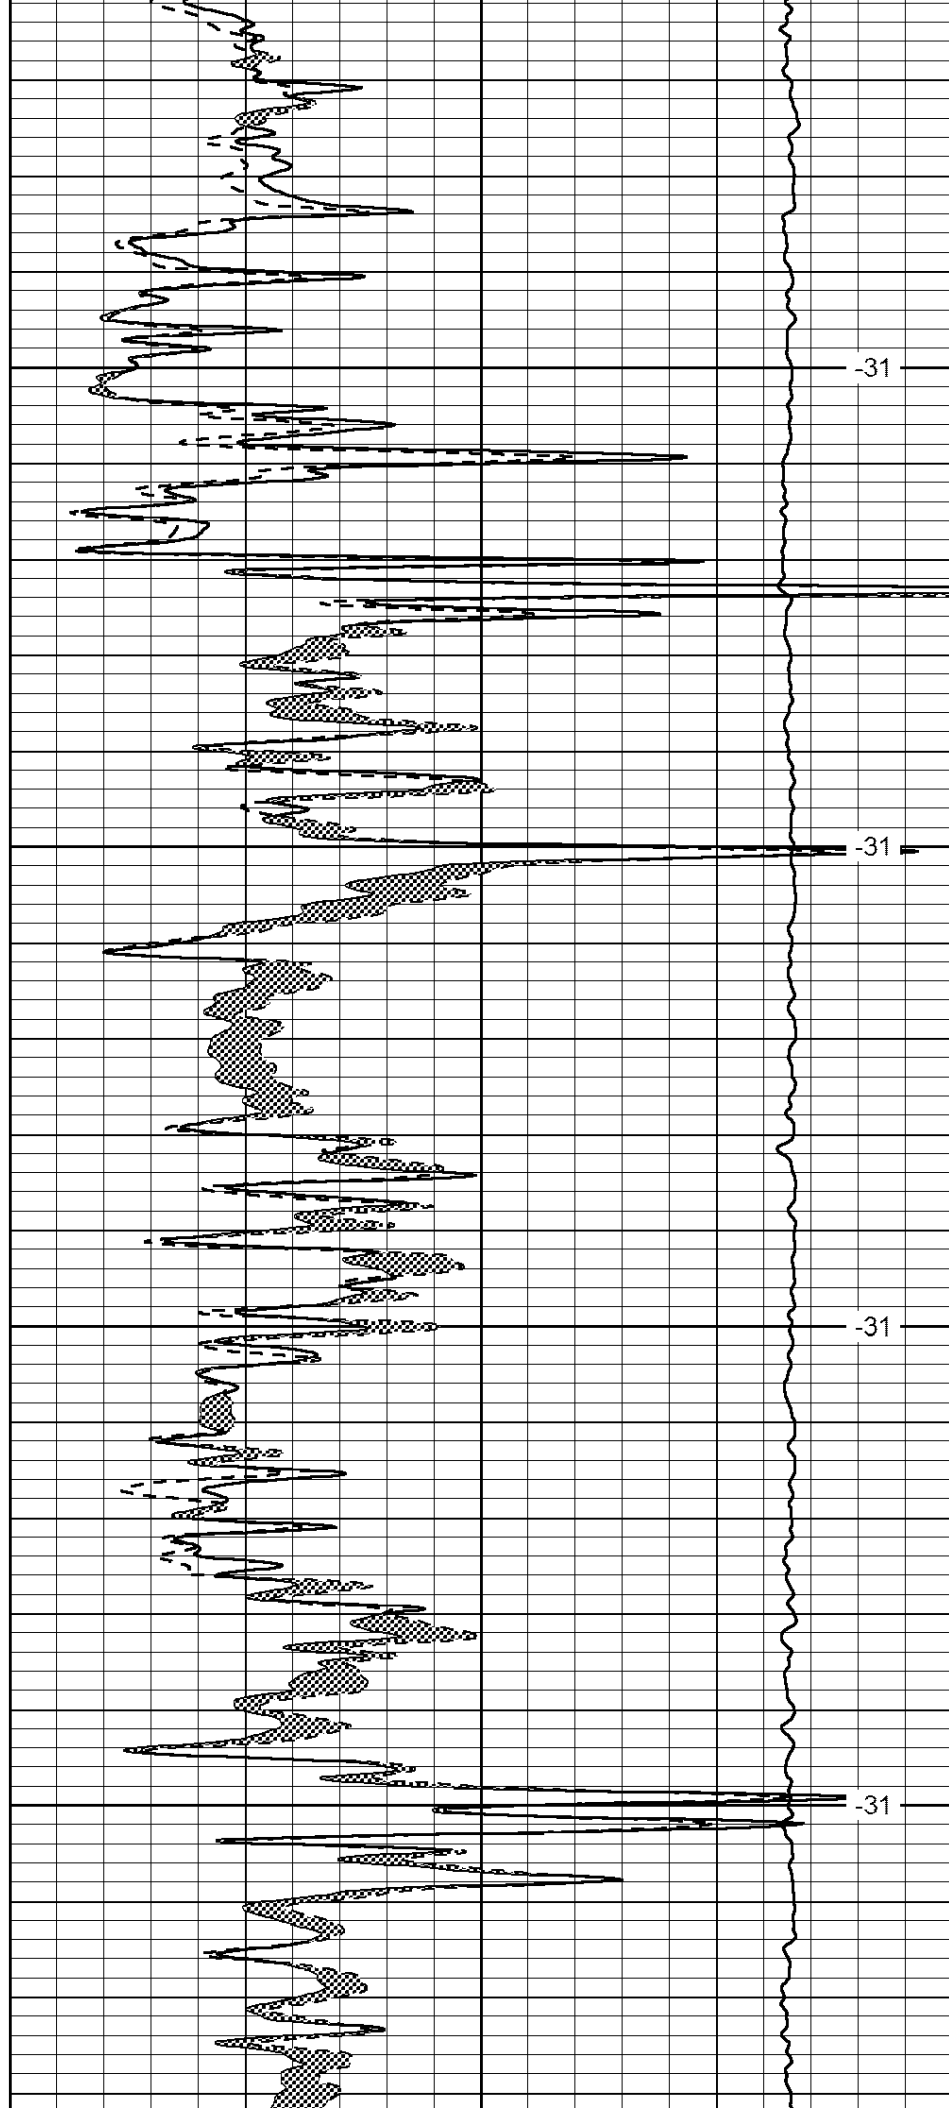

-31

-31

-31

-31




0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
6	Bit Size (in)	16
-200	sp (mV)	0

4400

4450

4500

4550

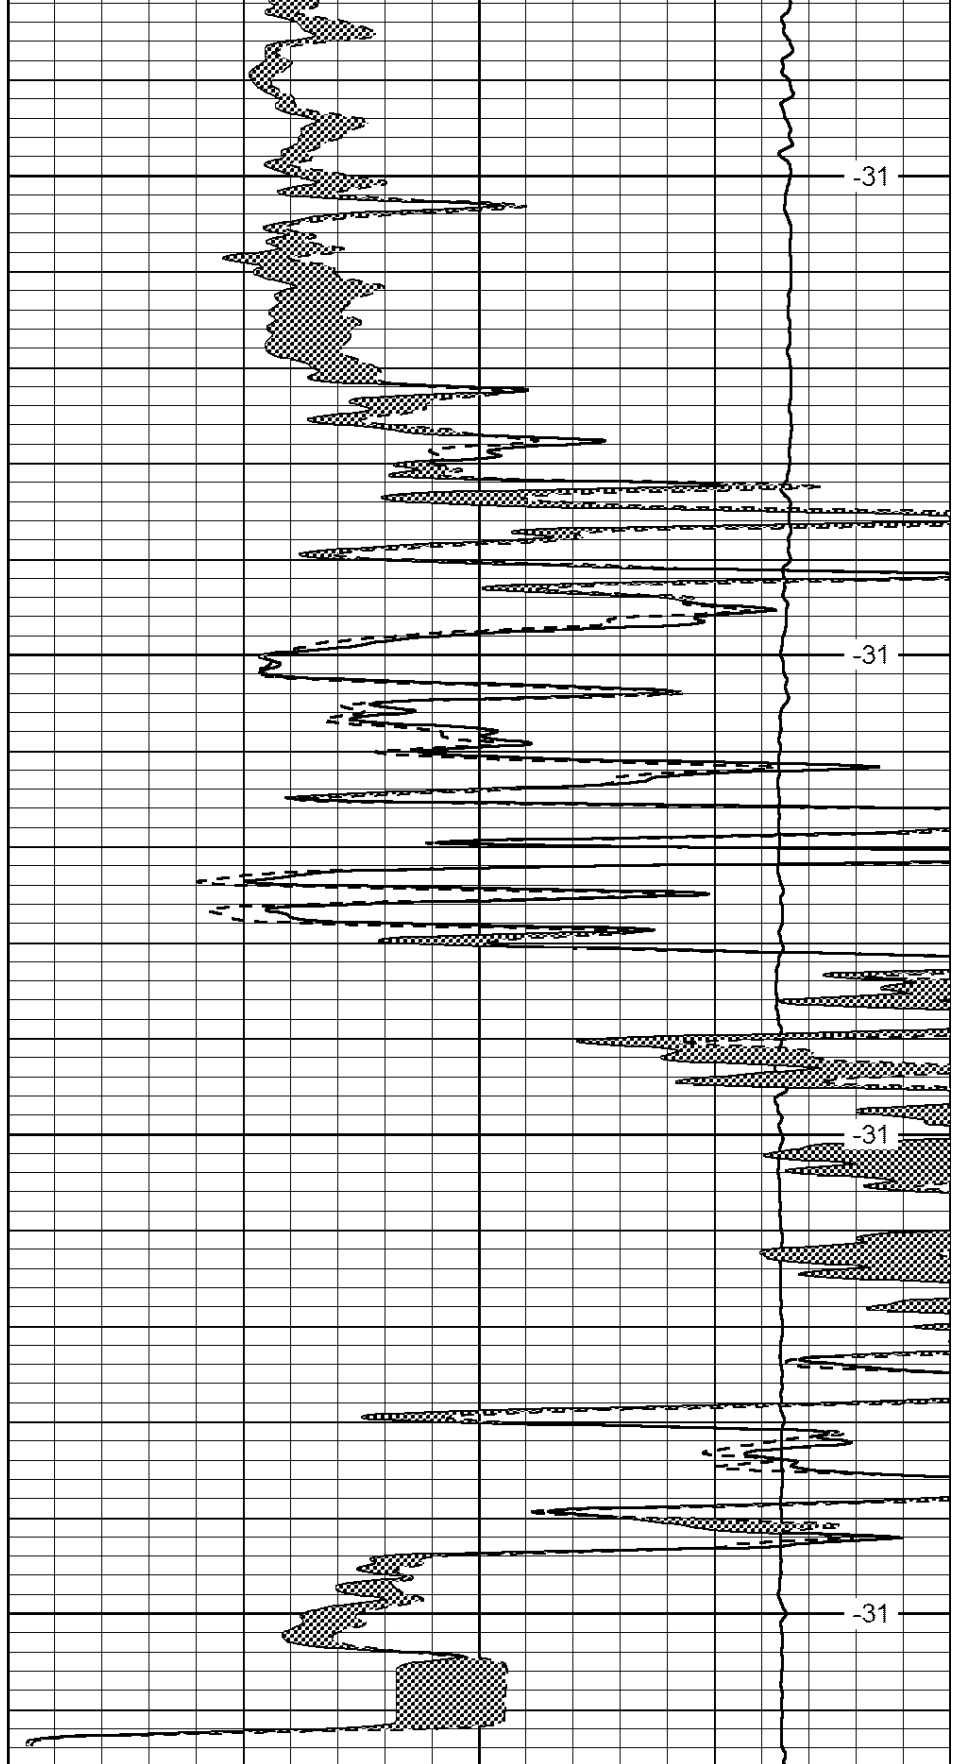

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0


LSPD
(ft/min)

Database File: c:\warrior\data\old folder\maralex.db
 Dataset Pathname: Stack/pass2.1
 Presentation Format: micro
 Dataset Creation: Sat Jan 08 10:45:33 2011 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
6	Bit Size (in)	16
-200	sp (mV)	0

0	Micro Inverese 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0


LSPD
(ft/min)

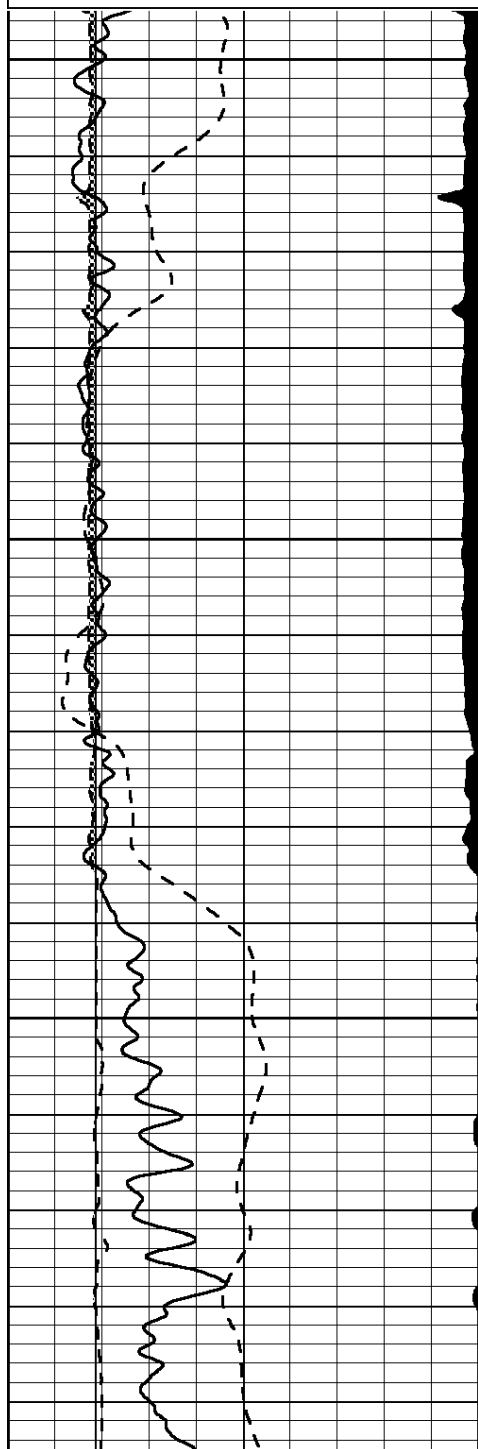

4350

4400


4450

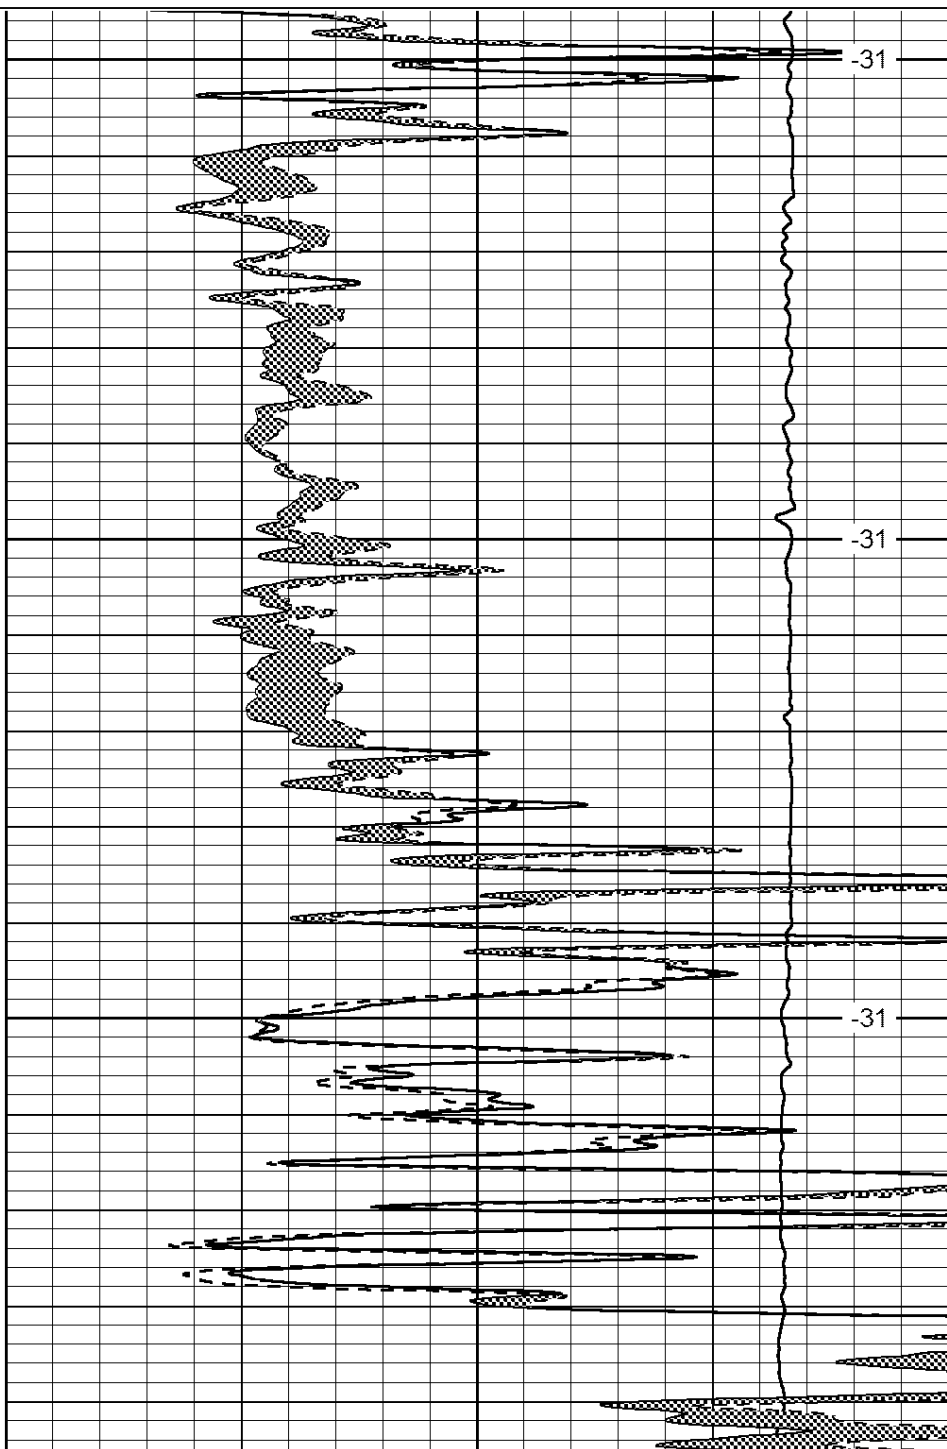

-31

-31


-31

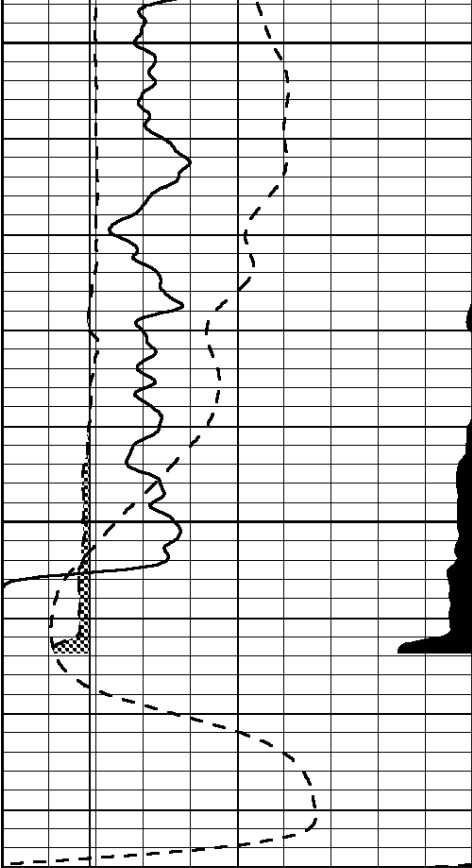

0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
6	Bit Size (in)	16
-200	sp (mV)	0

4500

4550

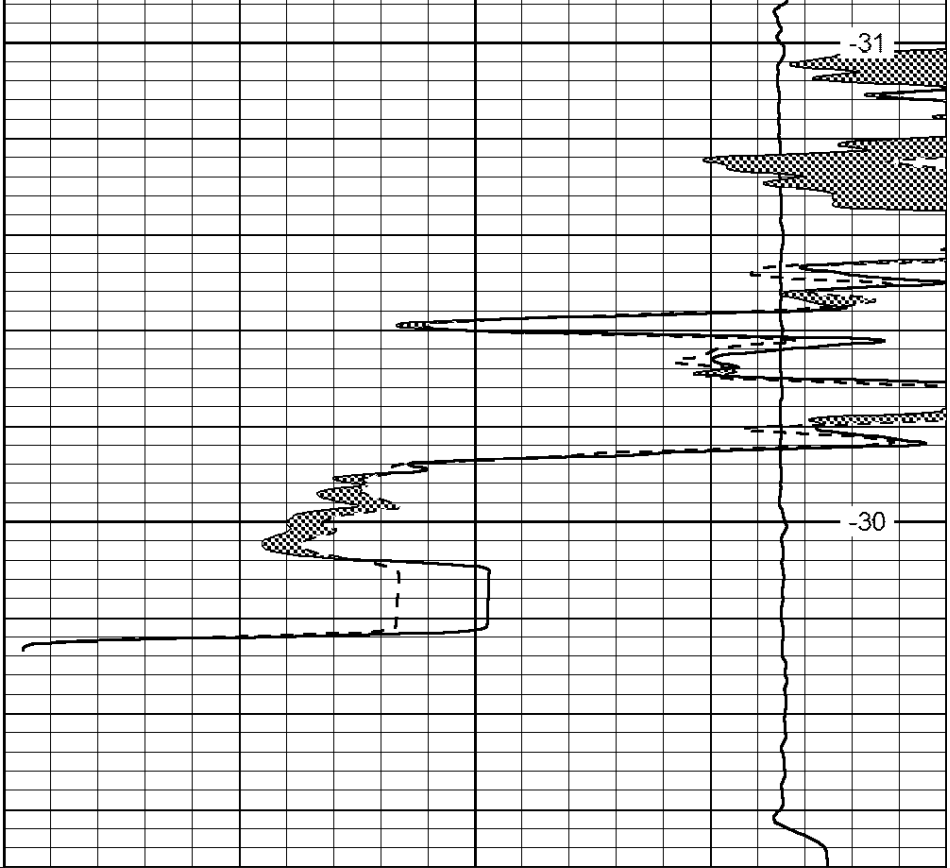

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)