



SUPERIOR
Hays,
Kansas

MICRO LOG

Company	CORAL PRODUCTION CORPORATION		
Well	KELLER #26-2		
Field	VAN WINKLE SOUTHEAST		
County	STAFFORD	State	KANSAS
Location:	API # : 15-185-23726-0000 330' FSL & 720' FWL		Other Services
SEC 26	TWP 21S	RGE 14W	
Permanent Datum	GROUND LEVEL	Elevation	1931
Log Measured From	KELLY BUSHING 10' A.G.L.	K.B. 1941	
Drilling Measured From	KELLY BUSHING	D.F. 1939	
		G.L. 1931	
Date	12/22/11		
Run Number	ONE		
Depth Driller	3794		
Depth Logger	3794		
Bottom Logged Interval	3792		
Top Log Interval	2800		
Casing Driller	8 5/8" @ 884		
Casing Logger	884		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4000 PPM	
Density / Viscosity	9.4/46		
pH / Fluid Loss	9.0/9.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.1 @ 48F		
Rmf @ Meas. Temp	.82 @ 48F		
Rmc @ Meas. Temp	1.32 @ 48F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.45 @ 116		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	116F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	TIM LAUER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395
DIRECTIONS
LARNED, KS. - 14 E. TO RD 50 - 2 N. - 1/8 E. - N. INTO




SUPERIOR
Hays,
Kansas

ANHYDRITE

Database File: 008659mel.db
 Dataset Pathname: pass4.1
 Presentation Format: _micro
 Dataset Creation: Thu Dec 22 09:54:25 2011 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

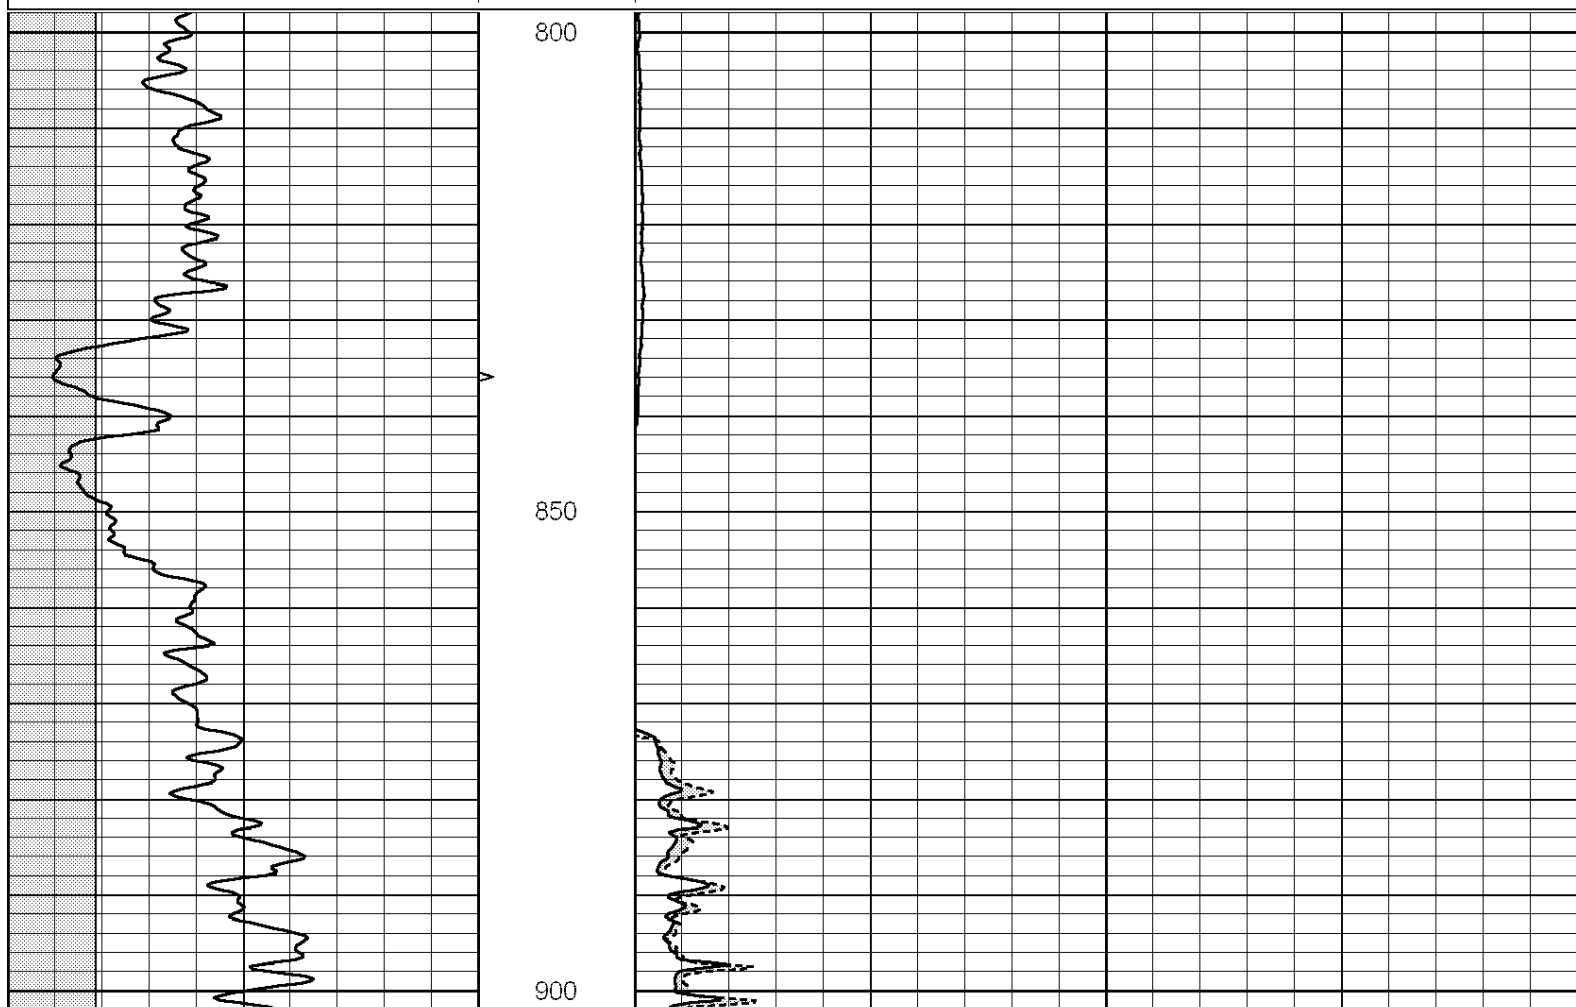

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		





SUPERIOR
 Hays,
 Kansas

MAIN SECTION

Database File: 008659mel.db
 Dataset Pathname: pass3.1
 Presentation Format: _micro
 Dataset Creation: Thu Dec 22 09:38:47 2011 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

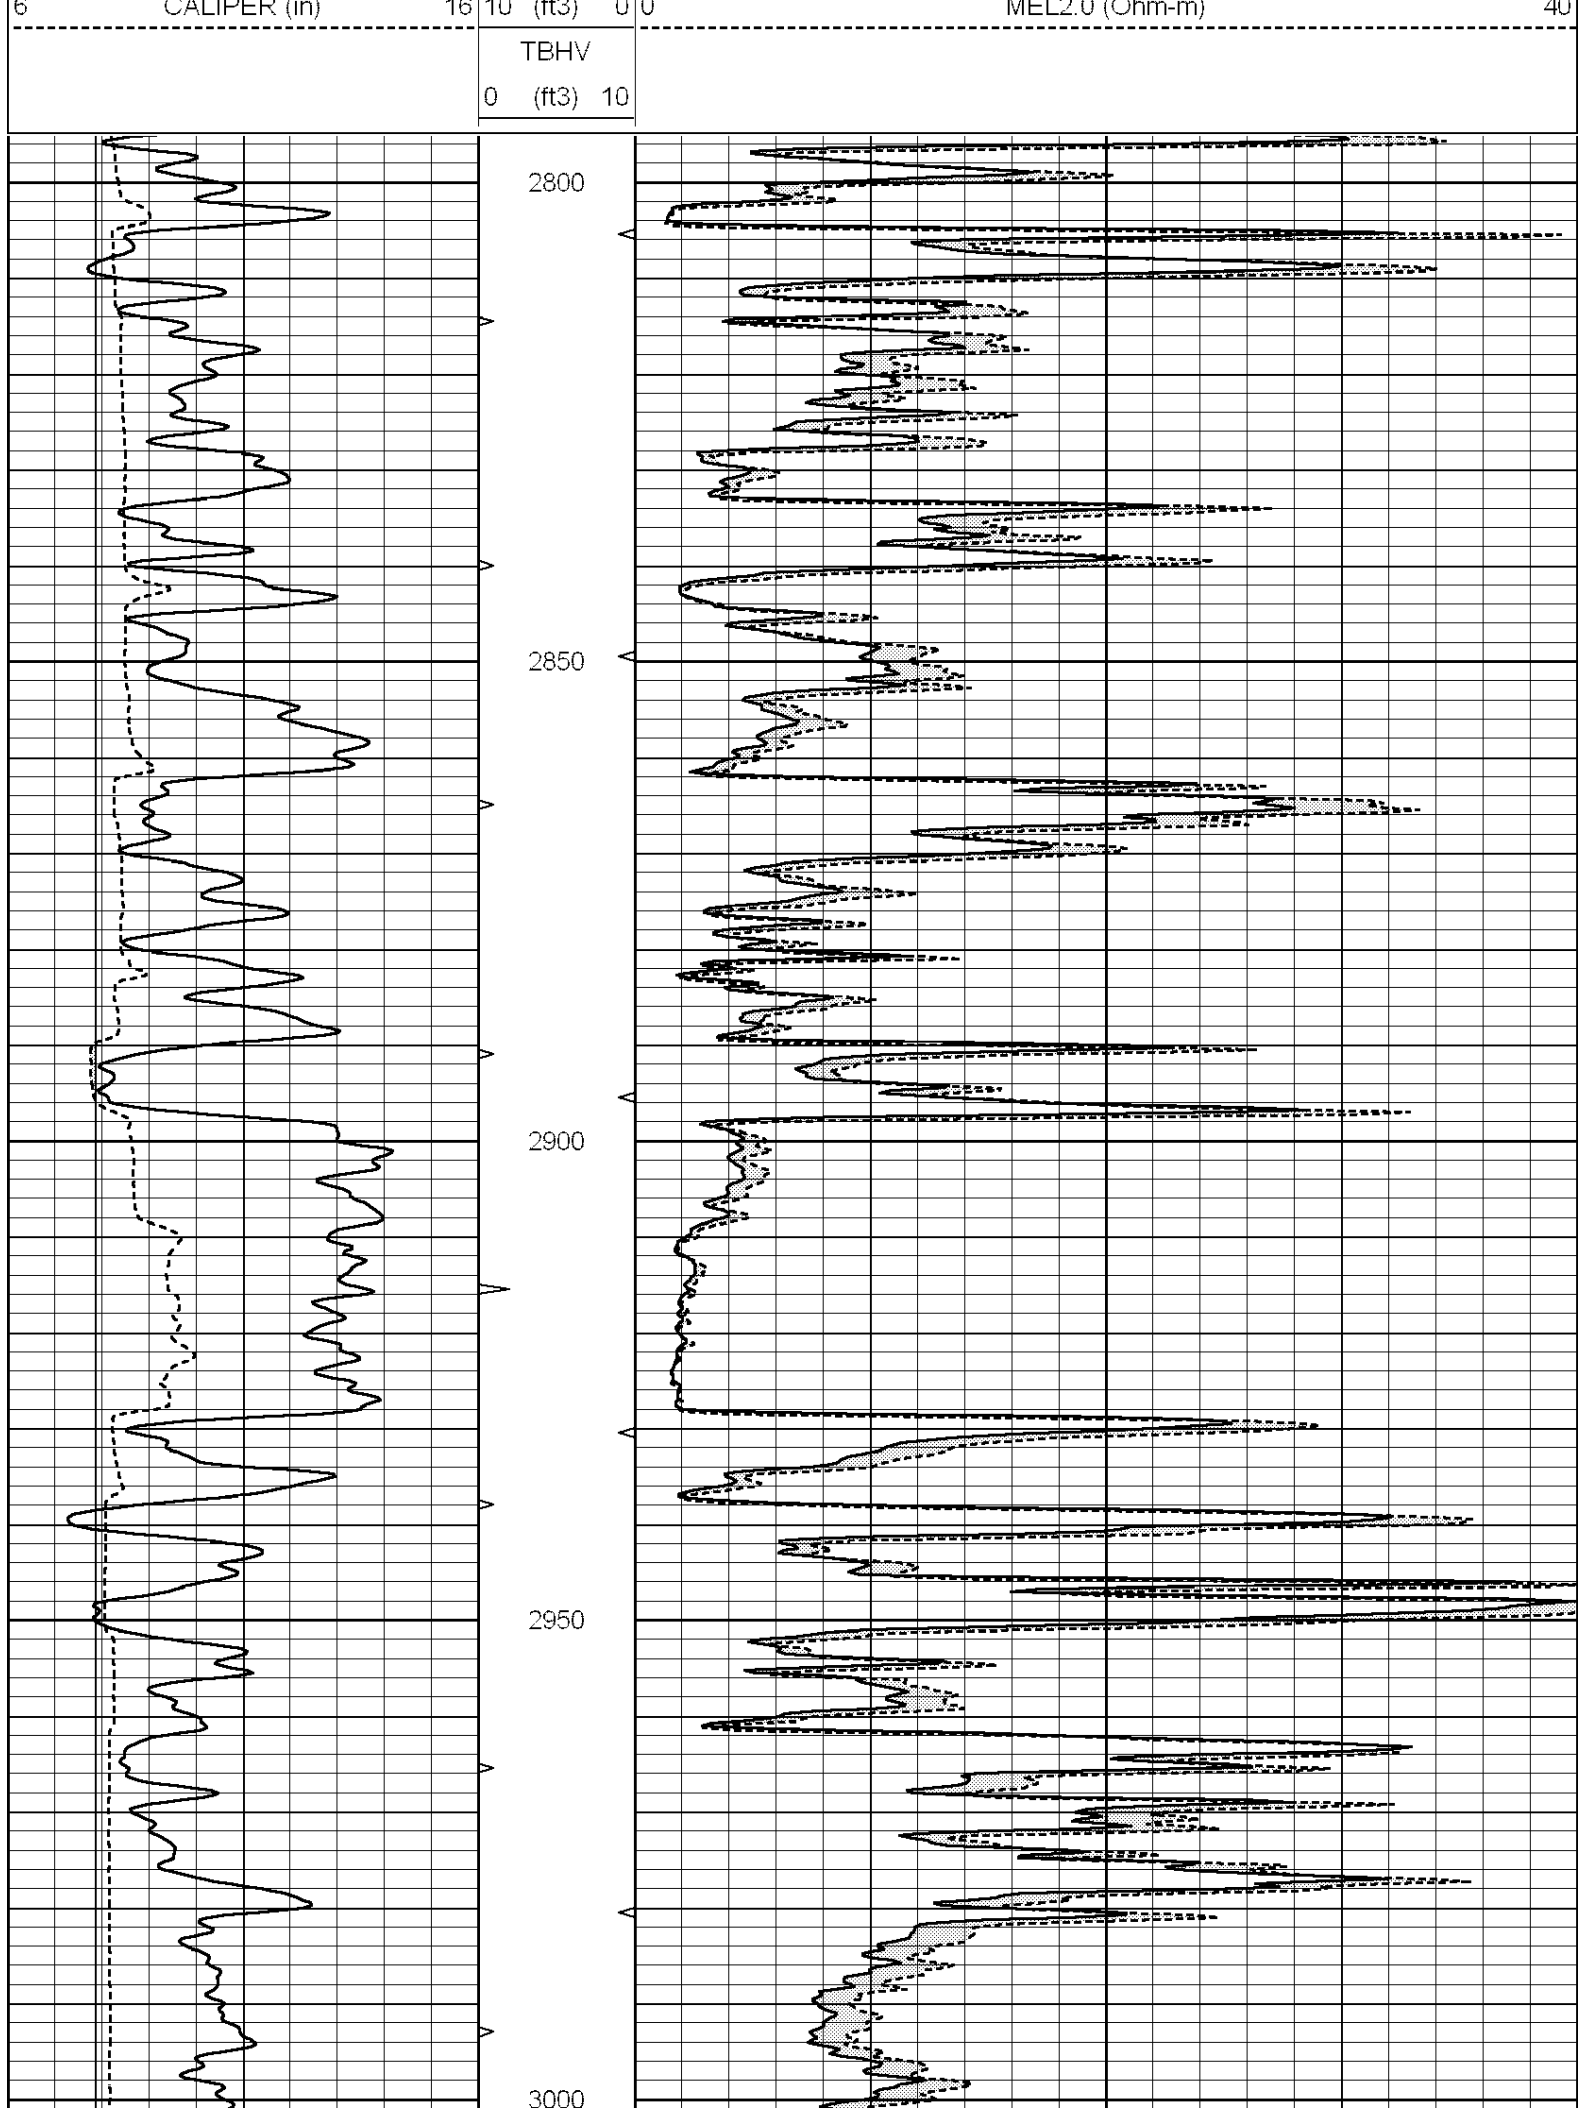

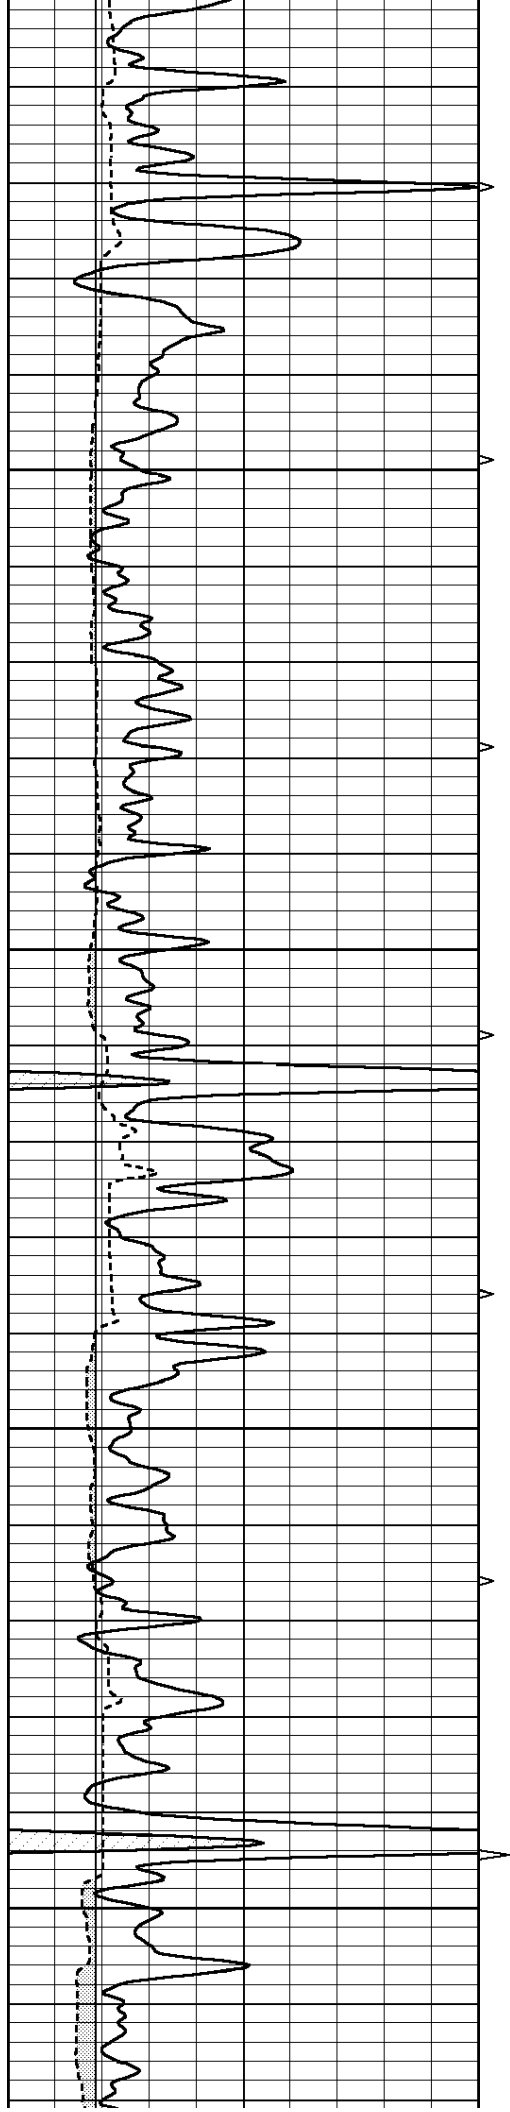



3050

3100

3150

3200

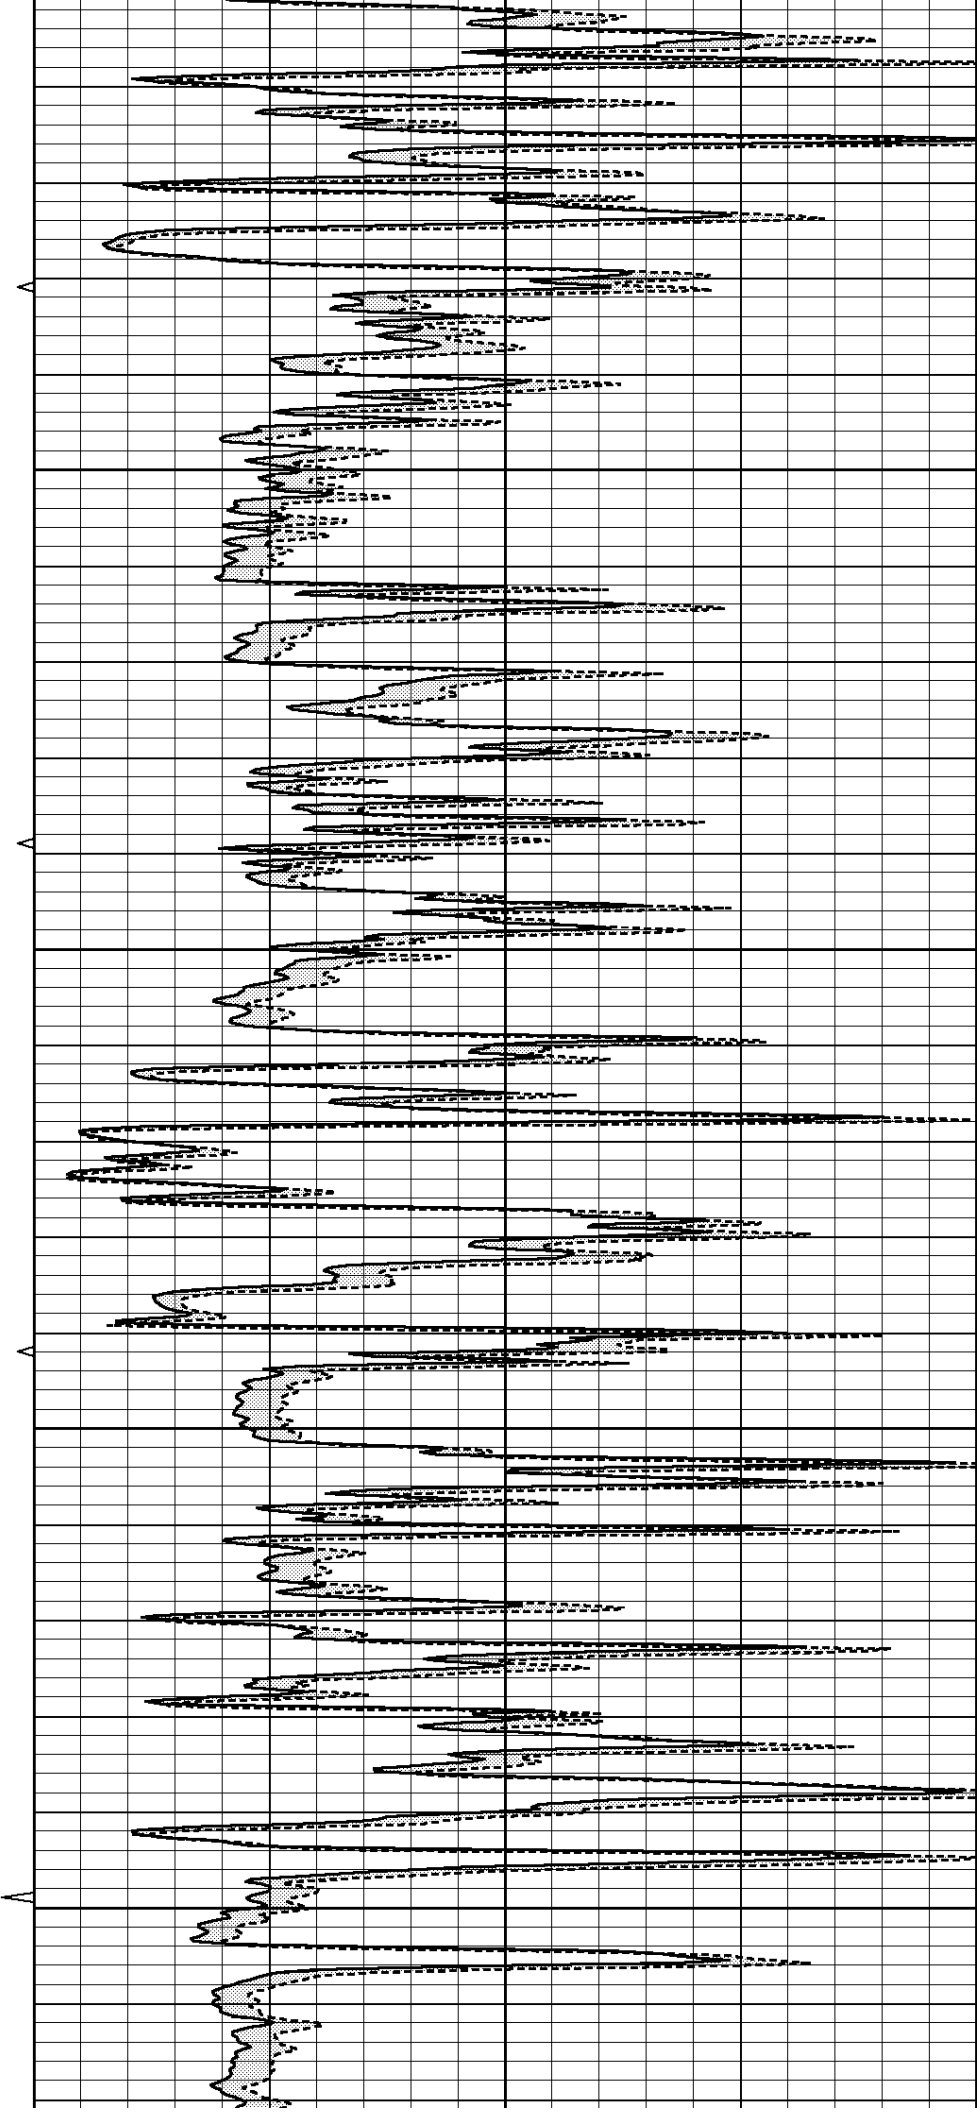

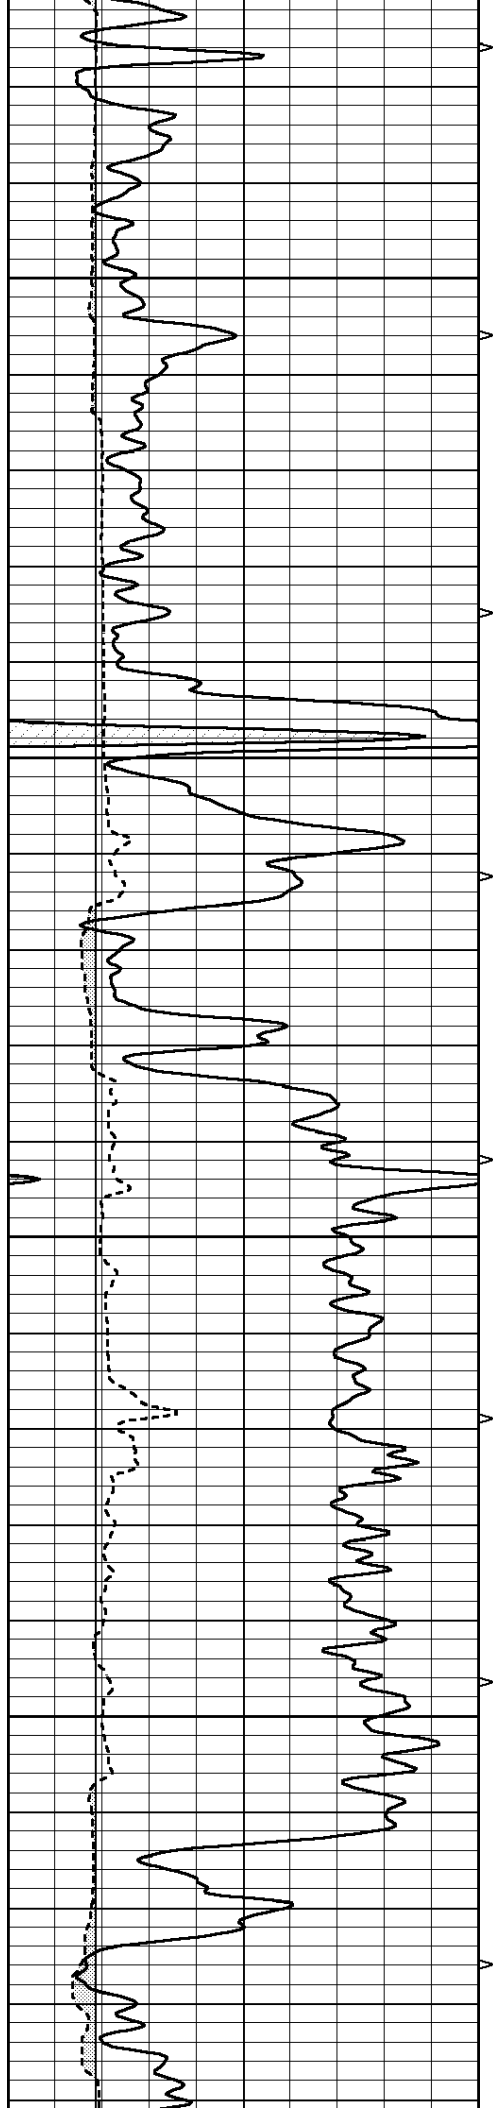




3250


3300

3350

3400

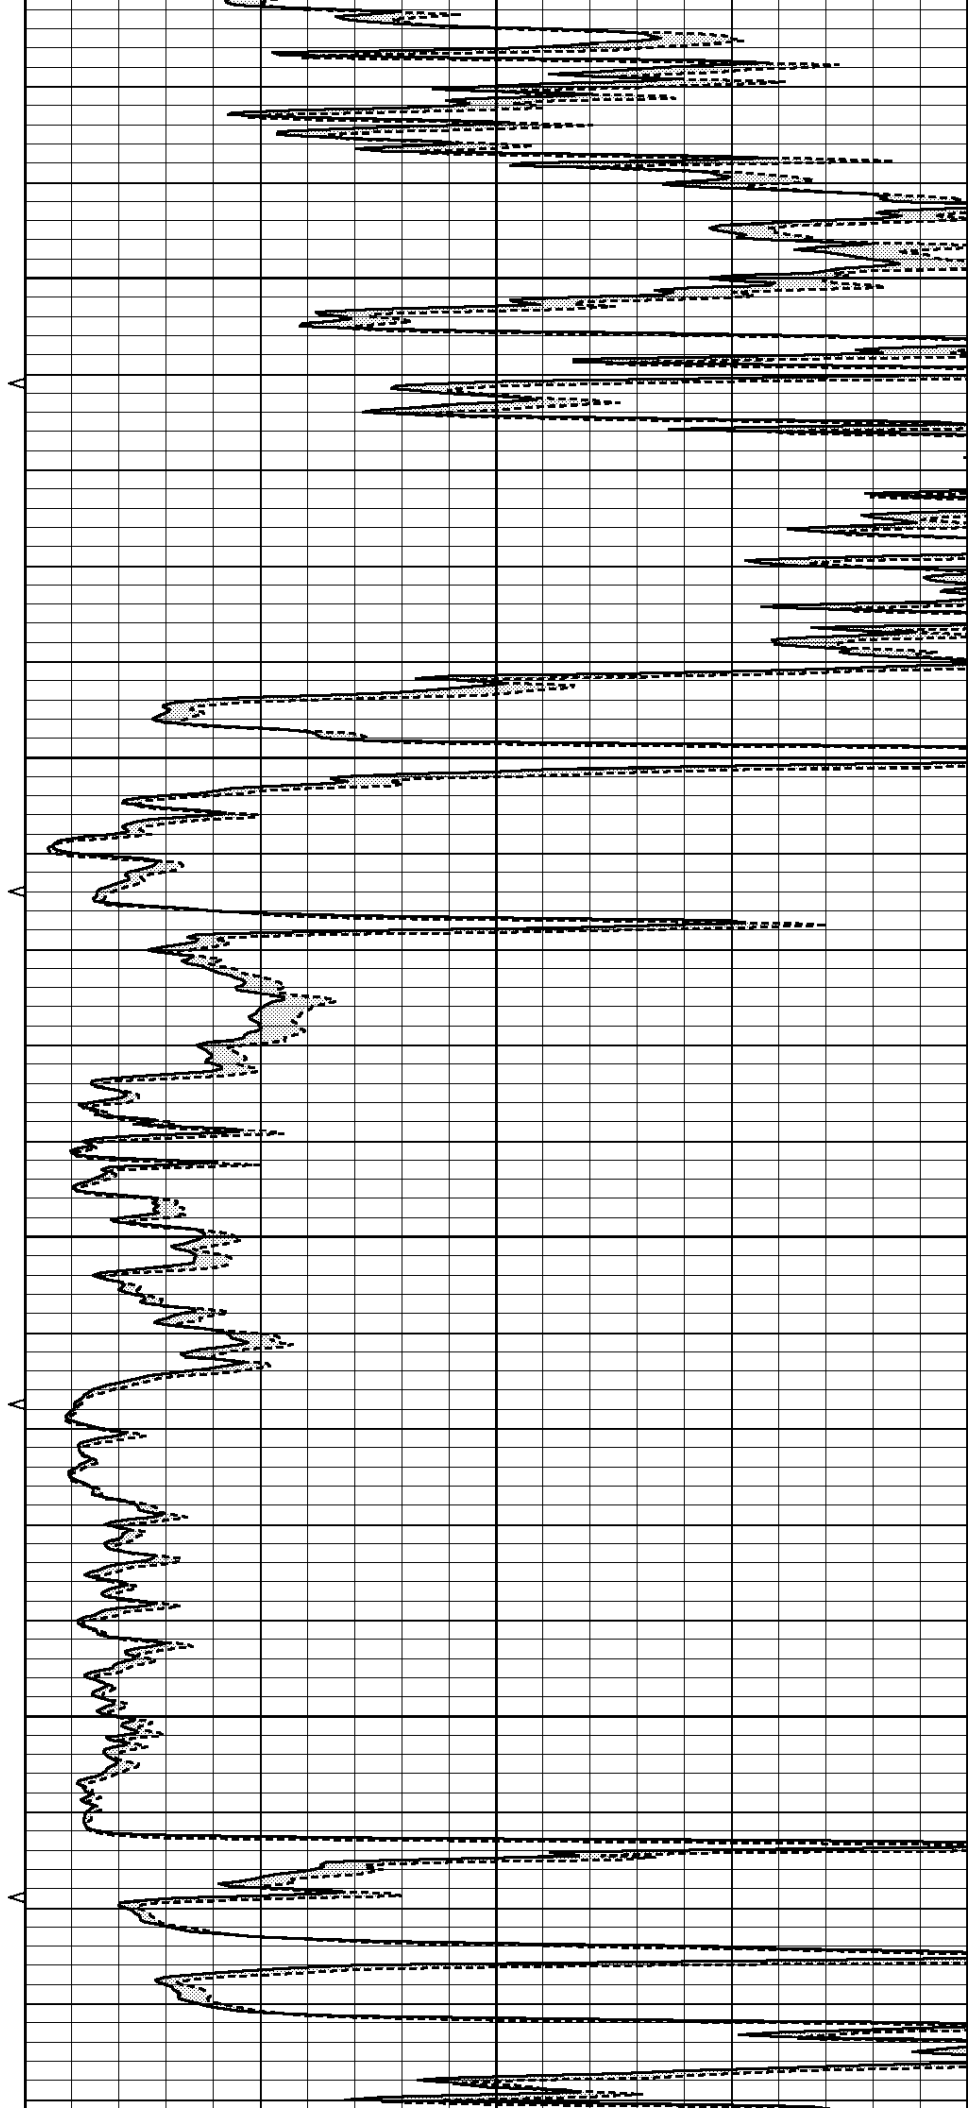

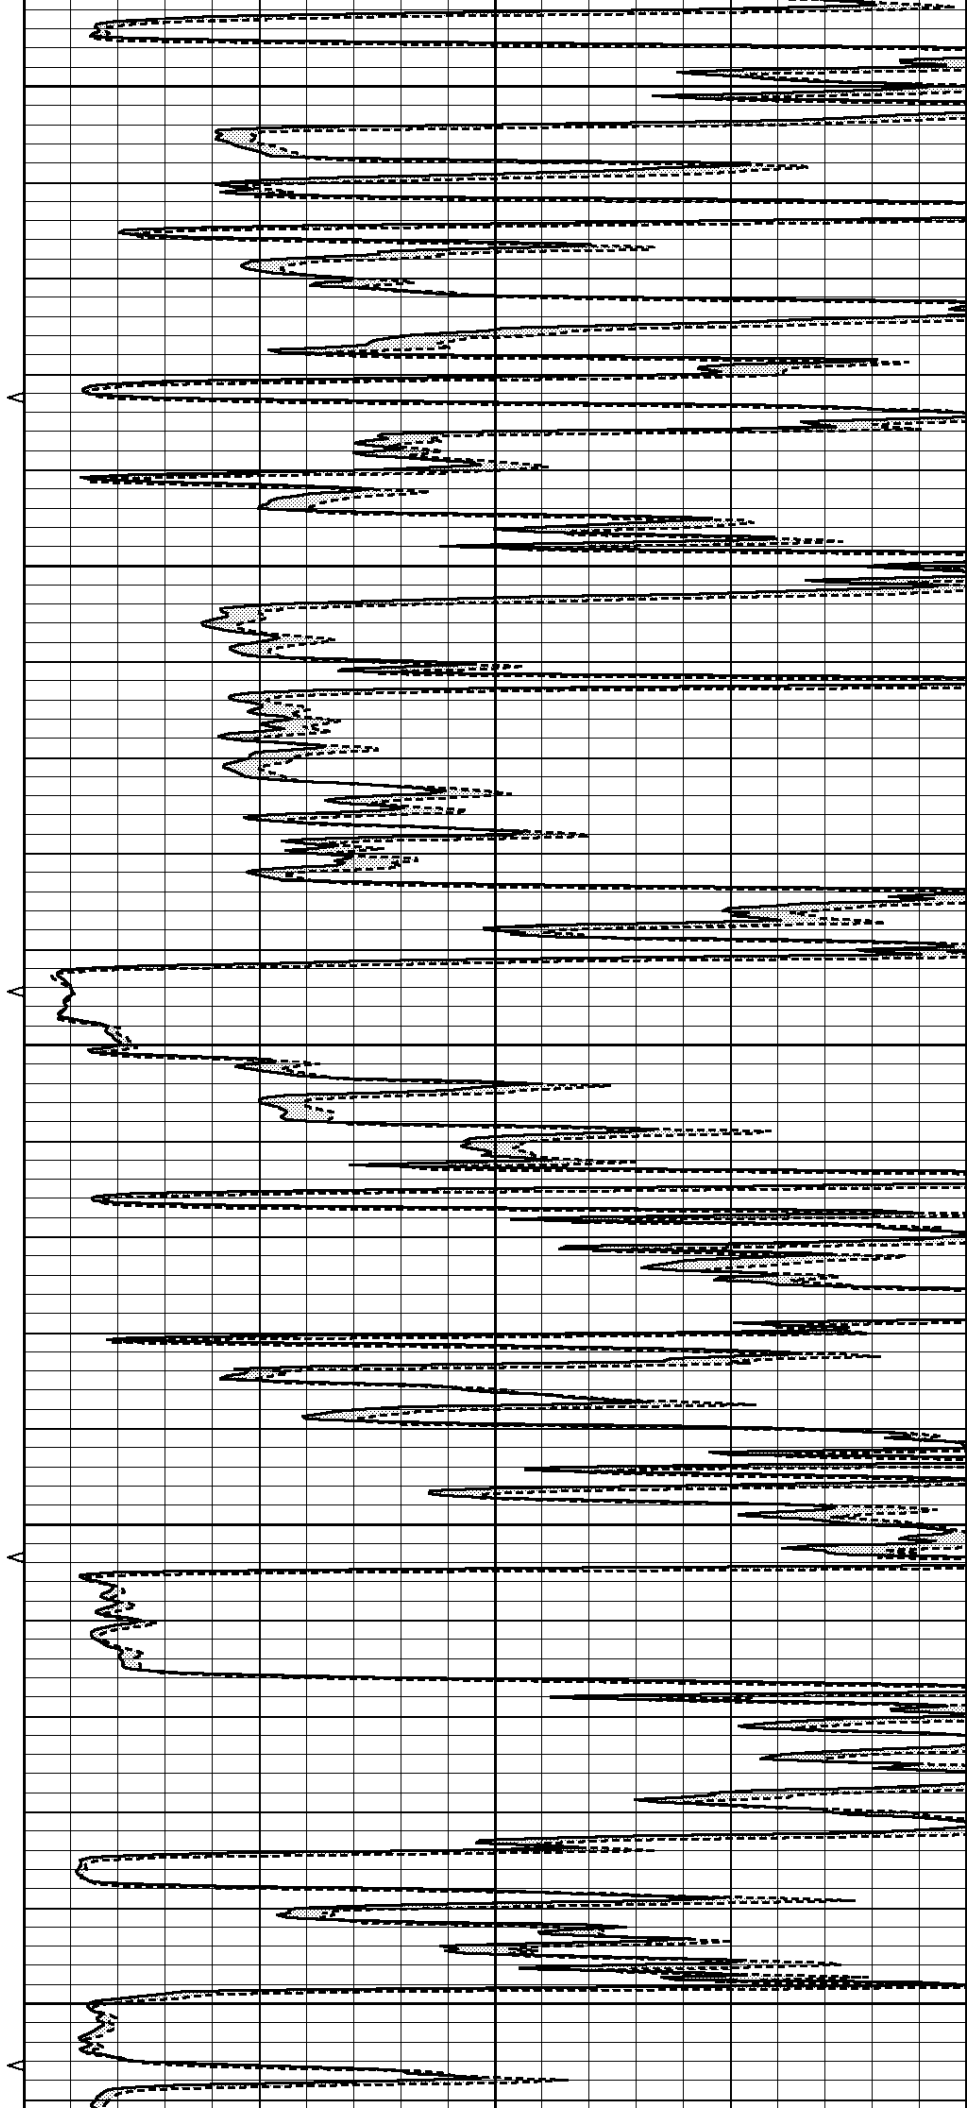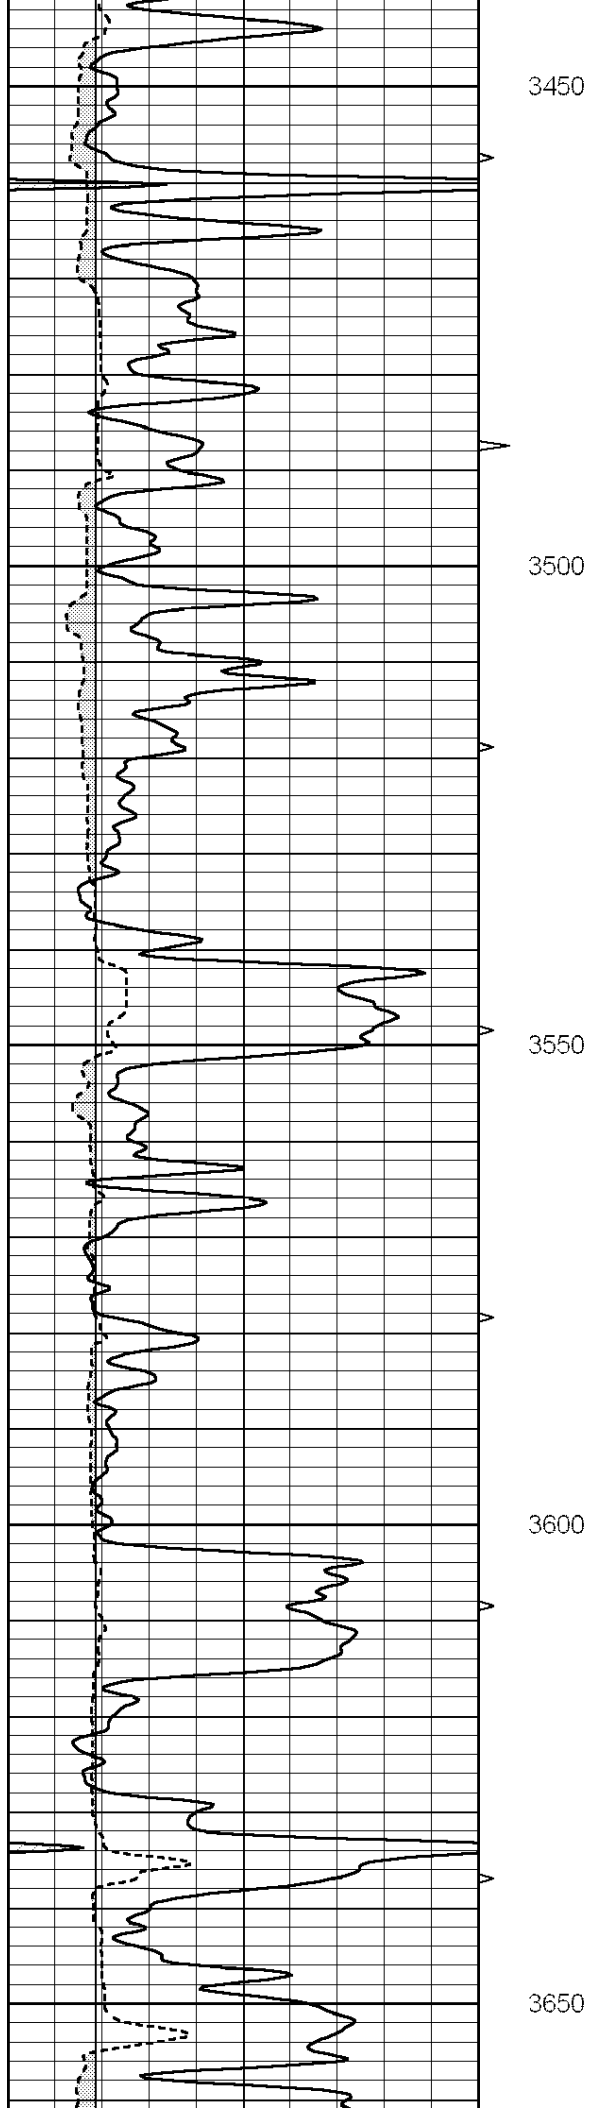

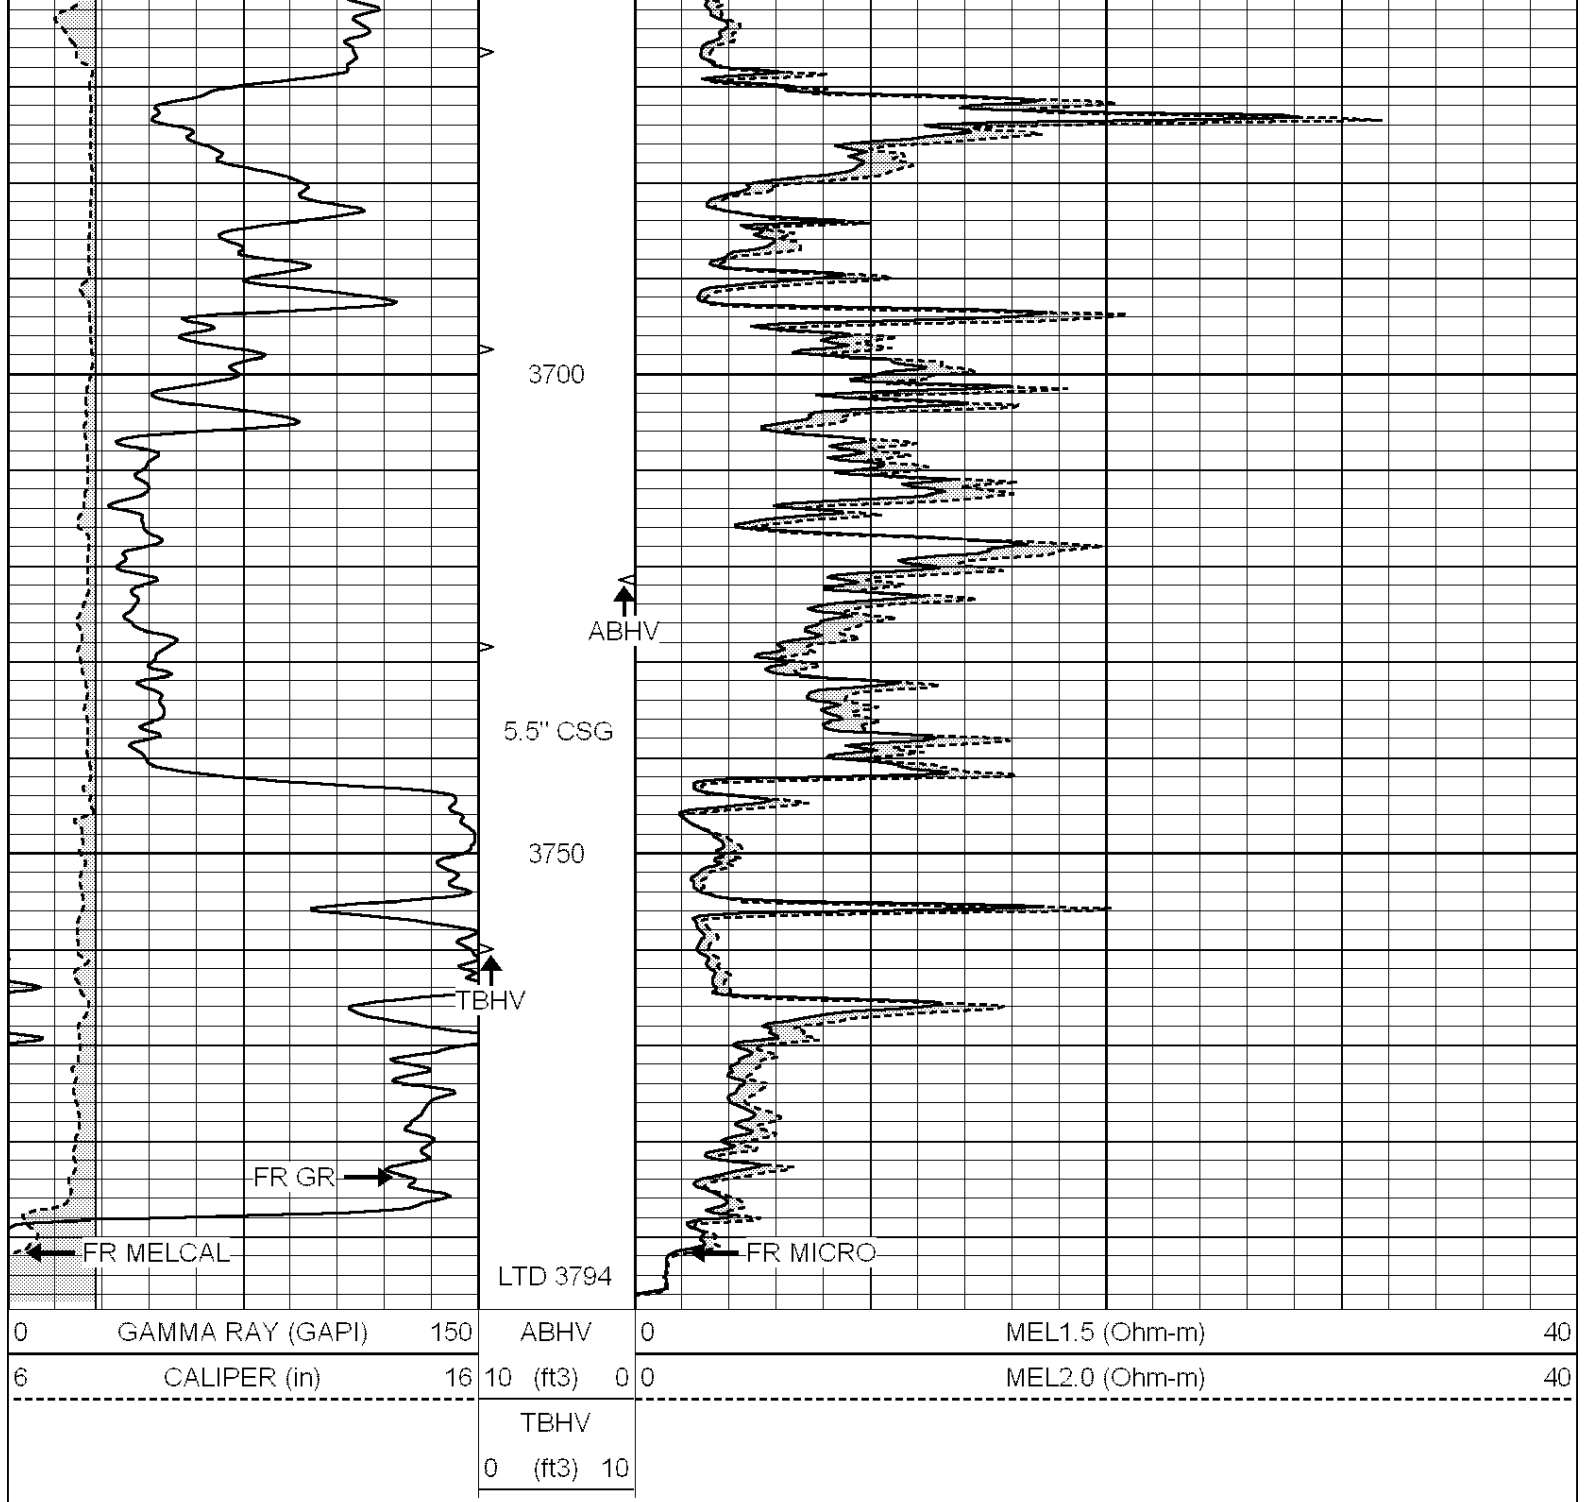


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 008659mel.db
 Dataset Pathname: pass2.1
 Presentation Format: _micro
 Dataset Creation: Thu Dec 22 09:41:32 2011 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

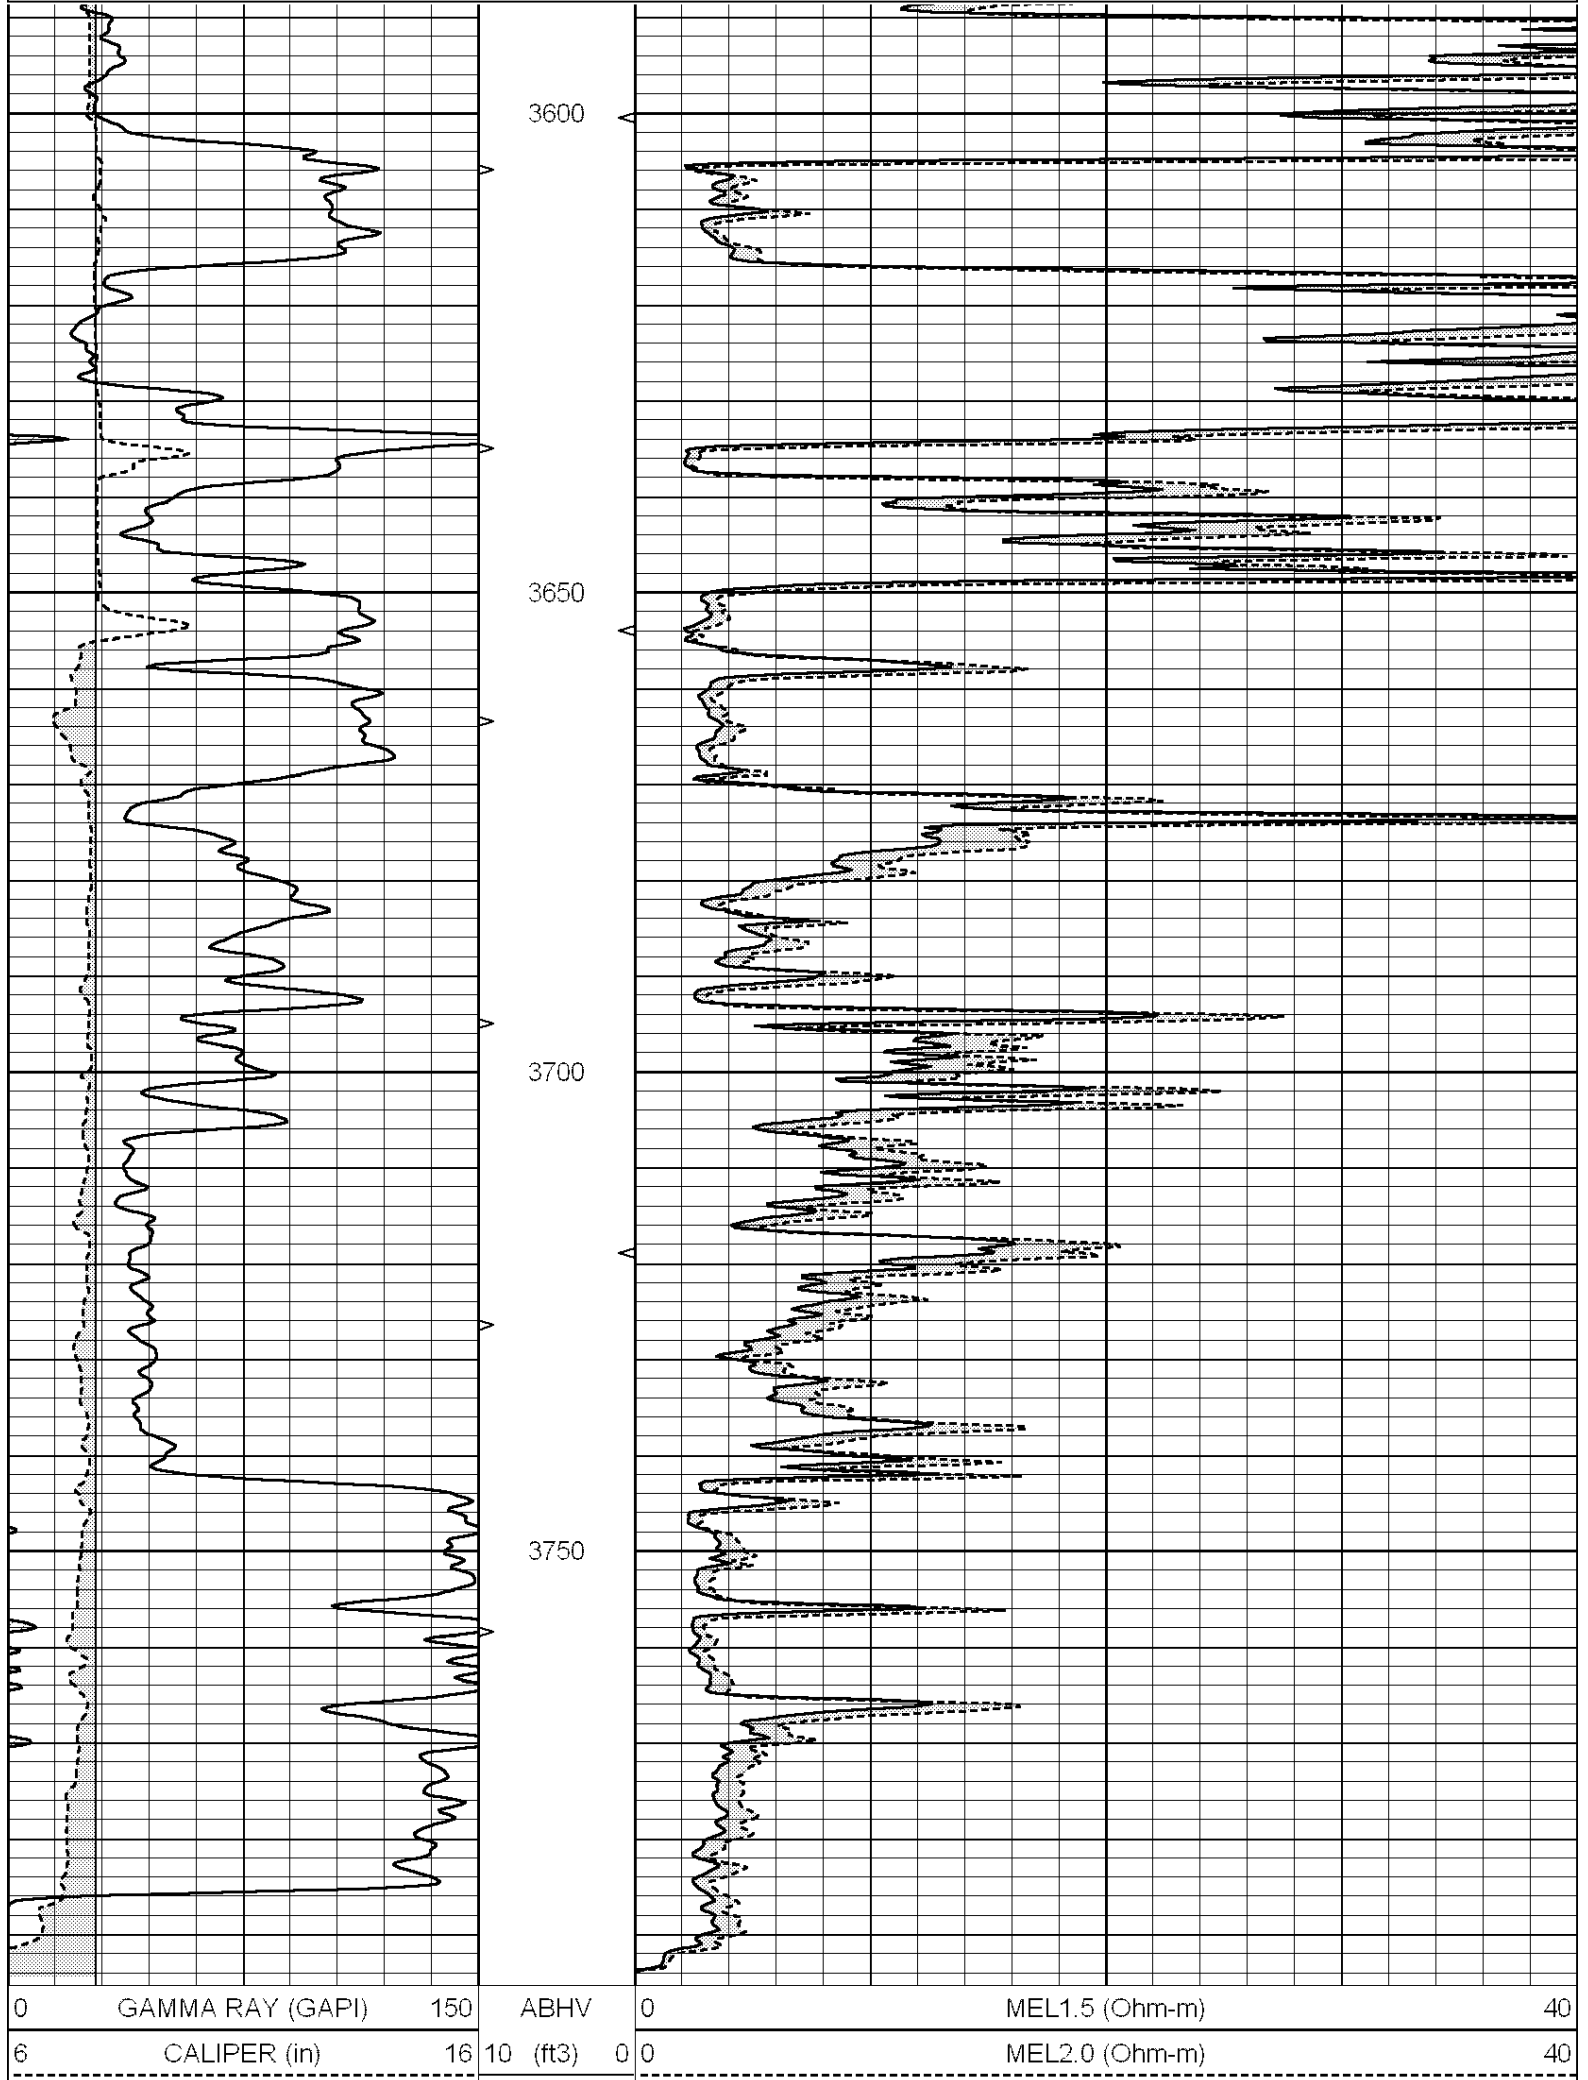

Calibration Report

Database File: 008659mel.db
 Dataset Pathname: pass2.1
 Dataset Creation: Thu Dec 22 09:41:32 2011 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number:	MICRO6	
Tool Model:	PROBE	
Performed:	Wed Dec 14 02:35:39 2011	
Caliper Calibration:	Gain=5.211	Offset=0.360
	Low Cal	High Cal
References	8.000	14.000
Readings	1.178	2.330
1.5" Calibration:	Gain=30.075	Offset=-0.650
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.196
2" Calibration:	Gain=90.041	Offset=-1.800
	Low Cal	High Cal
References	0.000	20.000
Readings	0.006	0.913

Gamma Ray Calibration Report

Serial Number:	#8	
Tool Model:	OPEN	
Performed:	Mon Jun 13 16:56:43 2011	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	175.0	cps
Sensitivity:	0.8371	GAPI/cps