



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	VINCENT OIL CORP.	Company	VINCENT OIL CORPORATION	Location:	API # : 15-057-20910-0000	Other Services CDL/CNL/PE DIL/SON
Well	SHELOR #1-17	Well	SHELOR #1-17	Permanent Datum	GROUND LEVEL	Elevation
Field	WILDCAT	Field	WILDCAT	Log Measured From	KELLY BUSHING 10' A.G.L.	K.B. 2587
County	FORD	County	FORD	Drilling Measured From	KELLY BUSHING	D.F. 2585
State	KANSAS	State	KANSAS			G.L. 2577
Date	9/13/13					
Run Number	TWO					
Depth Driller	5335					
Depth Logger	5334					
Bottom Logged Interval	5312					
Top Log Interval	4150					
Casing Driller	8 5/8"@646'					
Casing Logger	646'					
Bit Size	7 7/8"					
Type Fluid in Hole	CHEMICAL MUD					
Density / Viscosity	9.1/55					
pH / Fluid Loss	10.5/9.2					
Source of Sample	FLOWLINE					
Rim @ Meas. Temp	0.40@80F					
Rmf @ Meas. Temp	0.30@80F					
Rmc @ Meas. Temp	0.48@80F					
Source of Rmf / Rmc	MEASUREMENT					
Rim @ BHT	0.25@128F					
Time Circulation Stopped	2.5 HOURS					
Time Logger on Bottom	9:00 AM					
Maximum Recorded Temperature	128F					
Equipment Number	4854					
Location	HAYS, KANSAS					
Recorded By	JEFF GRONEMEG					
Witnessed By	JIM HALL					

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
BLOOM, KS - 3 MILES WEST TO RD 114 - 3 1/2 MILES NORTH TO WINDY RD
1/4 MILE WEST - SOUTH INTO

Database File: 011670pe.db
Dataset Pathname: pass7.2
Presentation Format: _micro
Dataset Creation: Fri Sep 13 13:00:52 2013 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

Charted by: _____			Depth in Feet scaled 1:2.15			
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16		0	MEL2.0 (Ohm-m)	40

0	MINMK	20	TBHV			
			0 (ft3) 10			

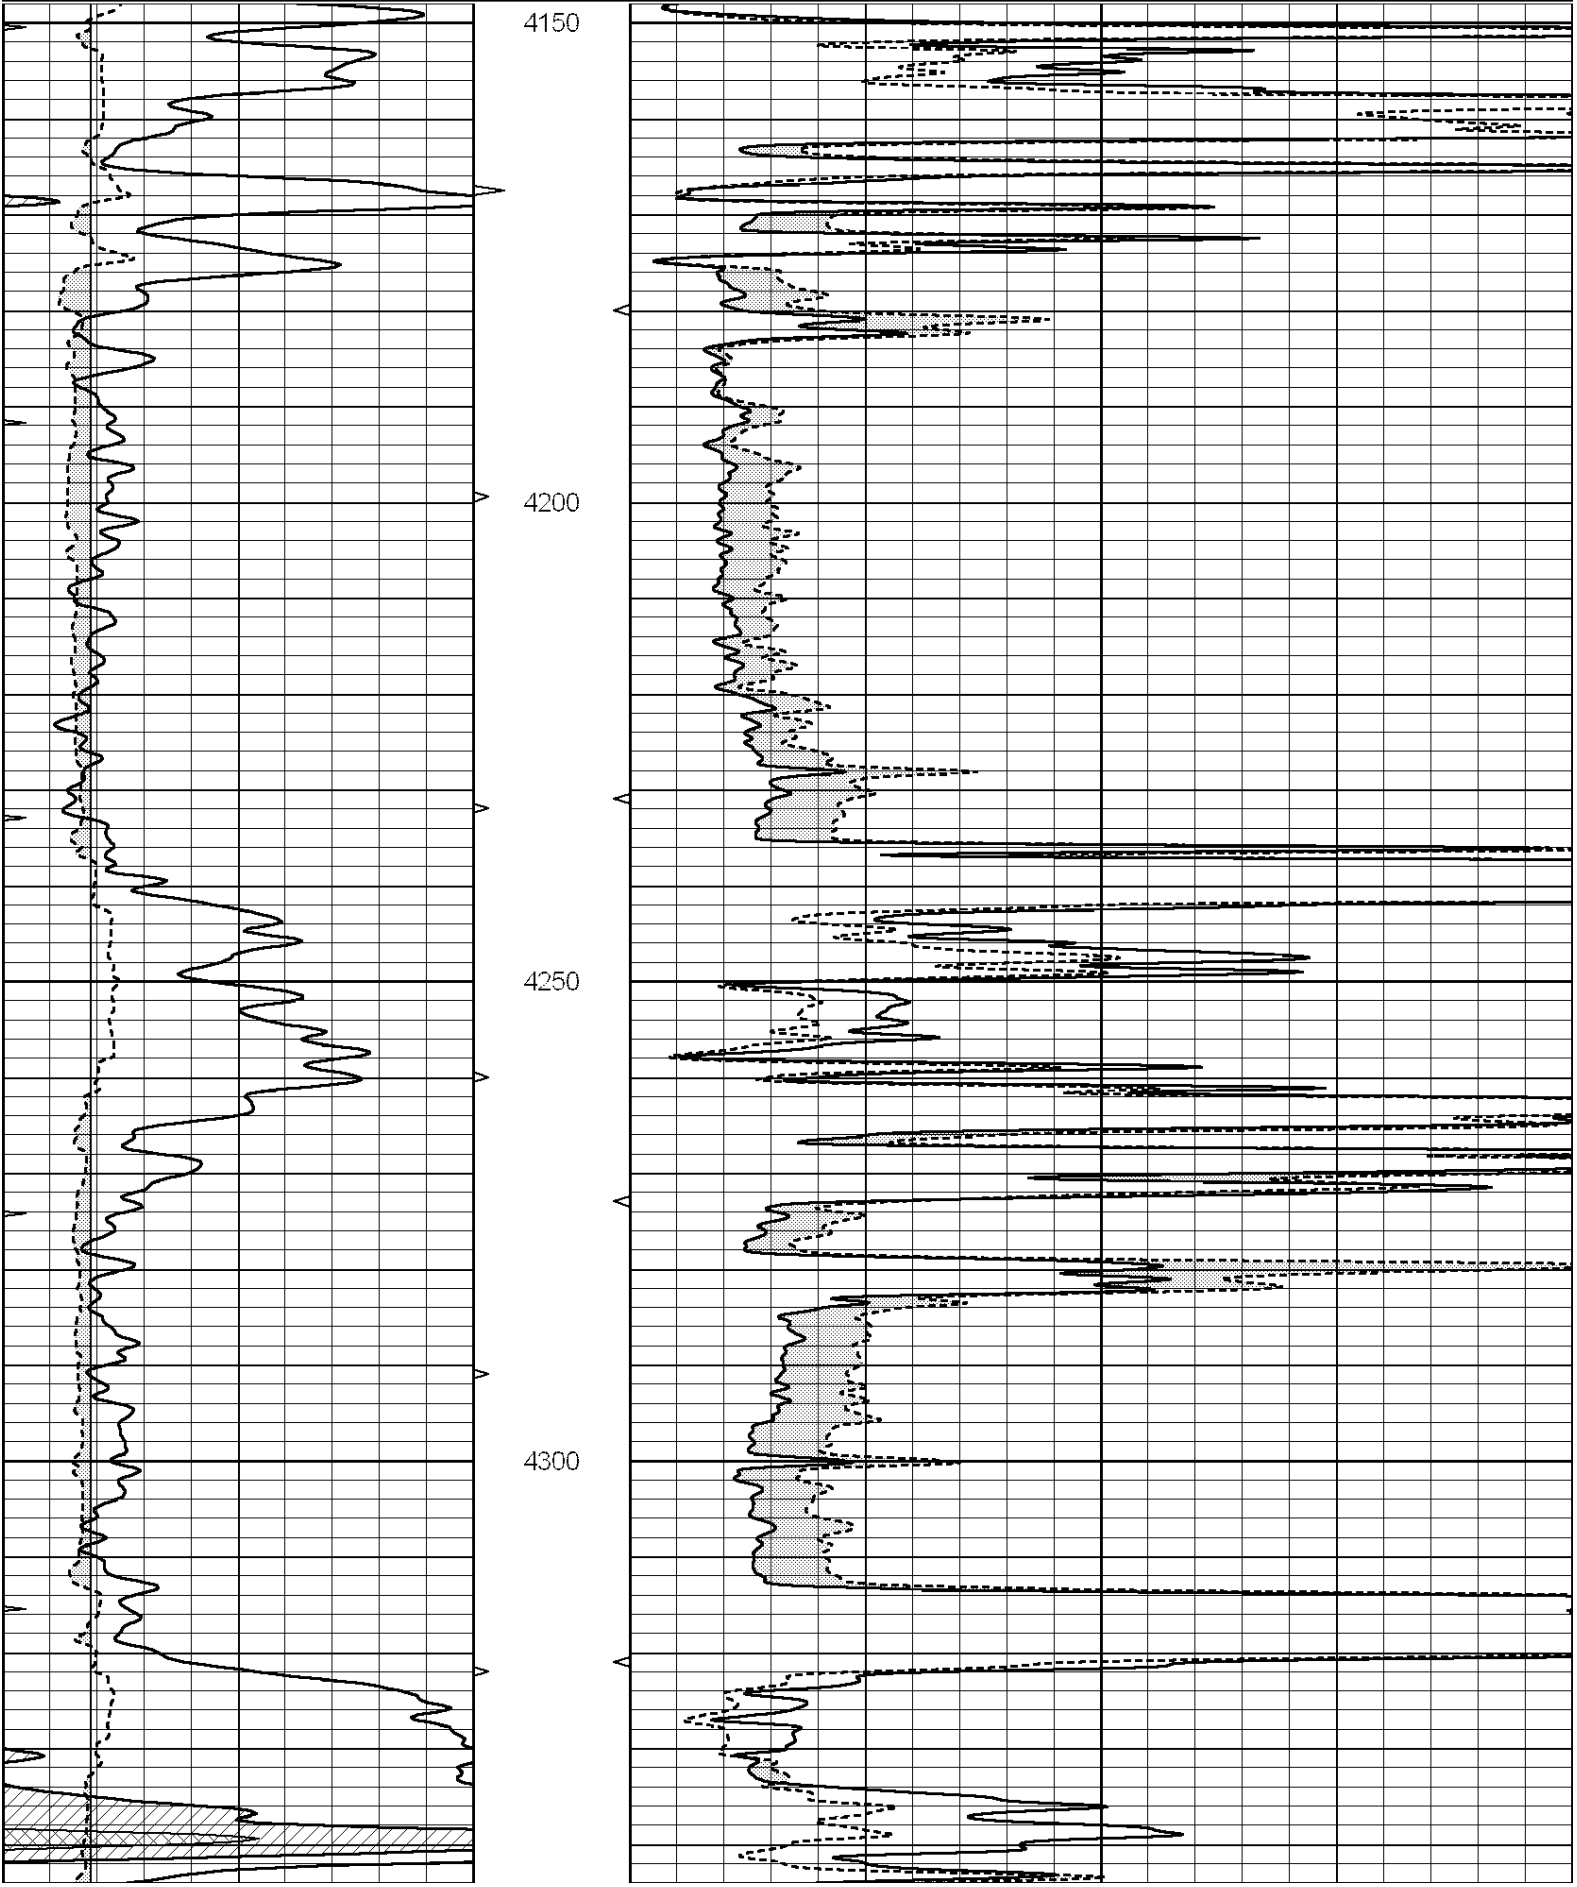

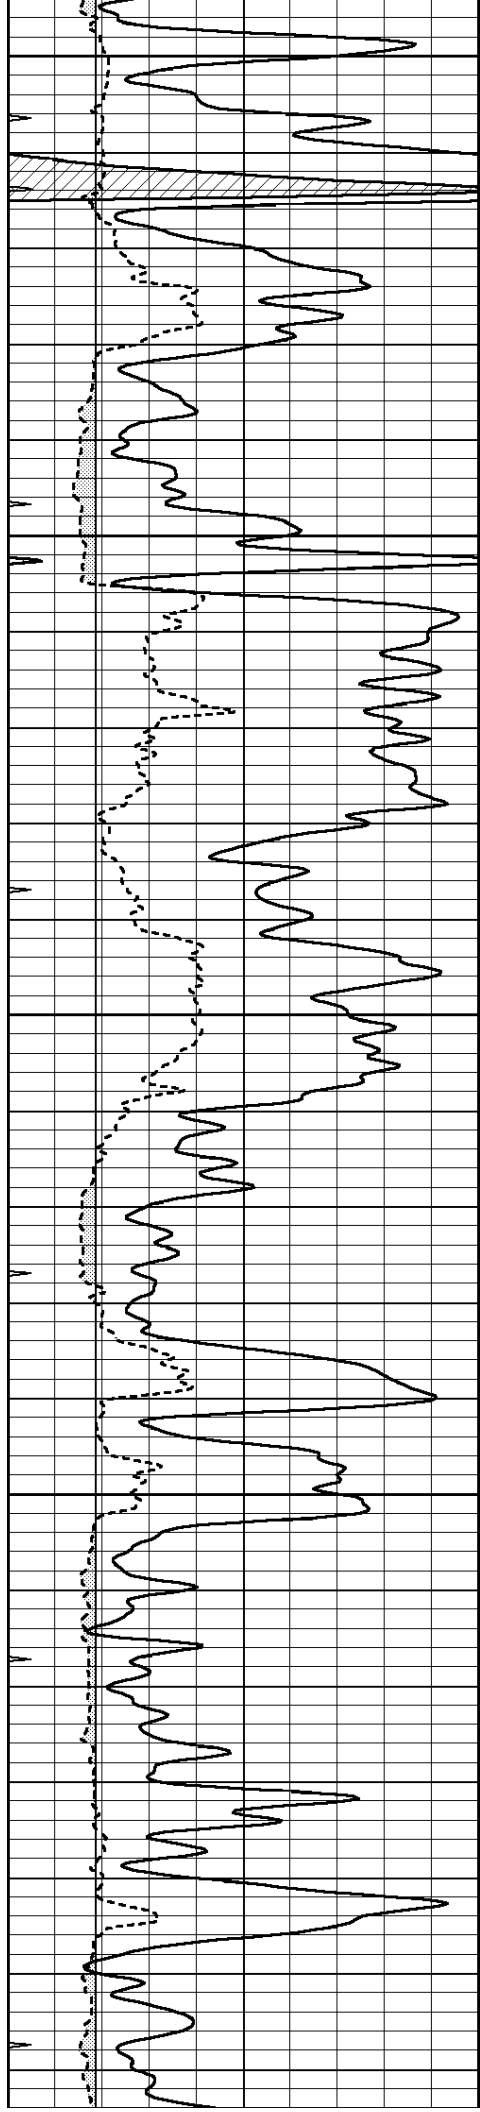


4350


4400

4450

4500

4550

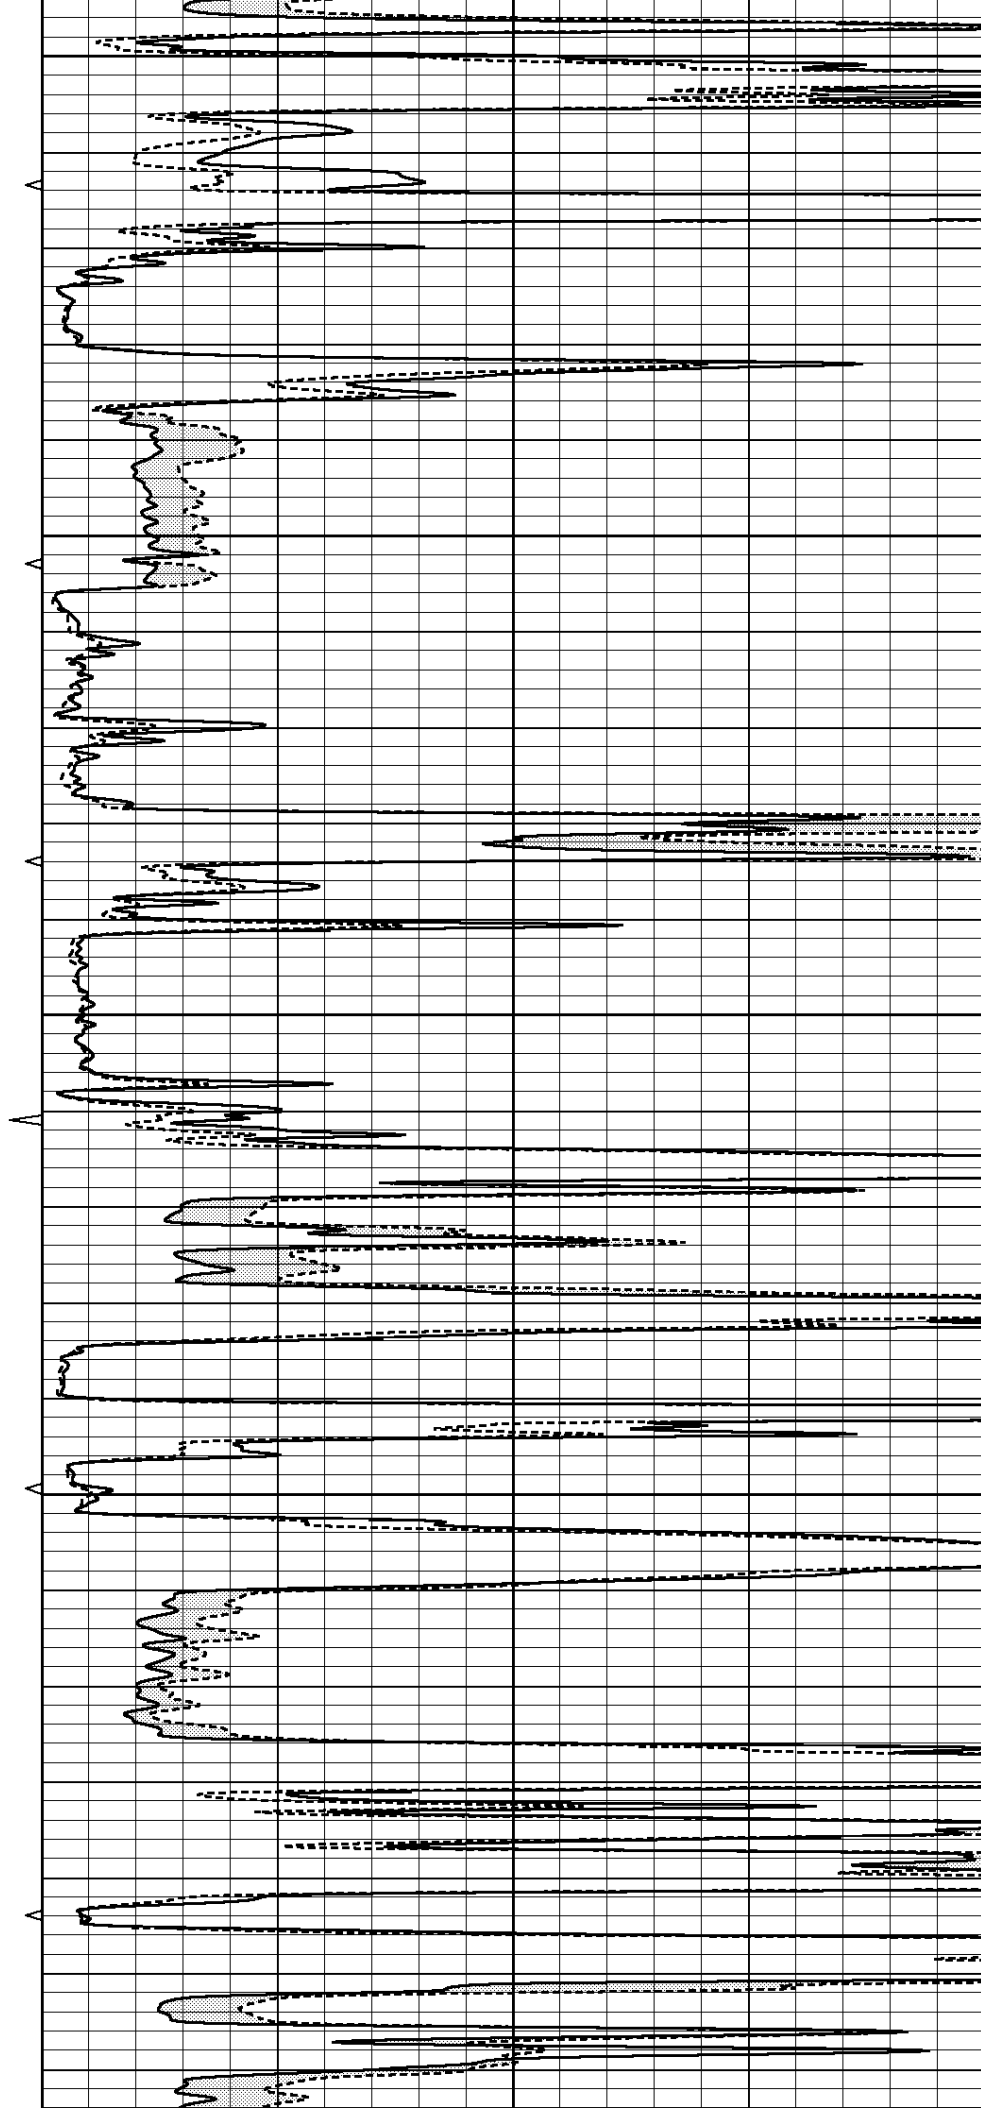

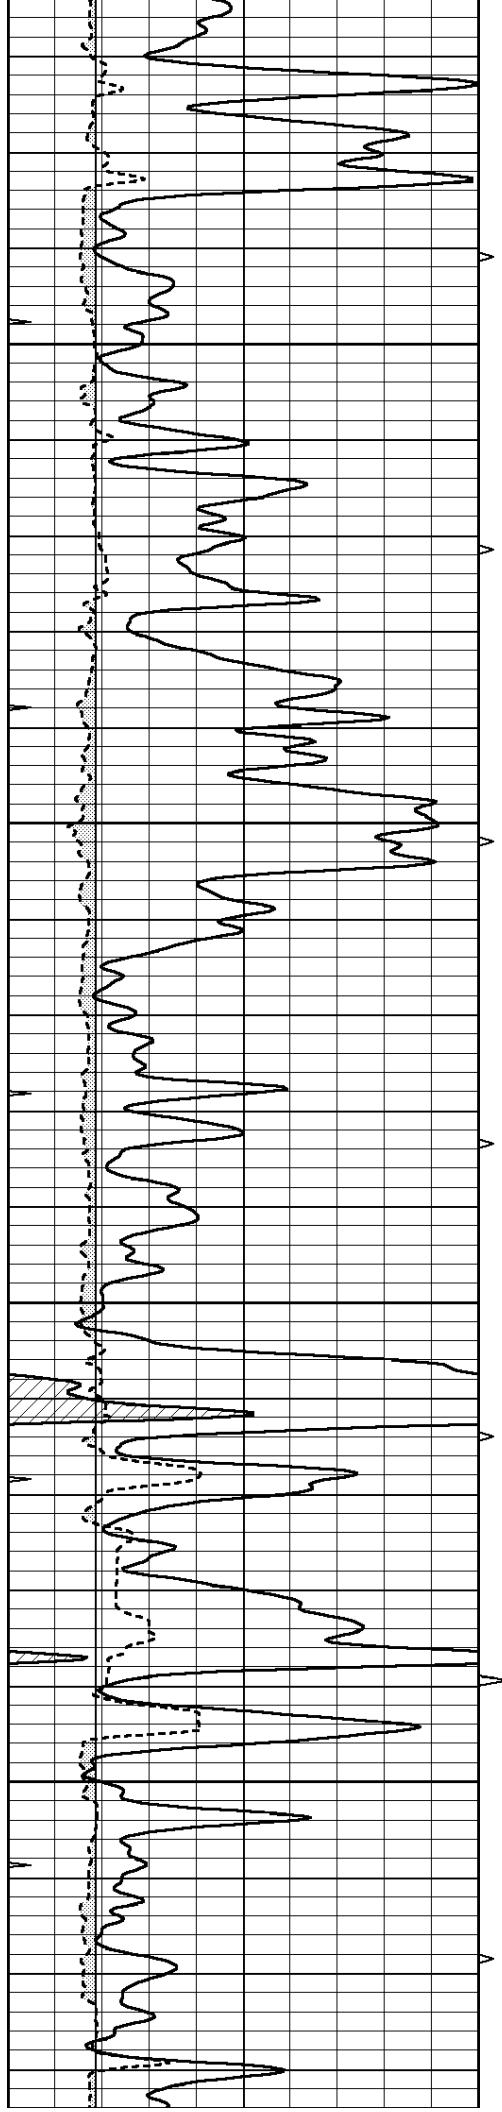



4600

4650

4700

4750

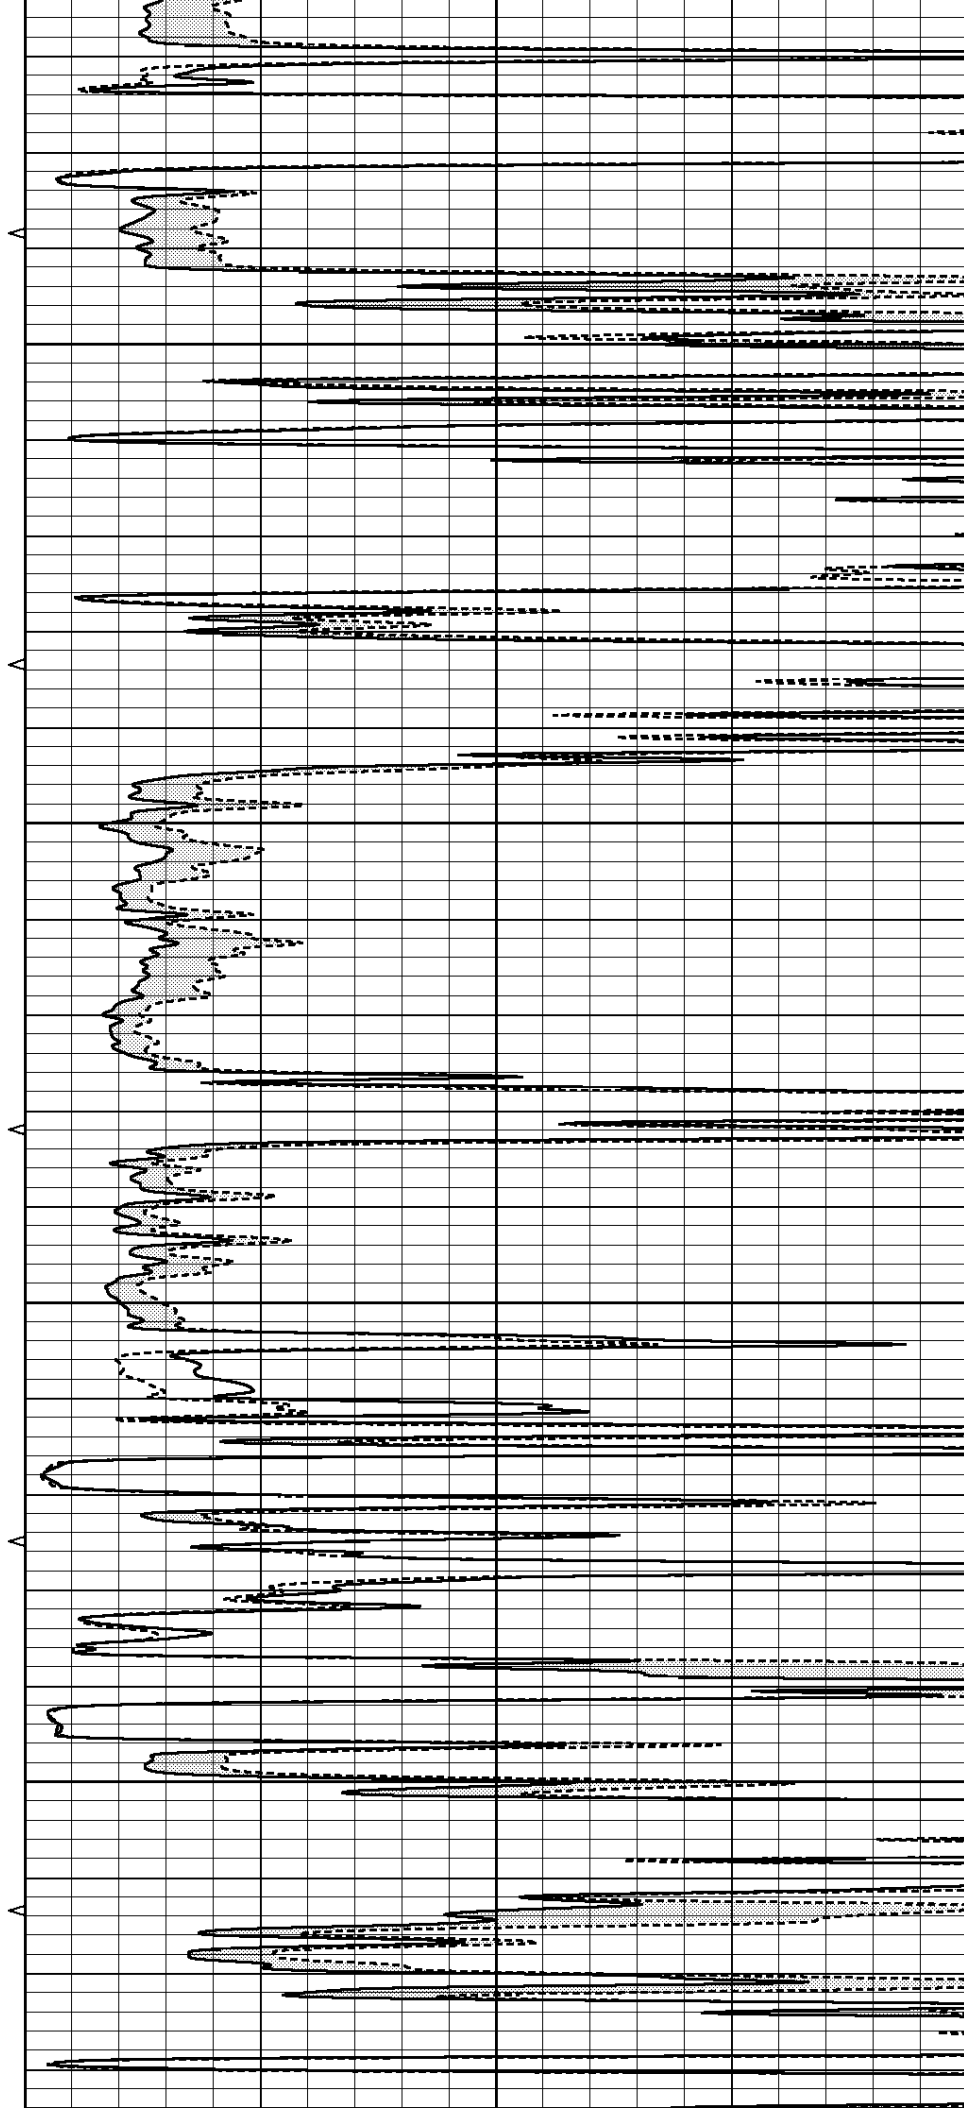

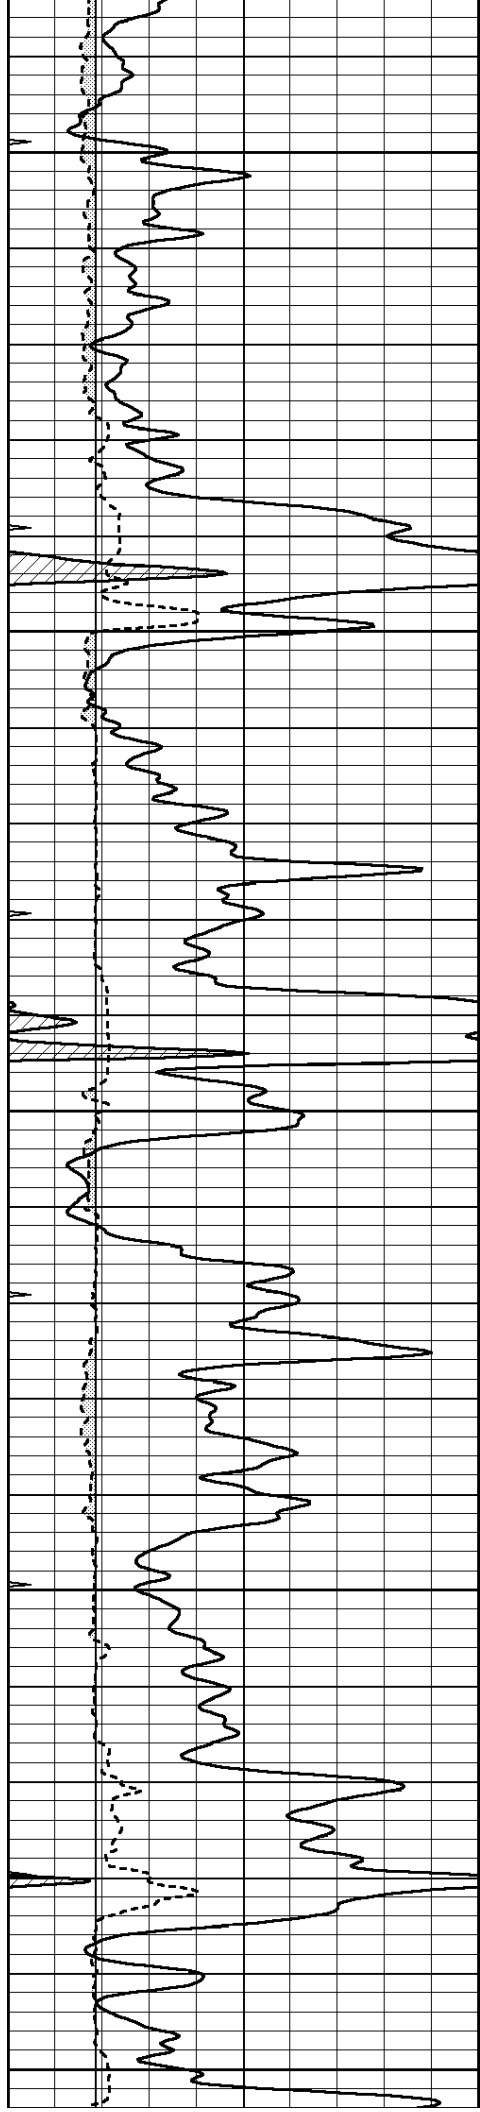


4800


4850

4900

4950

5000

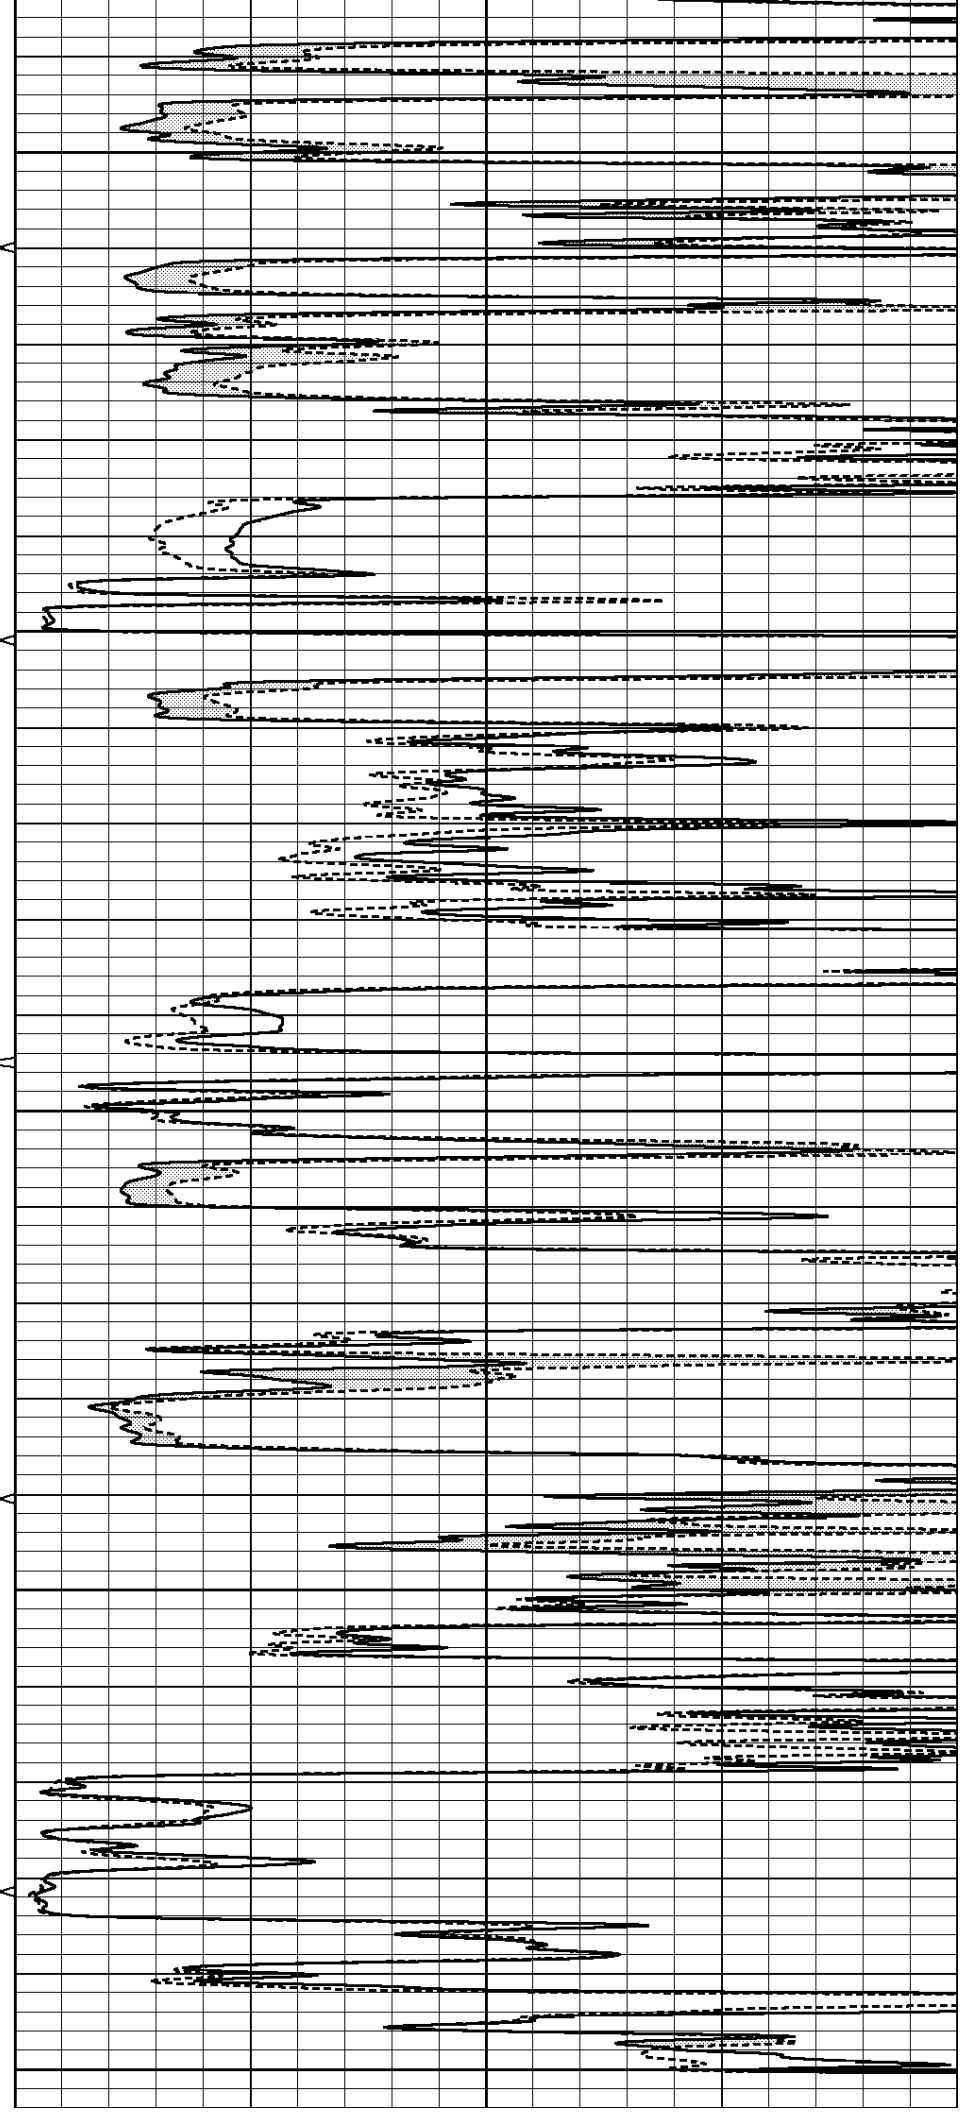

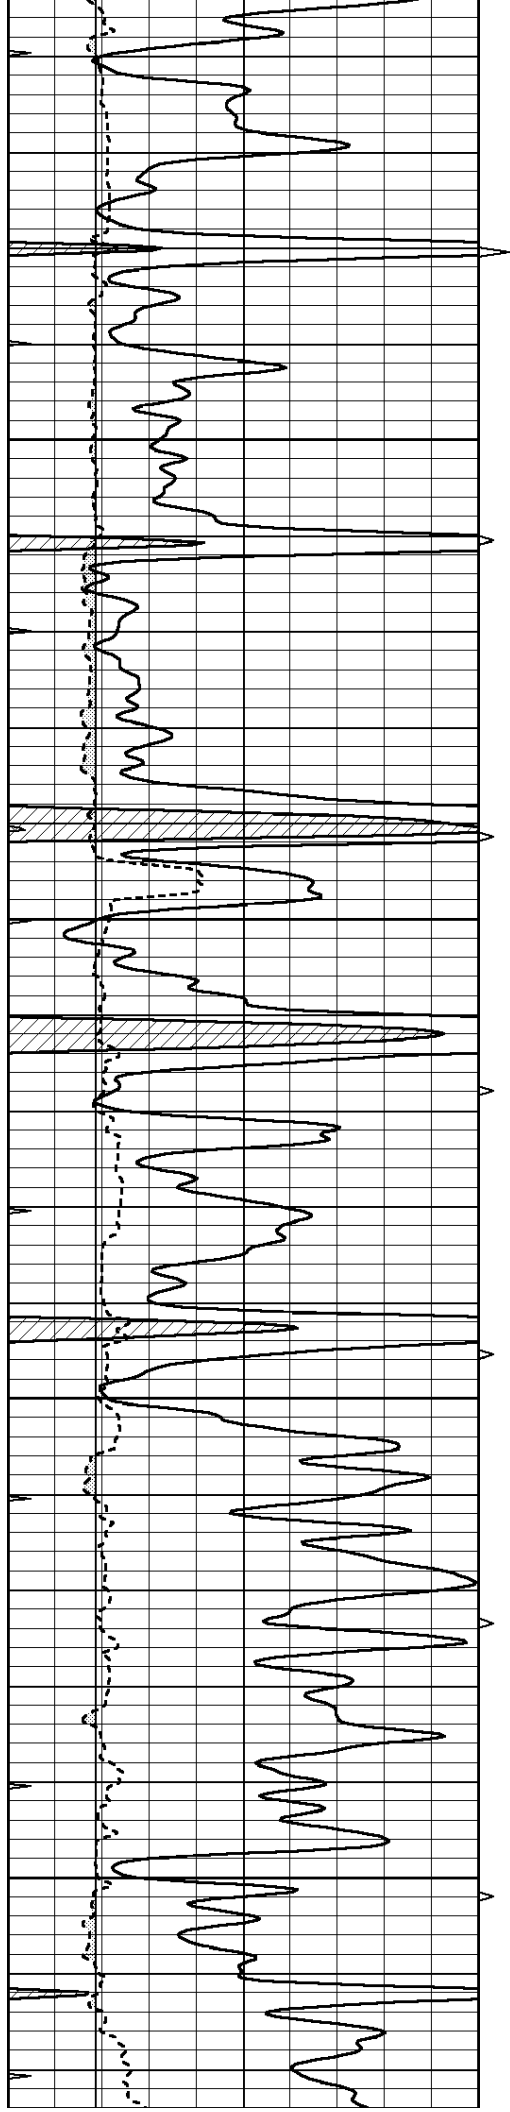



5050

5100

5150

5200

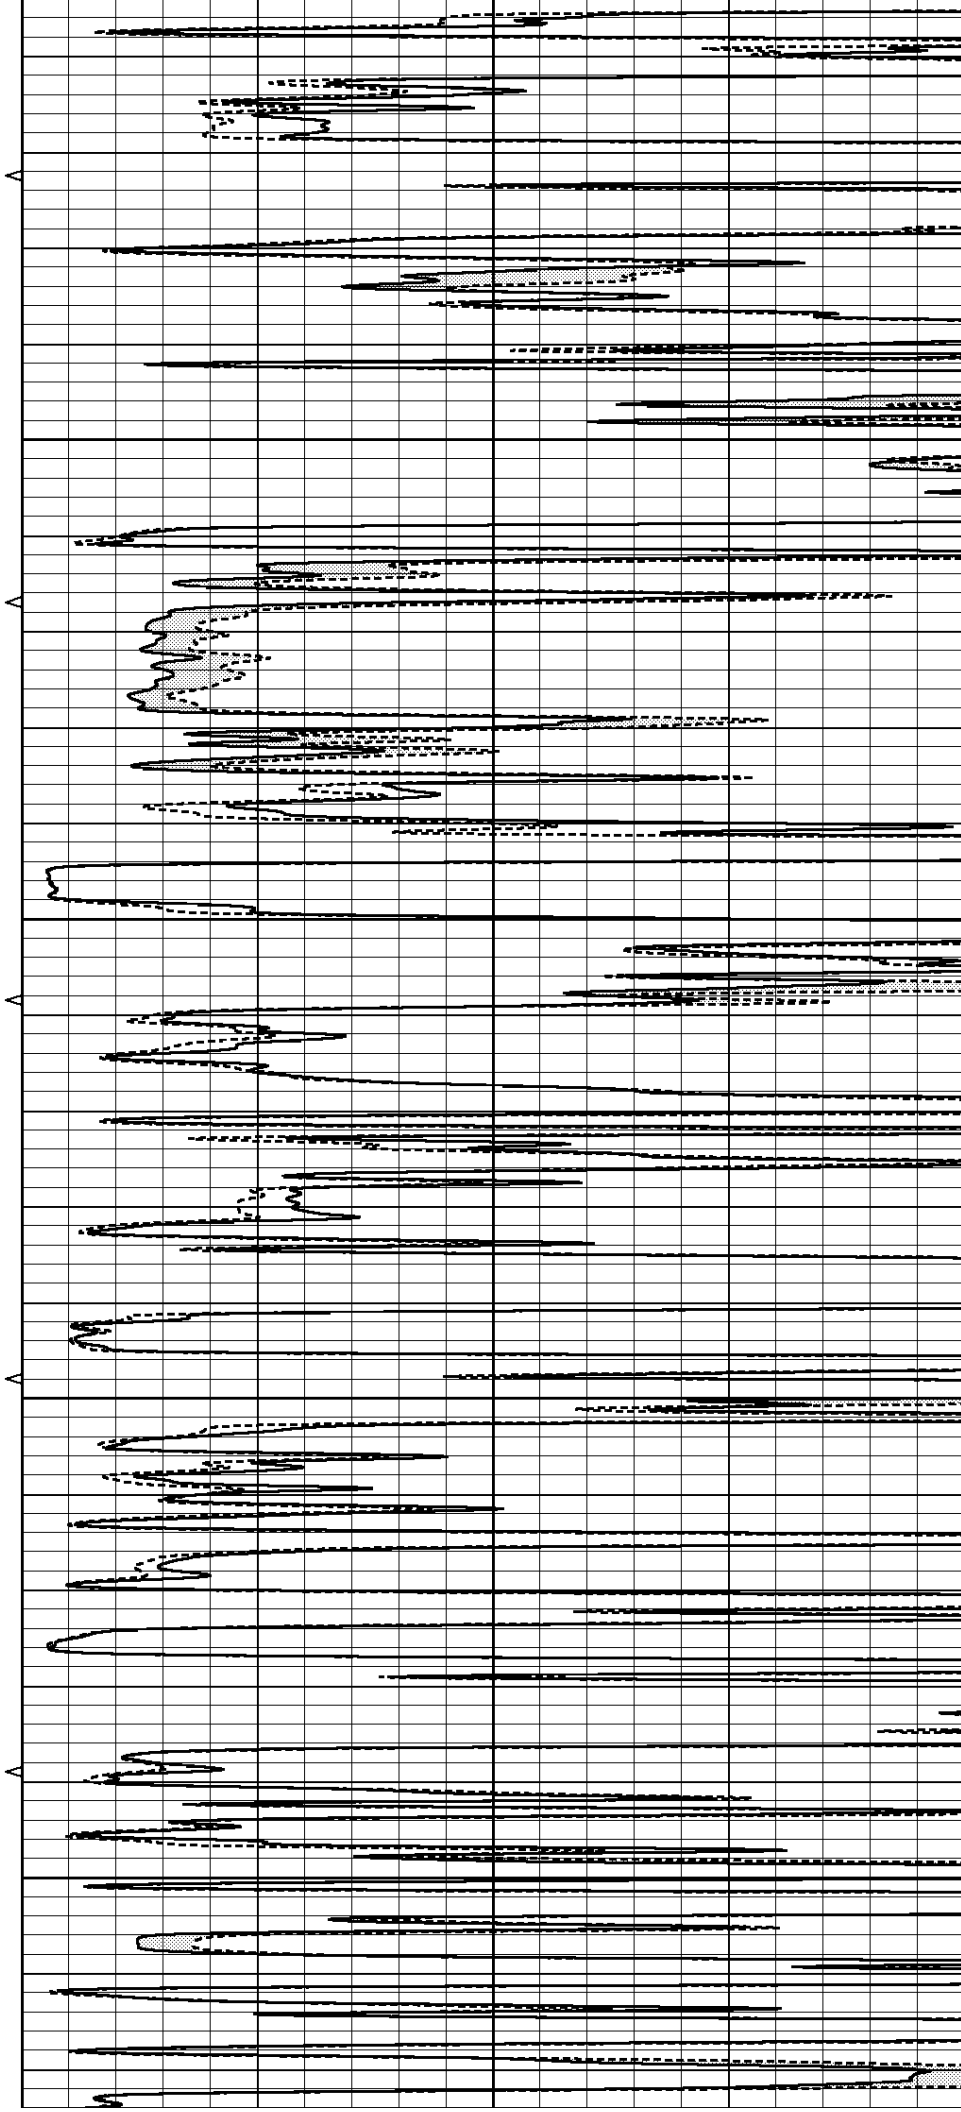

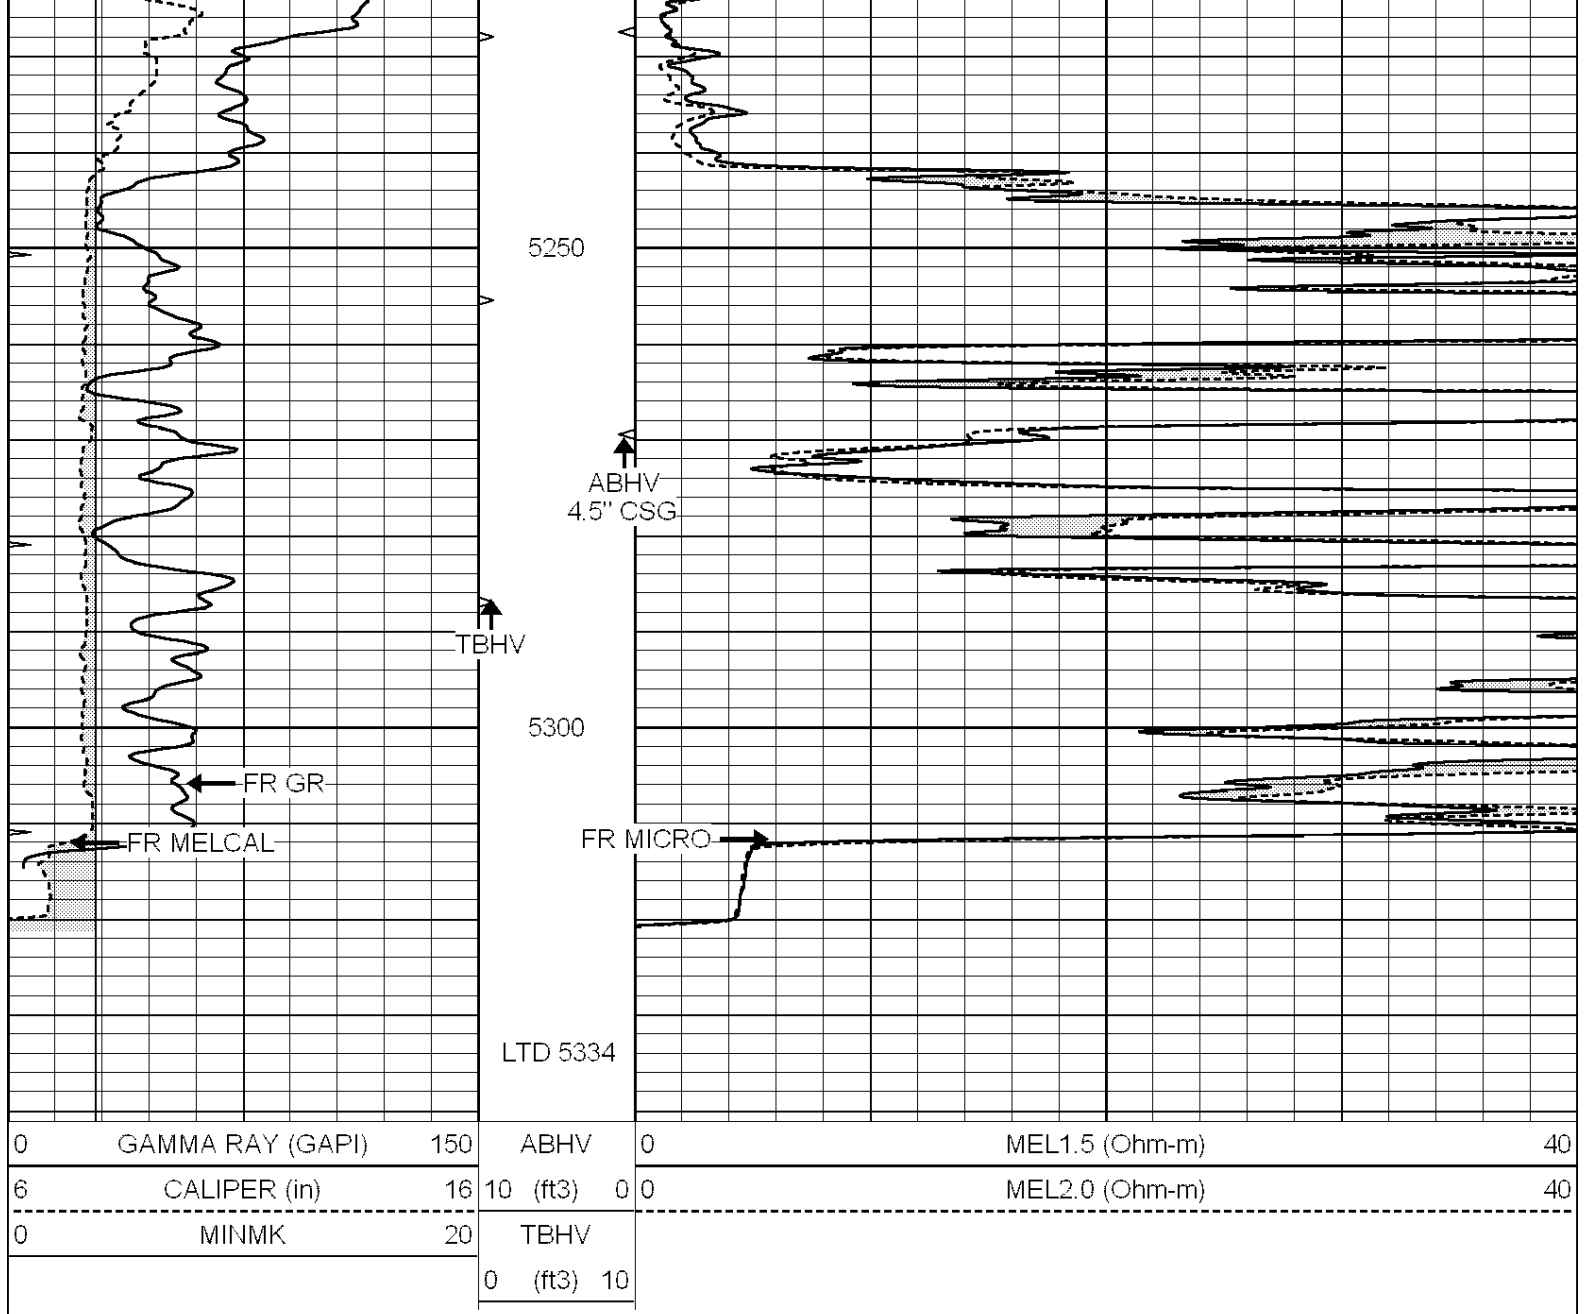



NABORS
COMPLETION
& PRODUCTION
SERVICES CO.

REPEAT SECTION

Database File: 011670pe.db
Dataset Pathname: pass6.1
Presentation Format: _micro
Dataset Creation: Fri Sep 13 12:23:19 2013 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

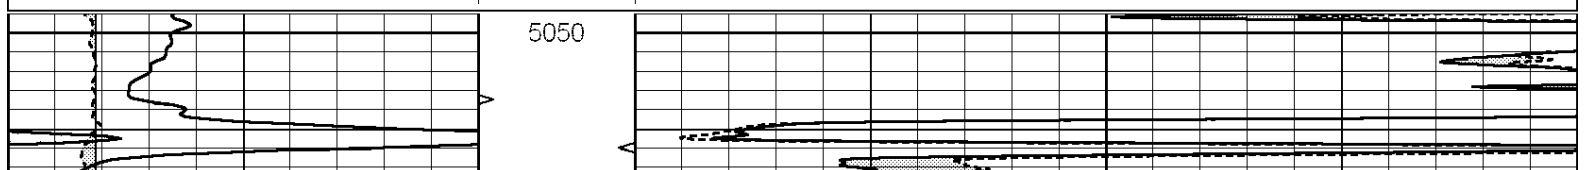

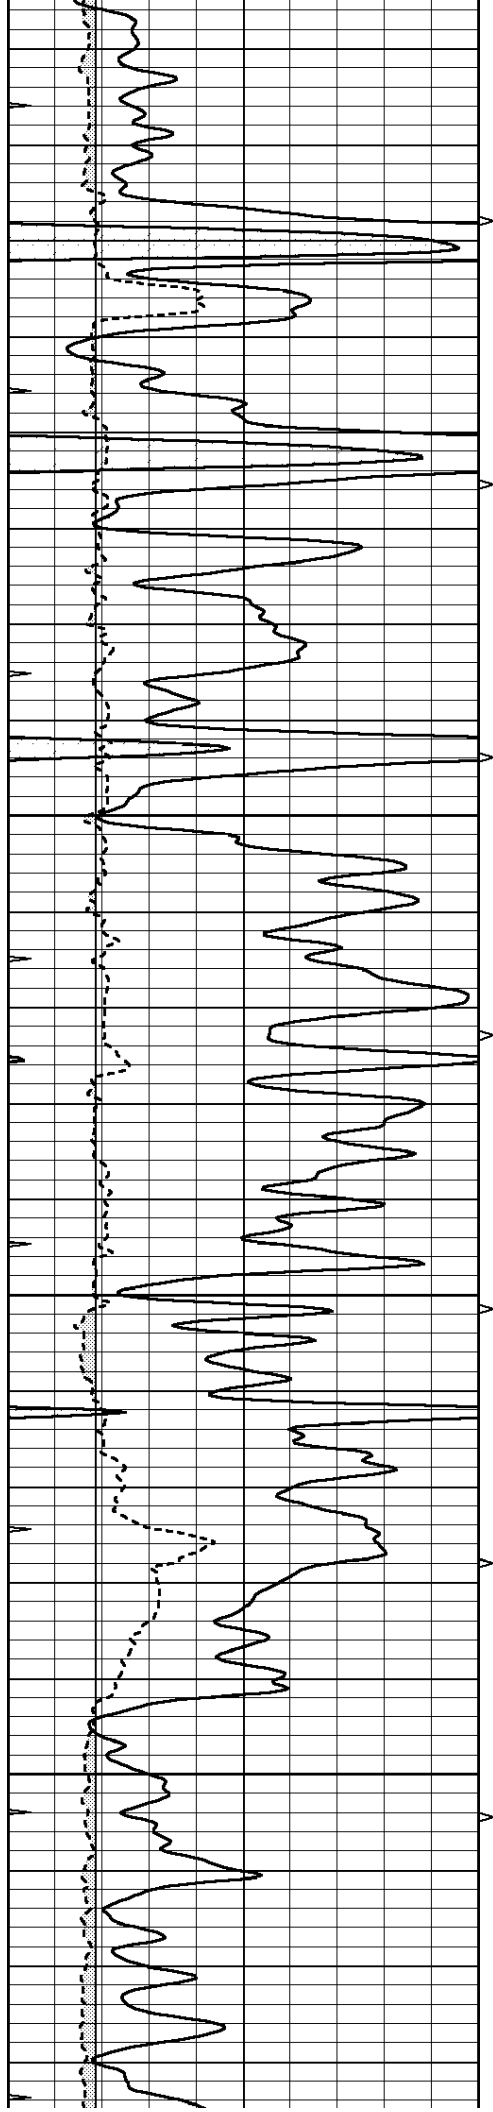



5100

5150

5200

5250

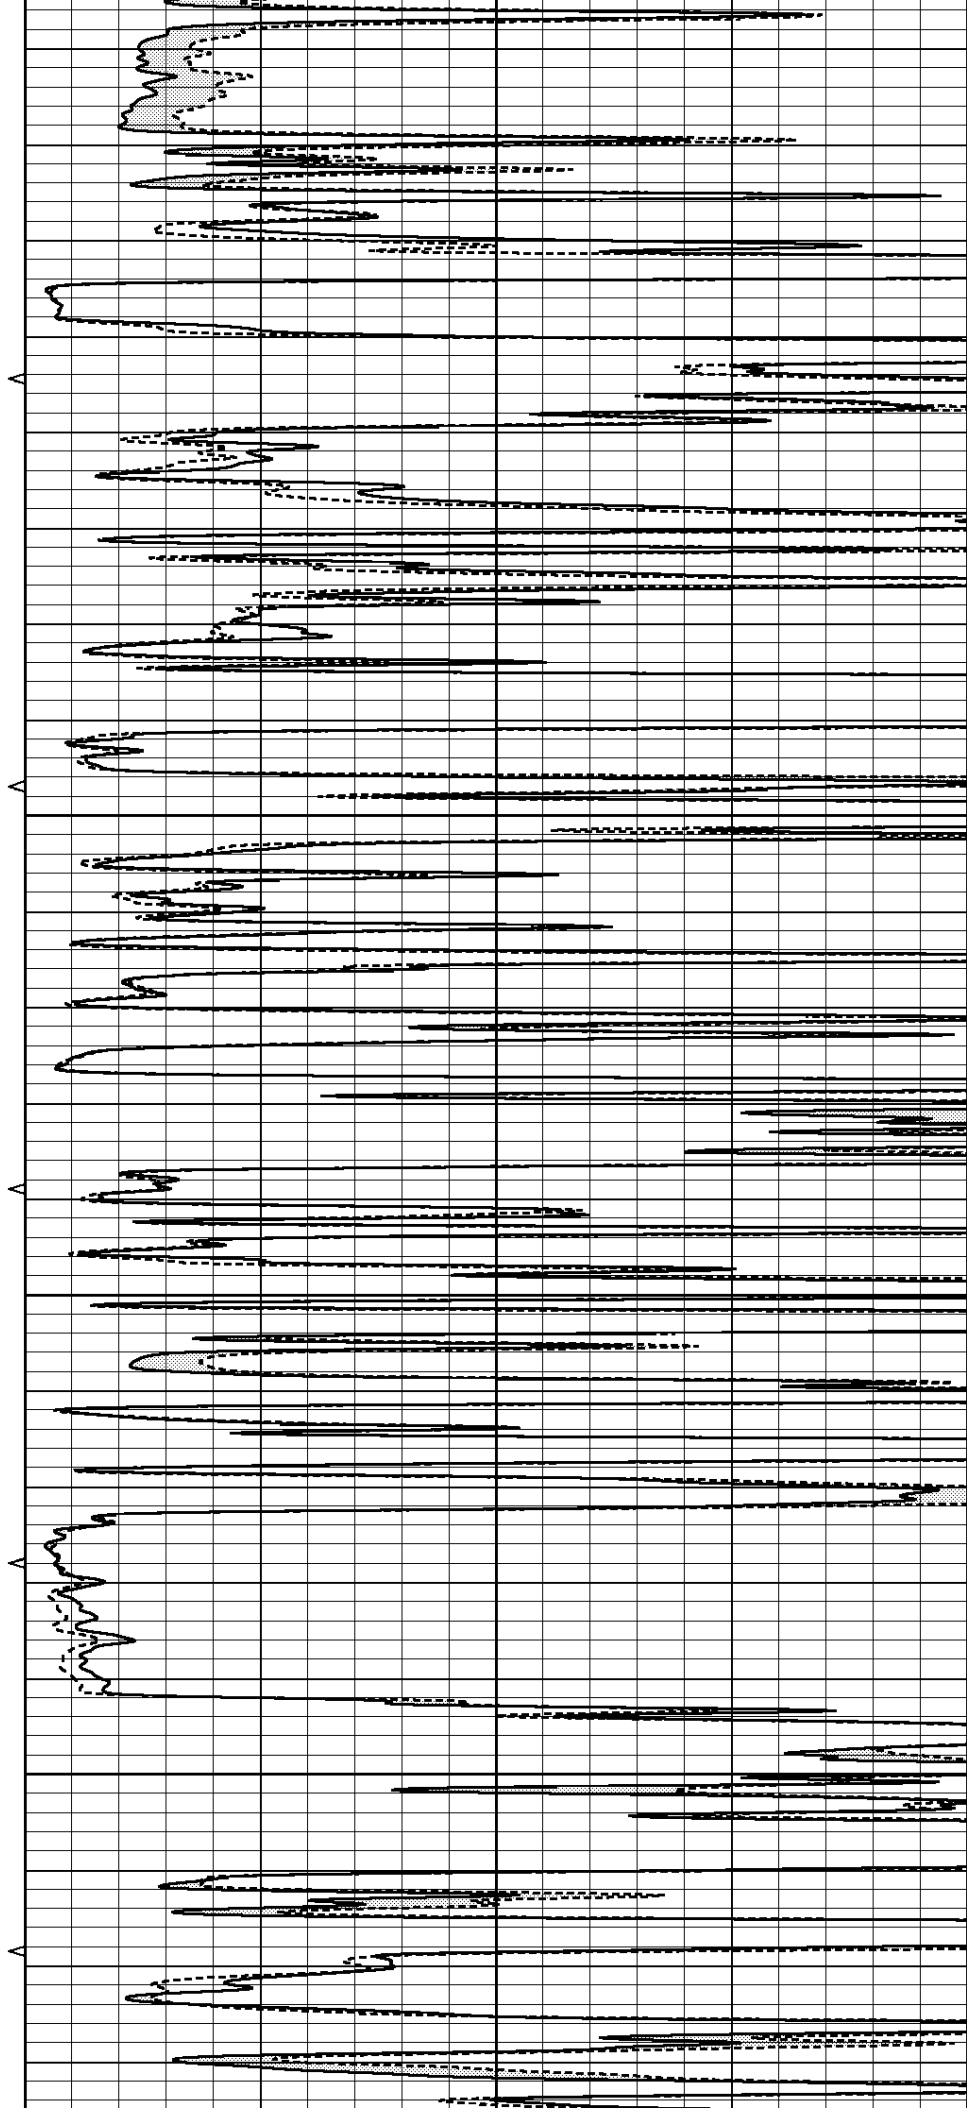

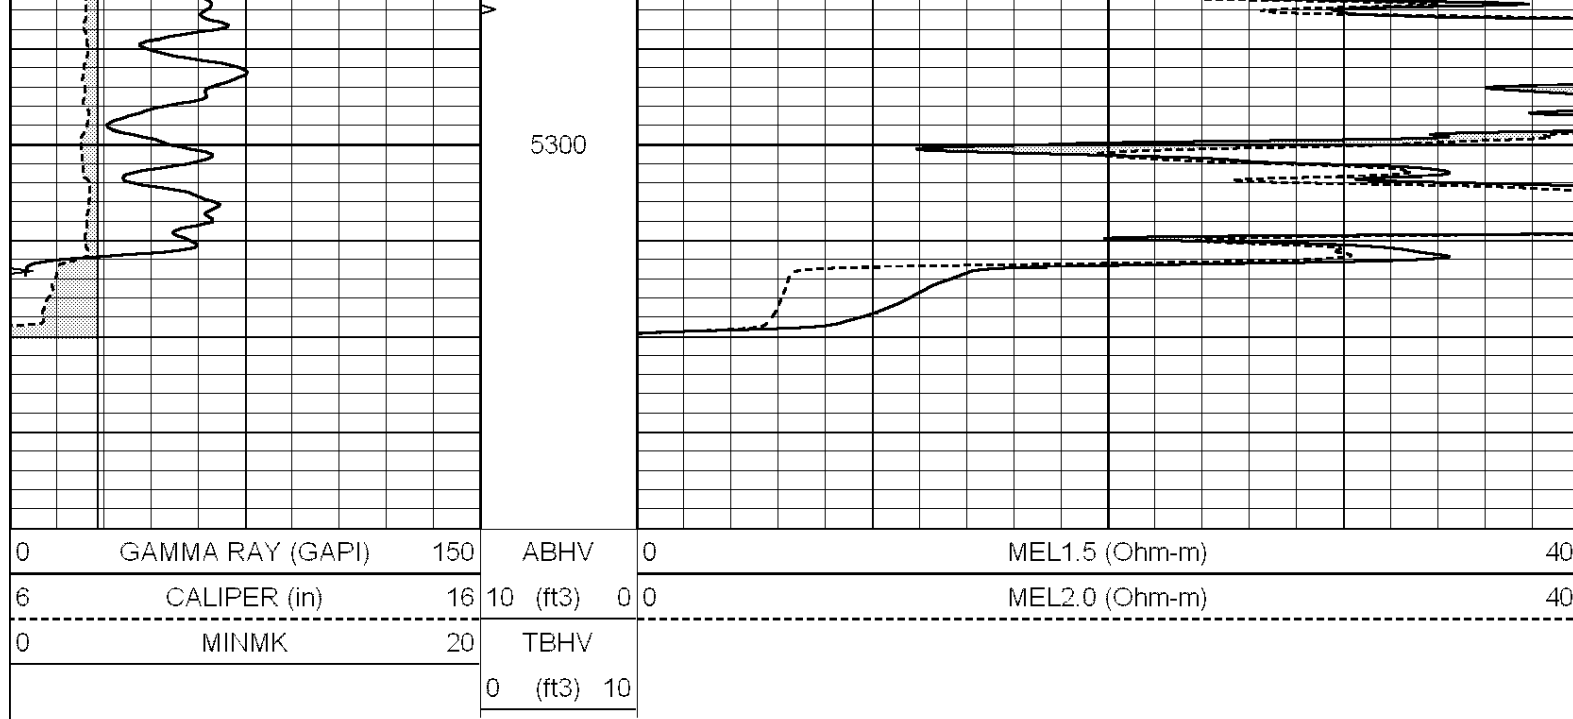

Calibration Report

Database File: 011670pe.db
 Dataset Pathname: pass7.2
 Dataset Creation: Fri Sep 13 13:00:52 2013 by Calc SOC 120430

MICRO Calibration Report

Serial Number: MICRO5
 Tool Model: PROBE
 Performed: Thu Aug 22 06:51:09 2013

Caliper Calibration: Gain=3.605 Offset=-6.802
 References Low Cal High Cal
 8.000 15.000
 Readings 4.106 6.048

1.5" Calibration: Gain=42.000 Offset=-1.000
 References Low Cal High Cal
 0.000 20.000
 Readings 0.015 1.005

2" Calibration: Gain=55.000 Offset=-1.200
 References Low Cal High Cal
 0.000 20.000
 Readings 0.009 0.910

Gamma Ray Calibration Report

Serial Number: GR3
 Tool Model: OPEN
 Performed: Wed Sep 11 05:02:31 2013

Calibrator Value: 200.0 GAPI
 Background Reading: 3.0 cps
 Calibrator Reading: 186.0 cps
 Sensitivity: 1.4000 GAPI/cps