

**NABORS****COMPLETION
& PRODUCTION
SERVICES CO.****COMPENSATED
DENSITY / NEUTRON
LOG**

Company	PROLIFIC RESOURCES, LLC.		
Well	ROESLER "B" #1		
Field	WILDCAT		
County	PAWNEE		
State	KANSAS		
Location:	AP1 # : 15-145-21779-0000		Other Services
	660' FNL & 1320' FWL		DIL/MEL
	N/2 - NW		
	SEC 11 TWP 22S RGE 18W		
Permanent Datum	GROUND LEVEL	Elevation	2042
Log Measured From	KELLY BUSHING 5' A.G.L.		
Drilling Measured From	KELLY BUSHING		
		Elevation	K.B. 2047 D.F. 2045 G.L. 2042
Date	10/3/14		
Run Number	ONE		
Depth Driller	4330		
Depth Logger	4327		
Bottom Logged Interval	4303		
Top Log Interval	3500		
Casing Driller	8 5/8"@1109'		
Casing Logger	1110		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,600 PPM	
Density / Viscosity	9.2/58		
pH / Fluid Loss	10.0/8.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.600@80F		
Rmf @ Meas. Temp	.450@80F		
Rmc @ Meas. Temp	.720@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.403@119F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	8:45 A.M.		
Maximum Recorded Temperature	119F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BOB STOLZLE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
(HWY 183 & 156 JUNCTION) 2S. TO "RD. L", 2 1/2E., S. INTO THEN BACK WEST

**NABORS**
**COMPLETION
& PRODUCTION****MAIN SECTION**

Database File:

25889ddn.db

Dataset Pathname:

pass3.5

Presentation Format:

den_neu


Dataset Creation:


Fri Oct 03 10:04:11 2014

Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

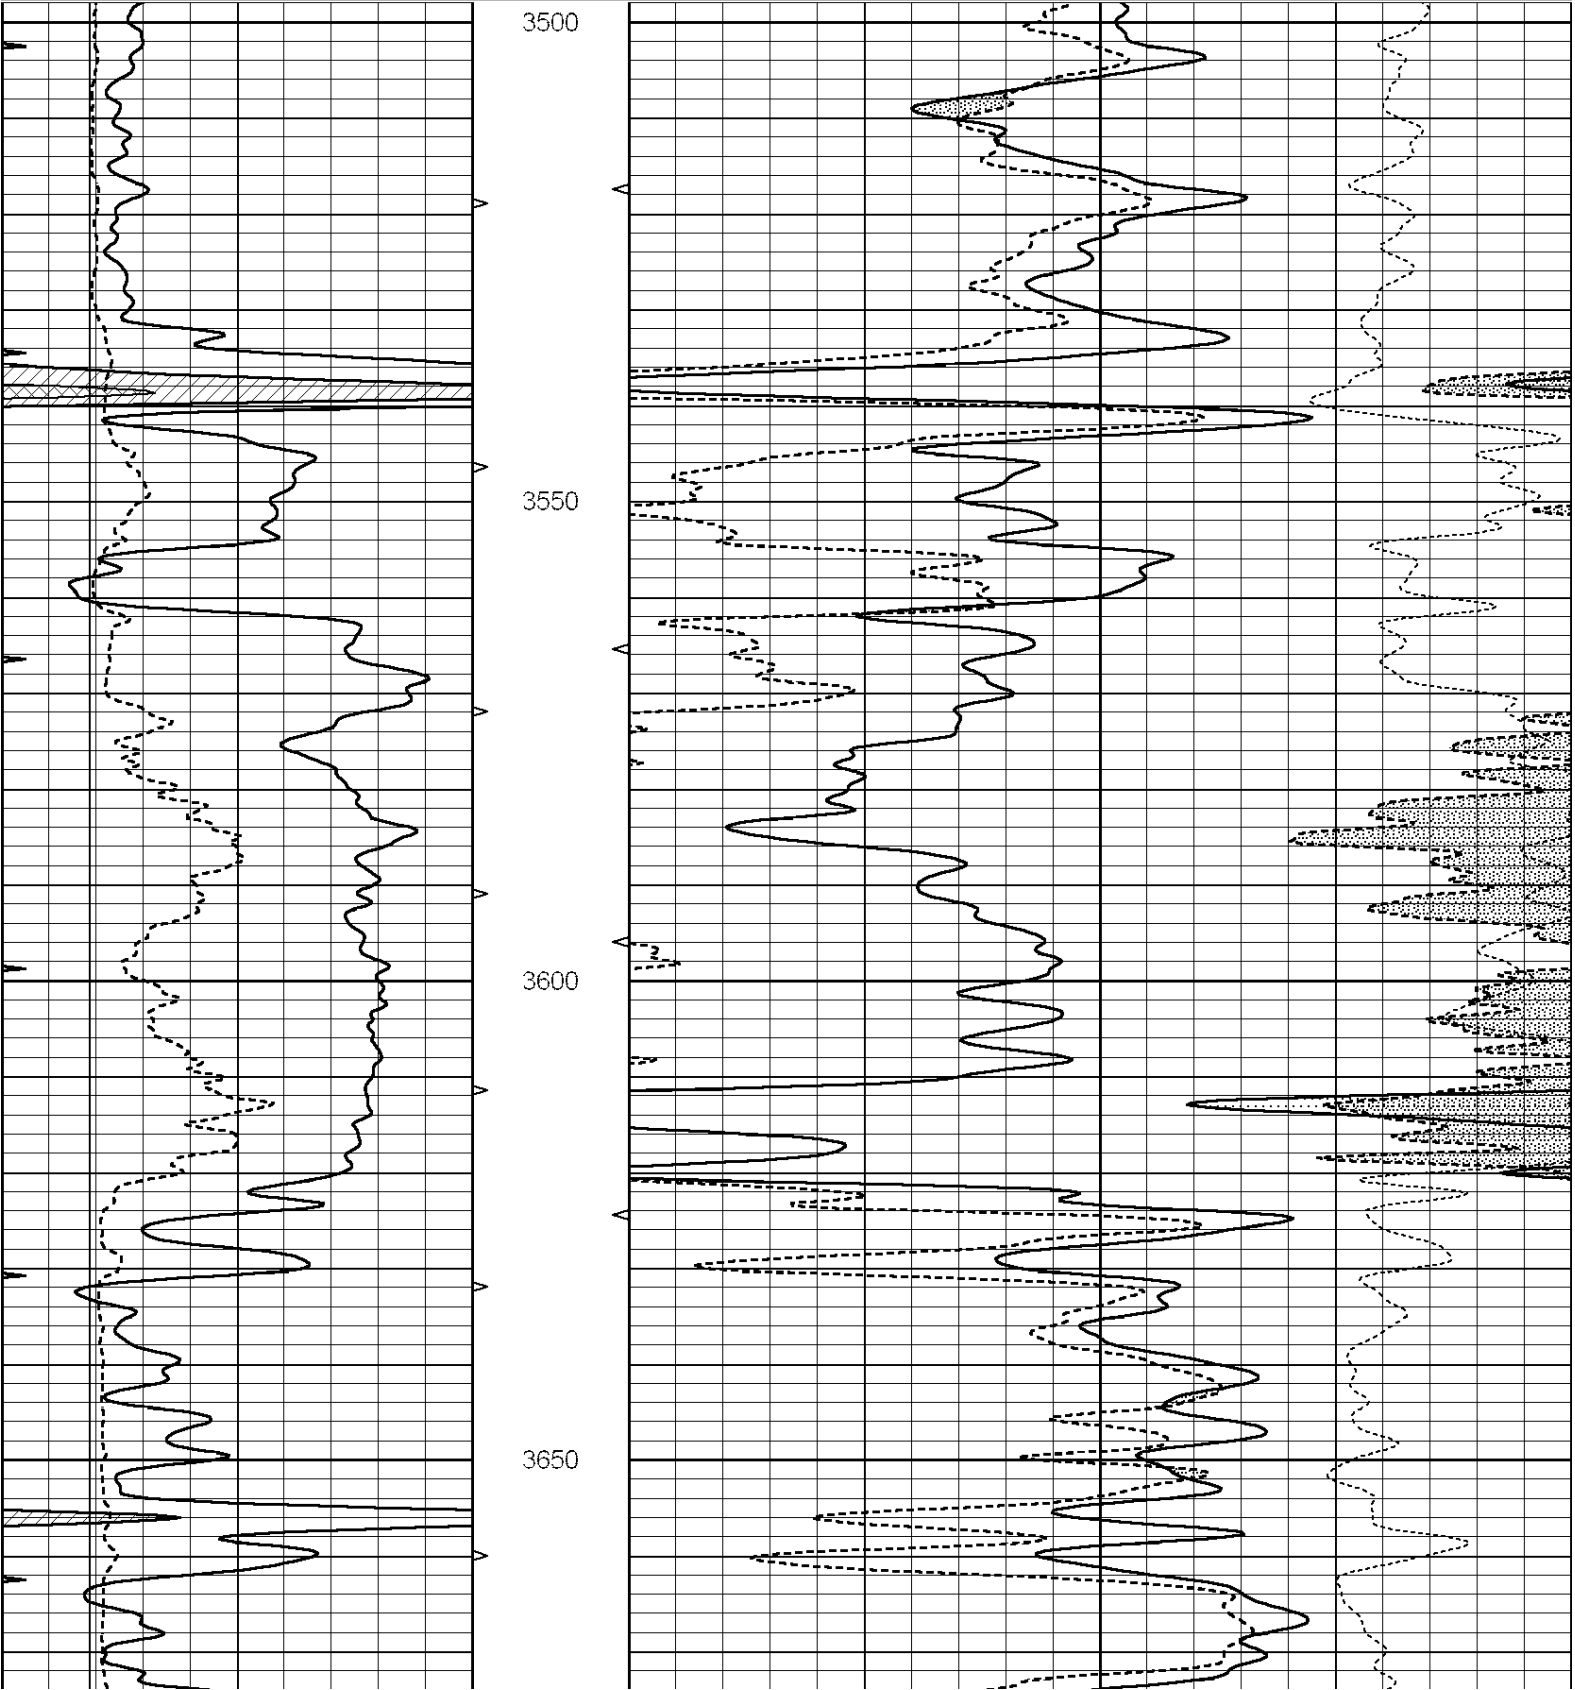

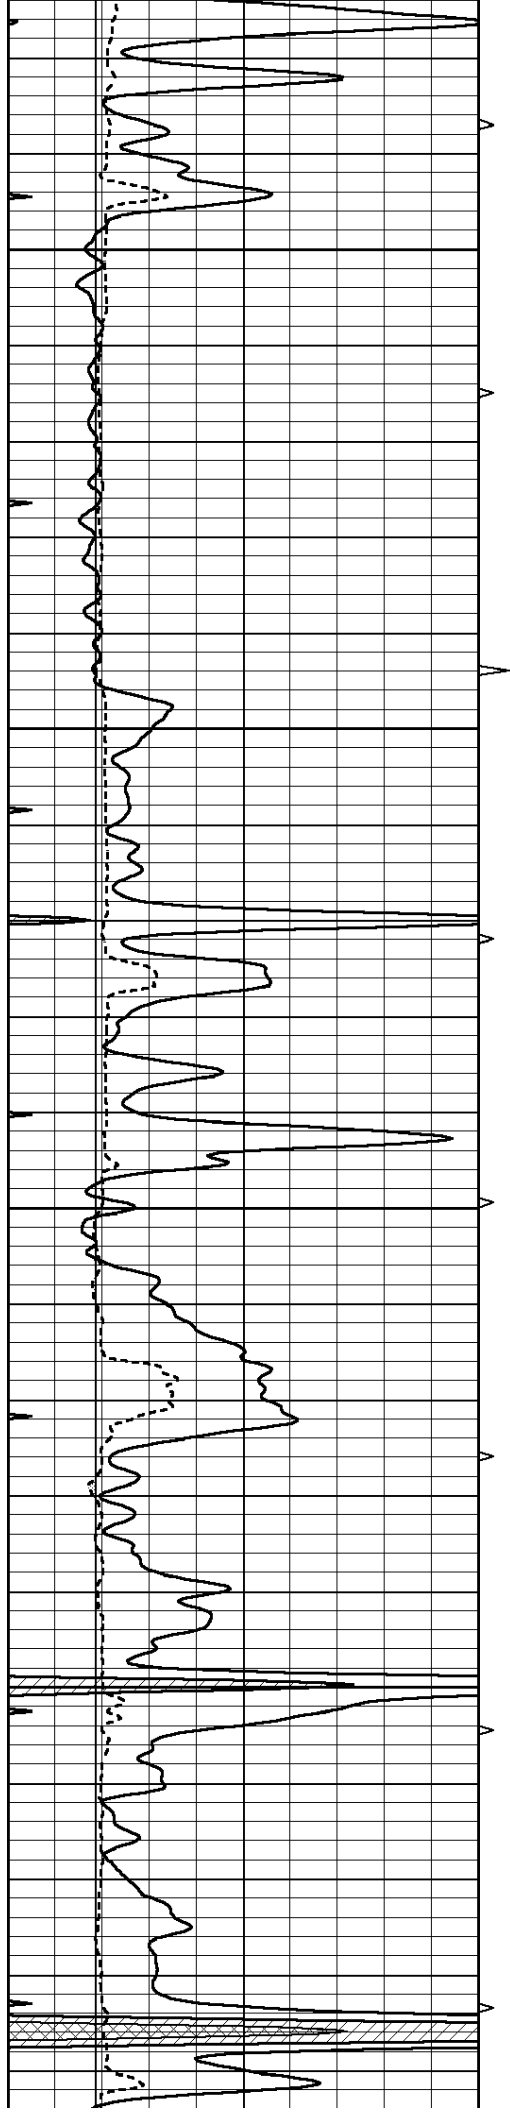



3700


3750

3800

3850

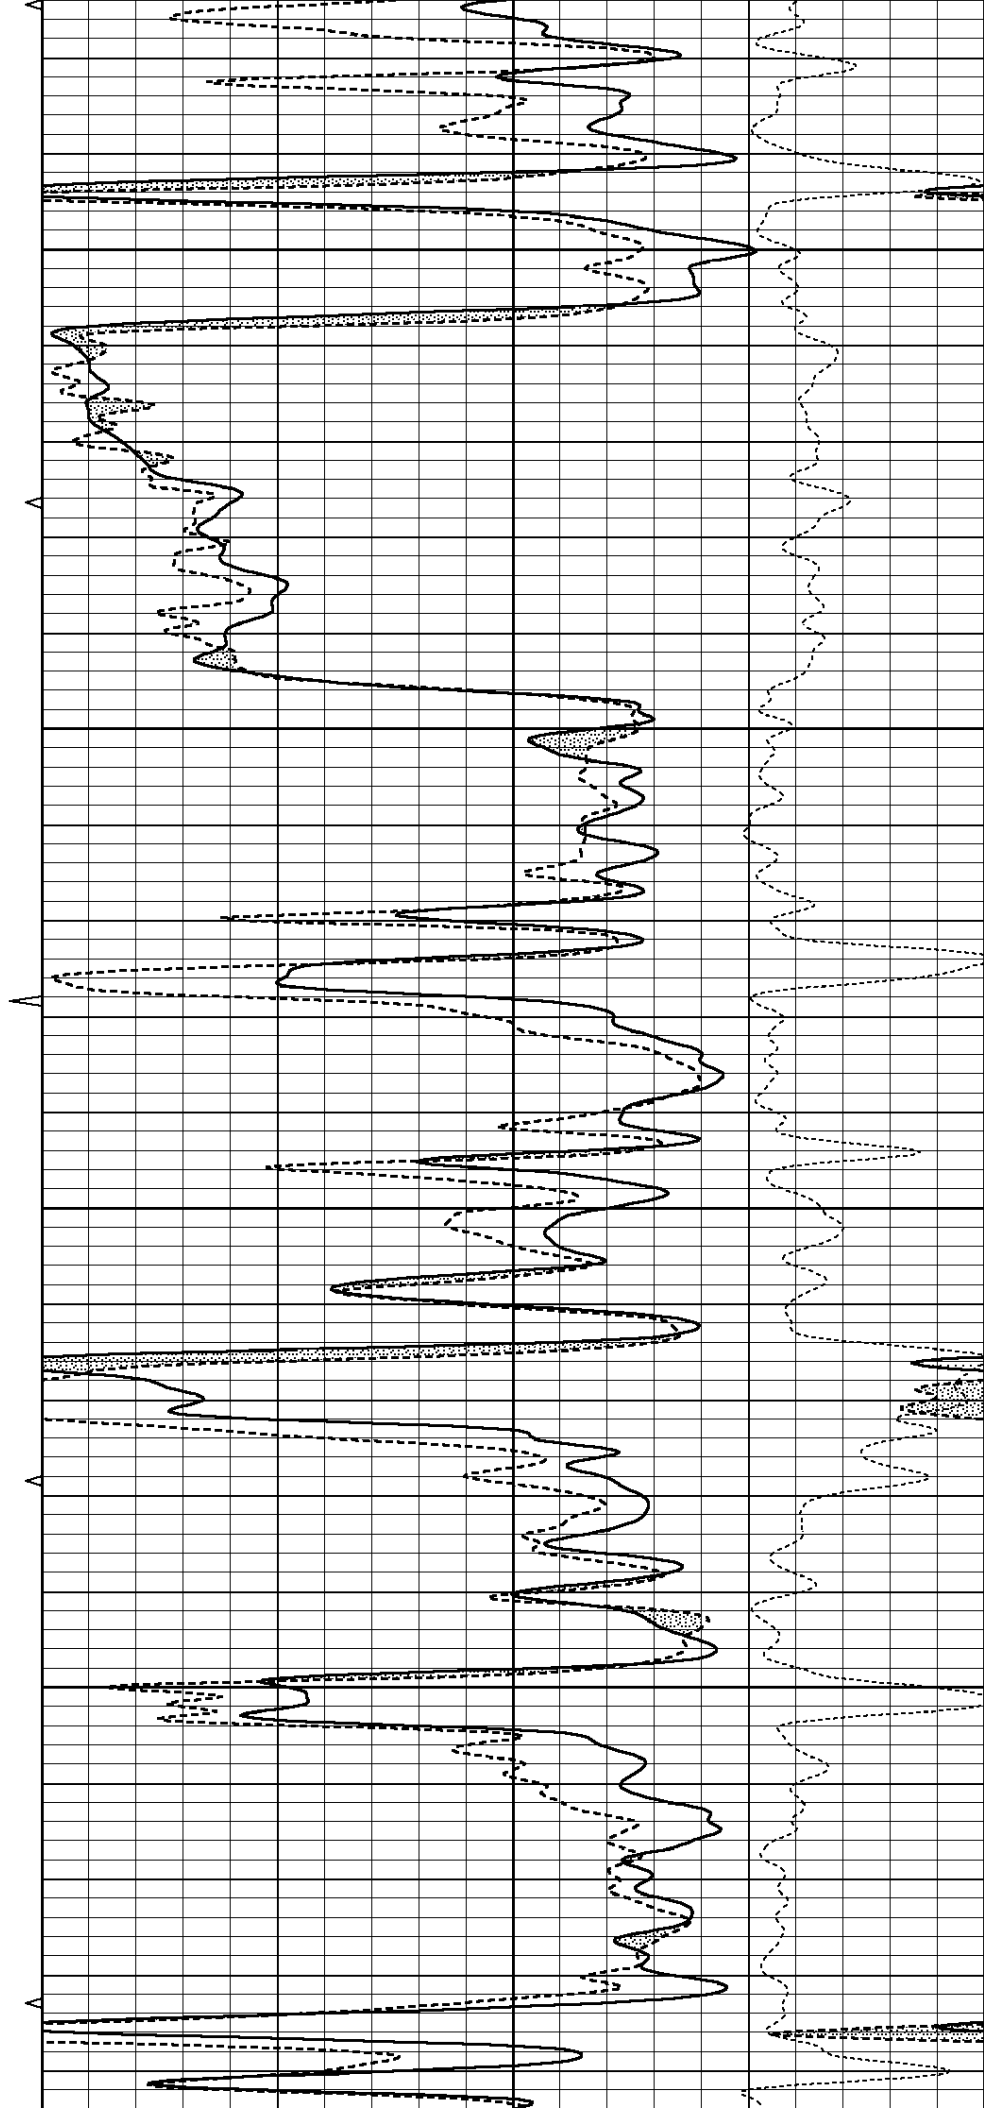

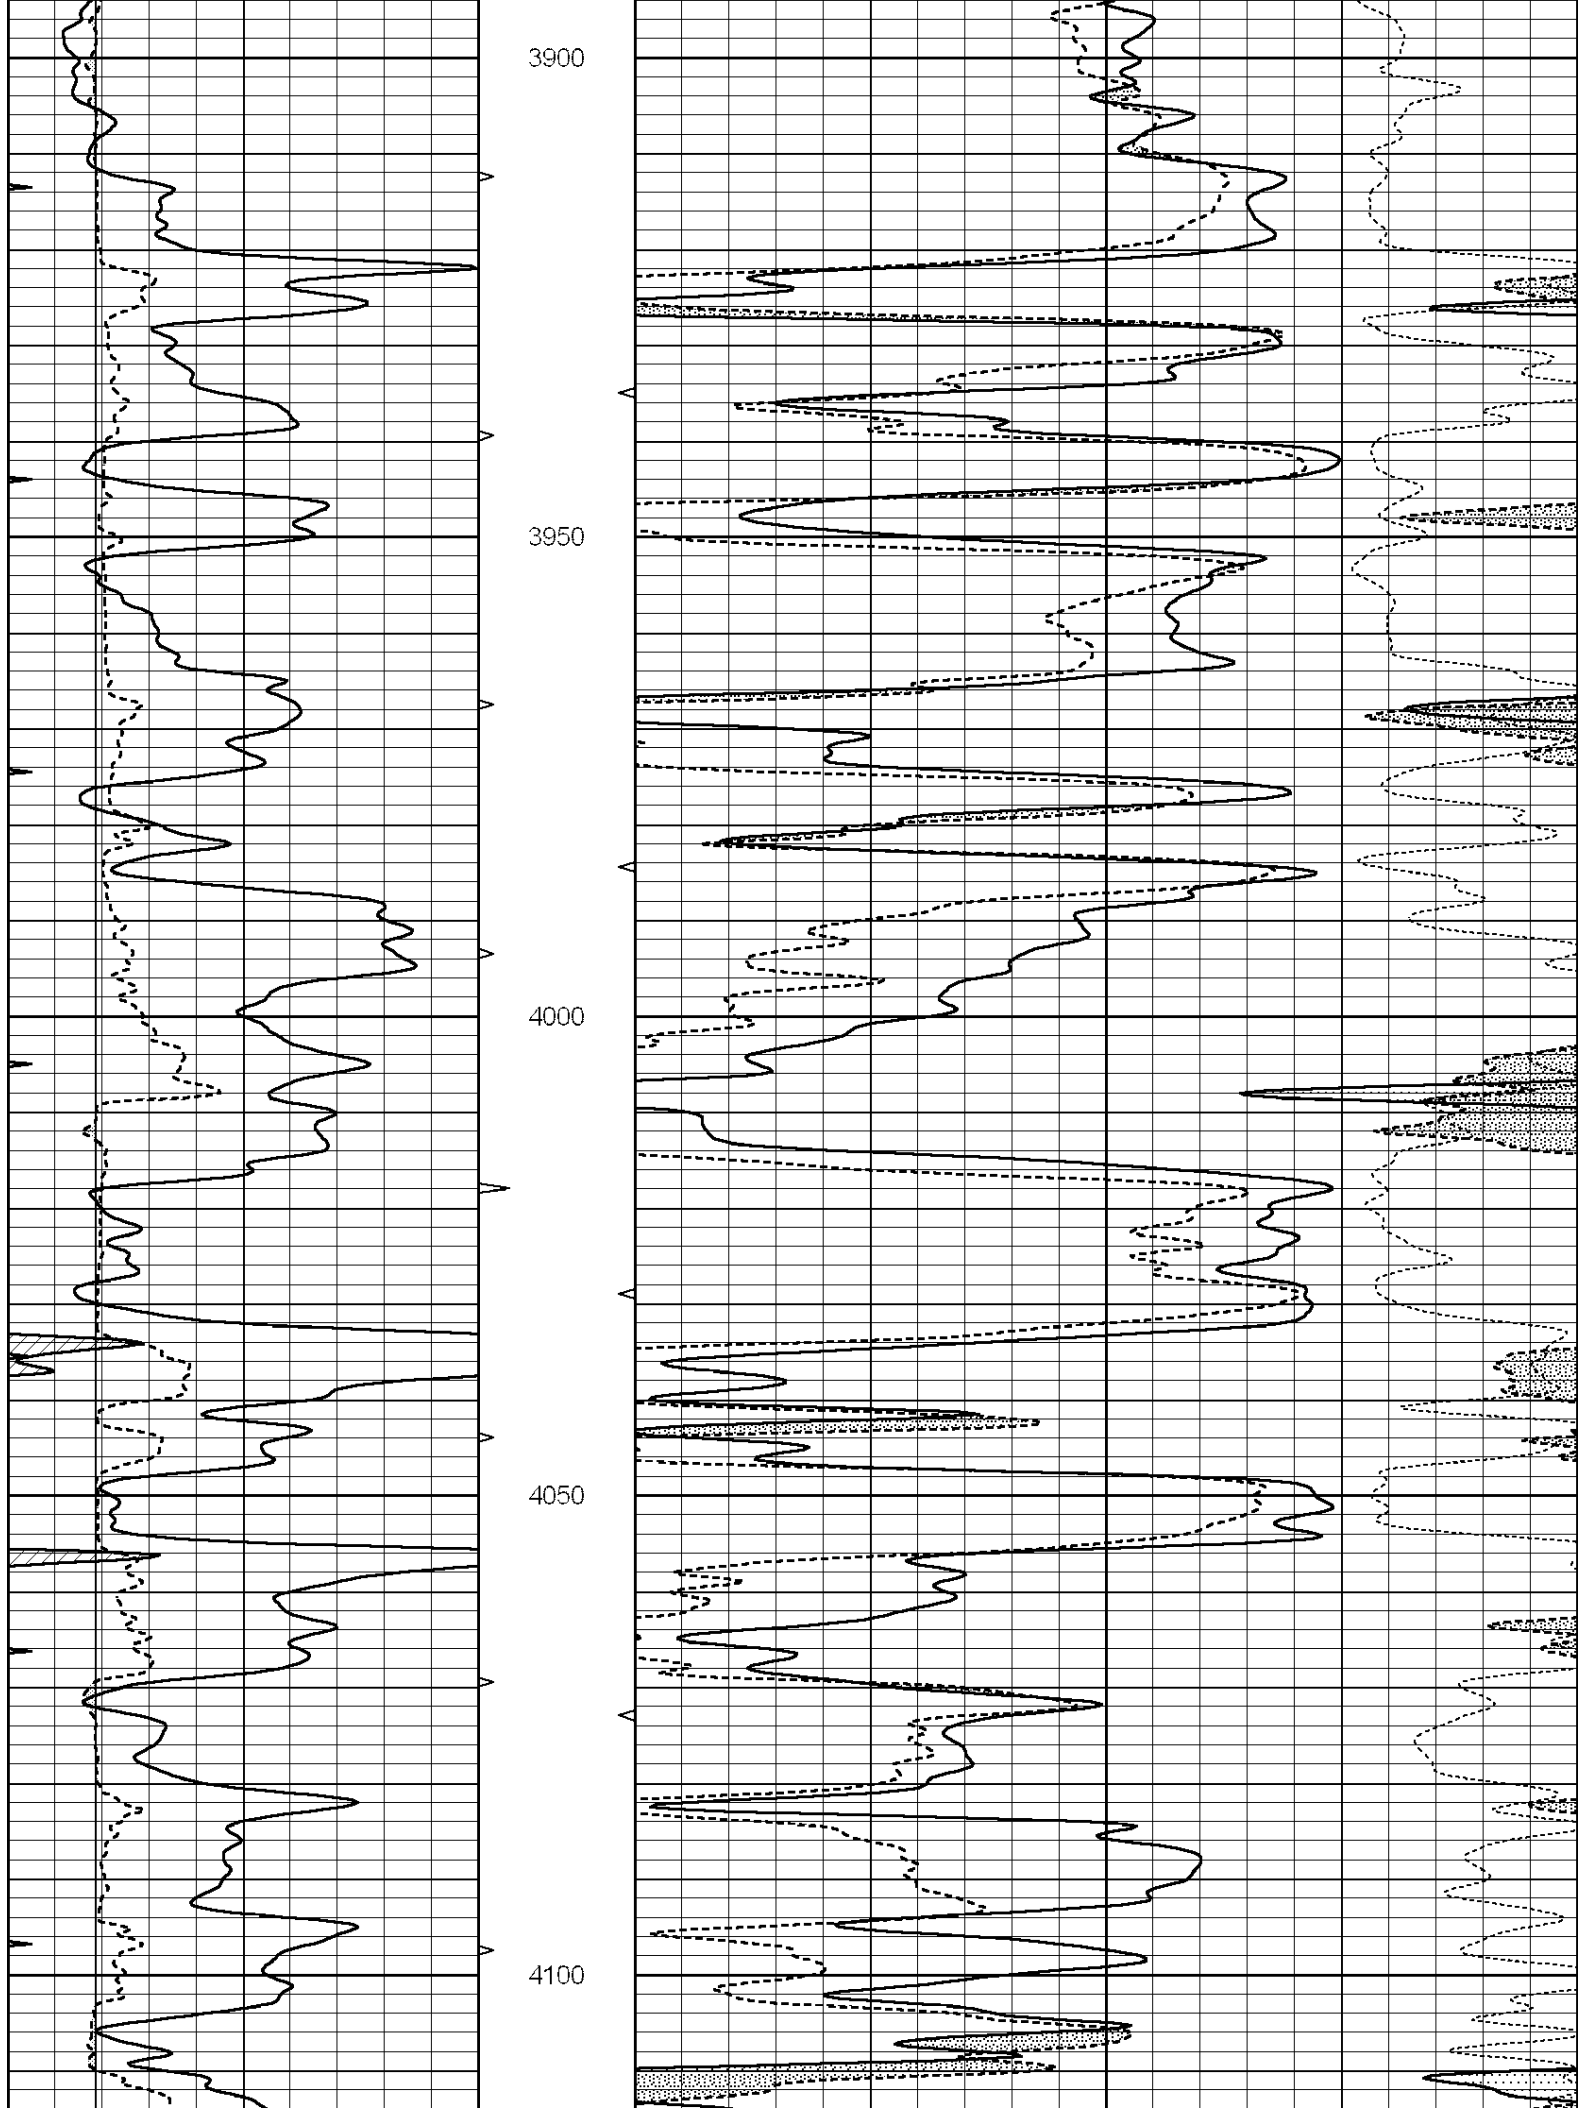

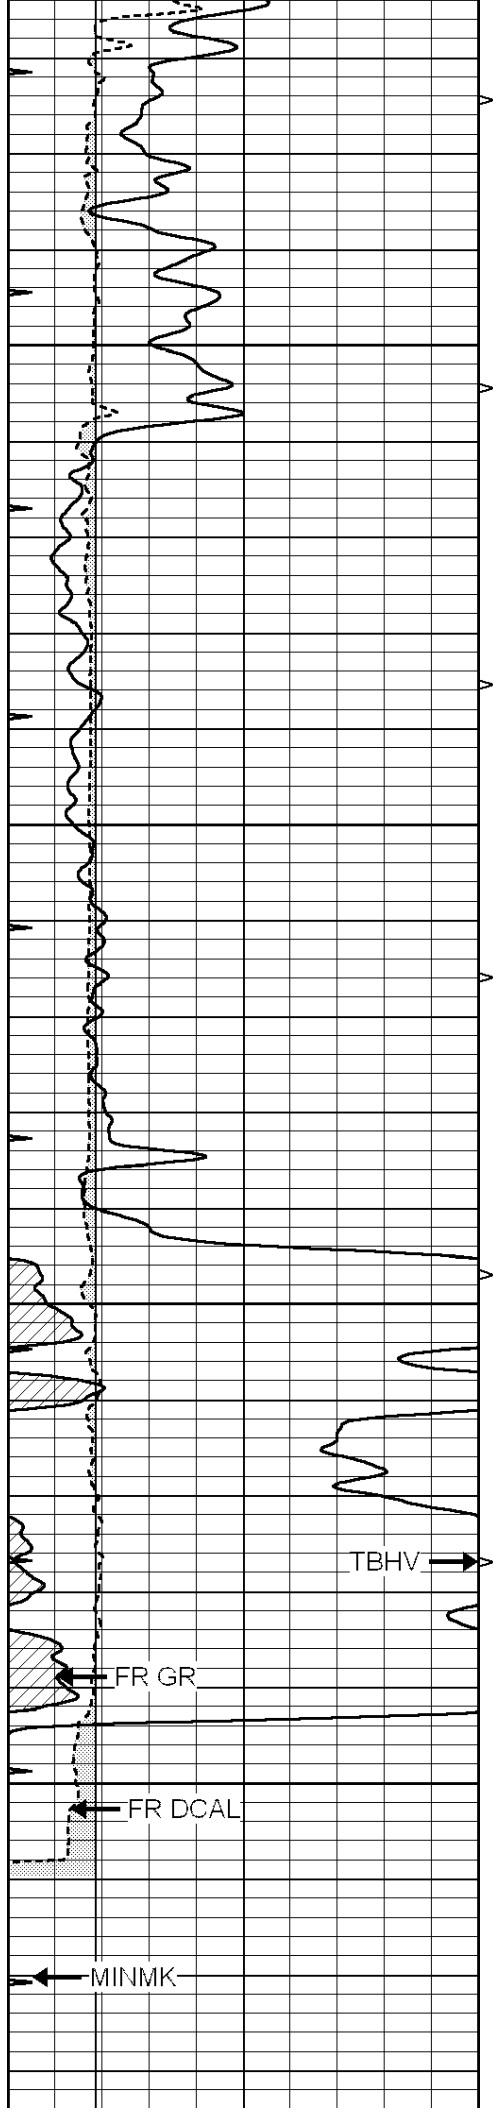


4150

4200

4250

4300

LTD 4327

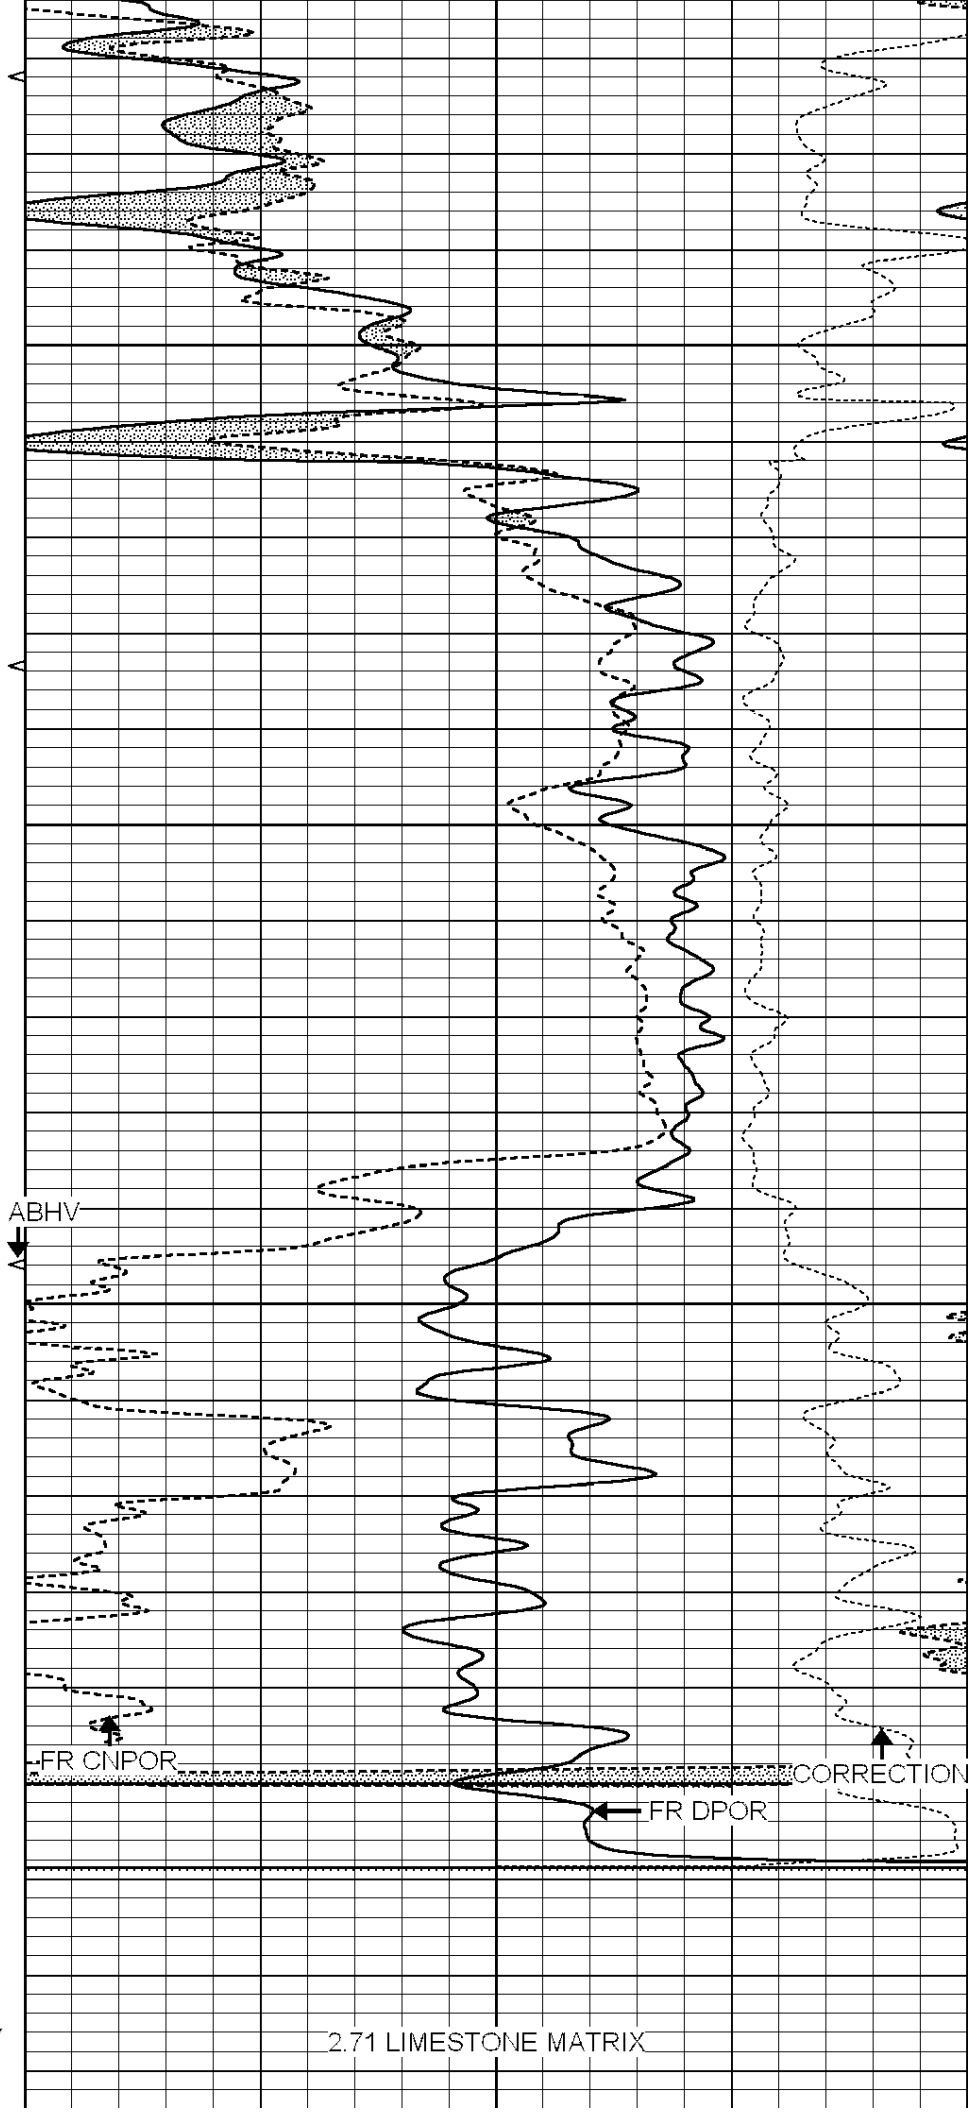

2.71 LIMESTONE MATRIX

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		





**COMPLETION
& PRODUCTION
SERVICES CO.**

REPEAT SECTION

Database File: 25889ddn.db
Dataset Pathname: pass2.4
Presentation Format: den_neu
Dataset Creation: Fri Oct 03 09:25:10 2014
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

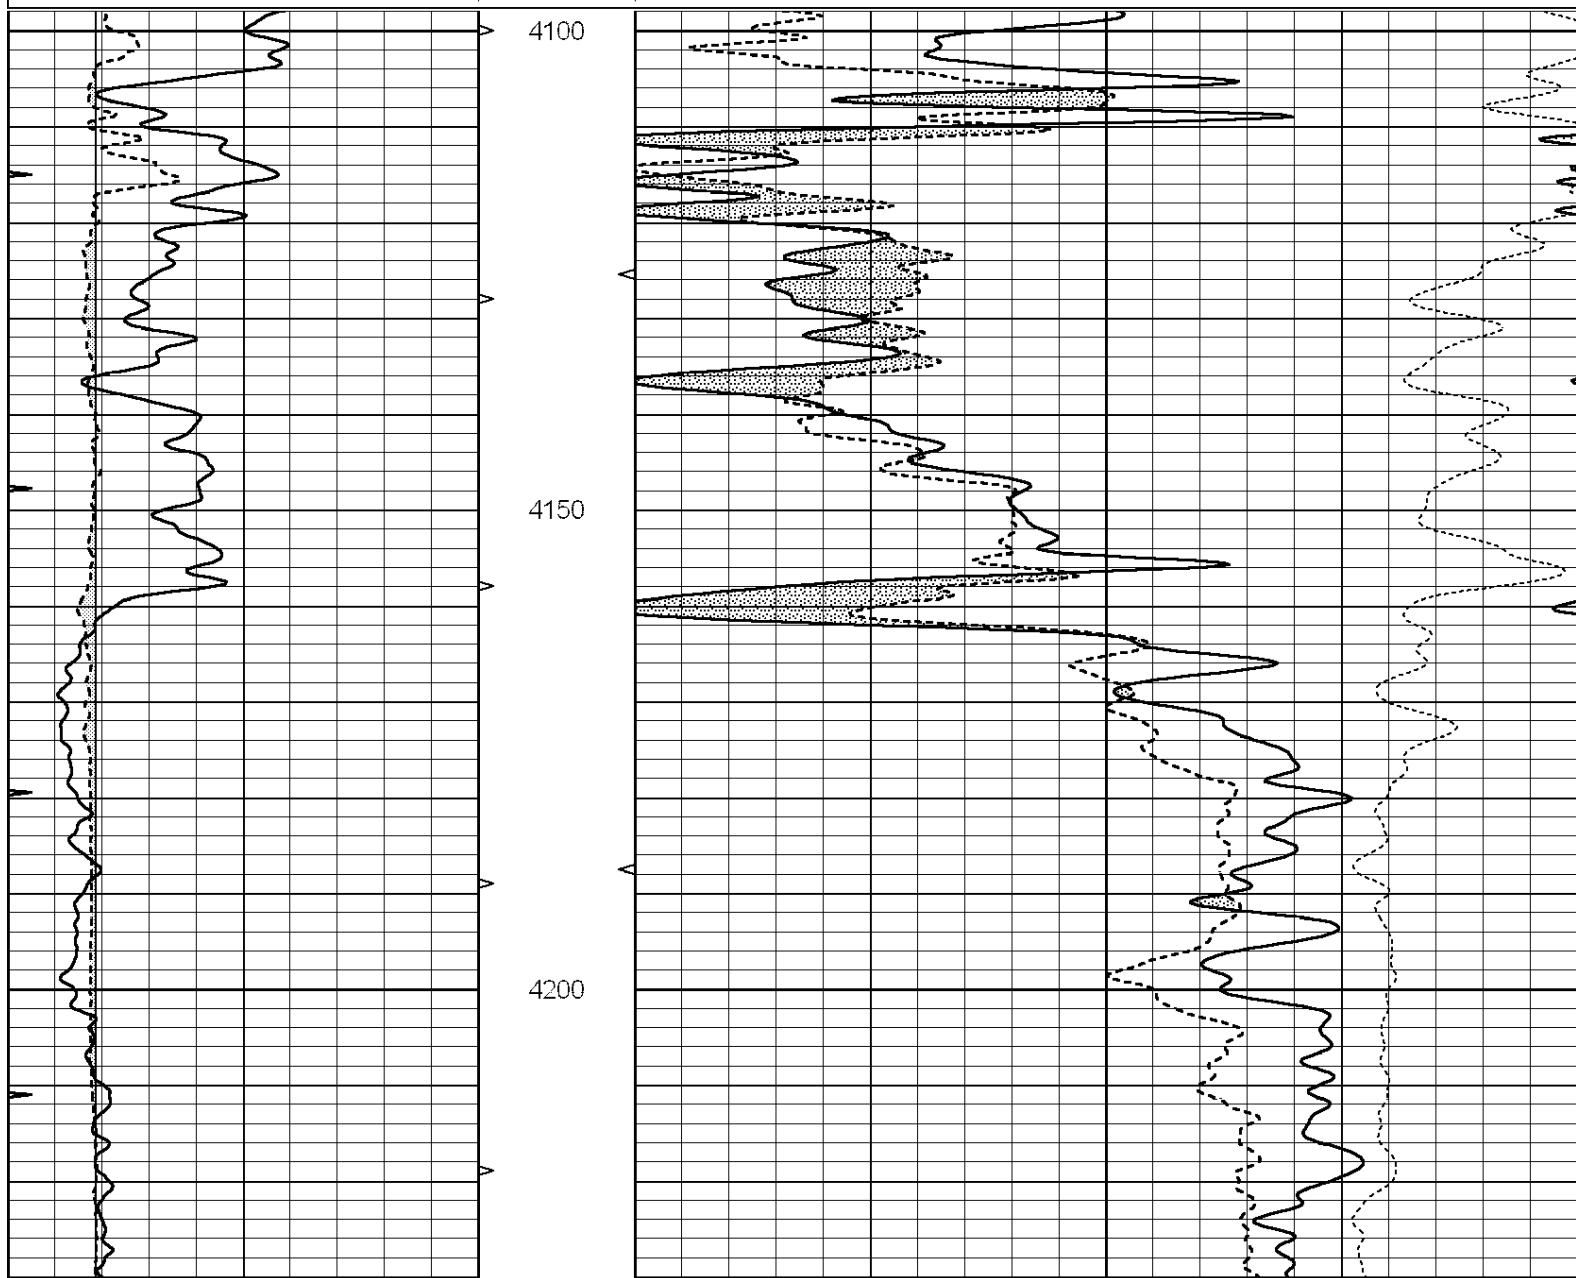

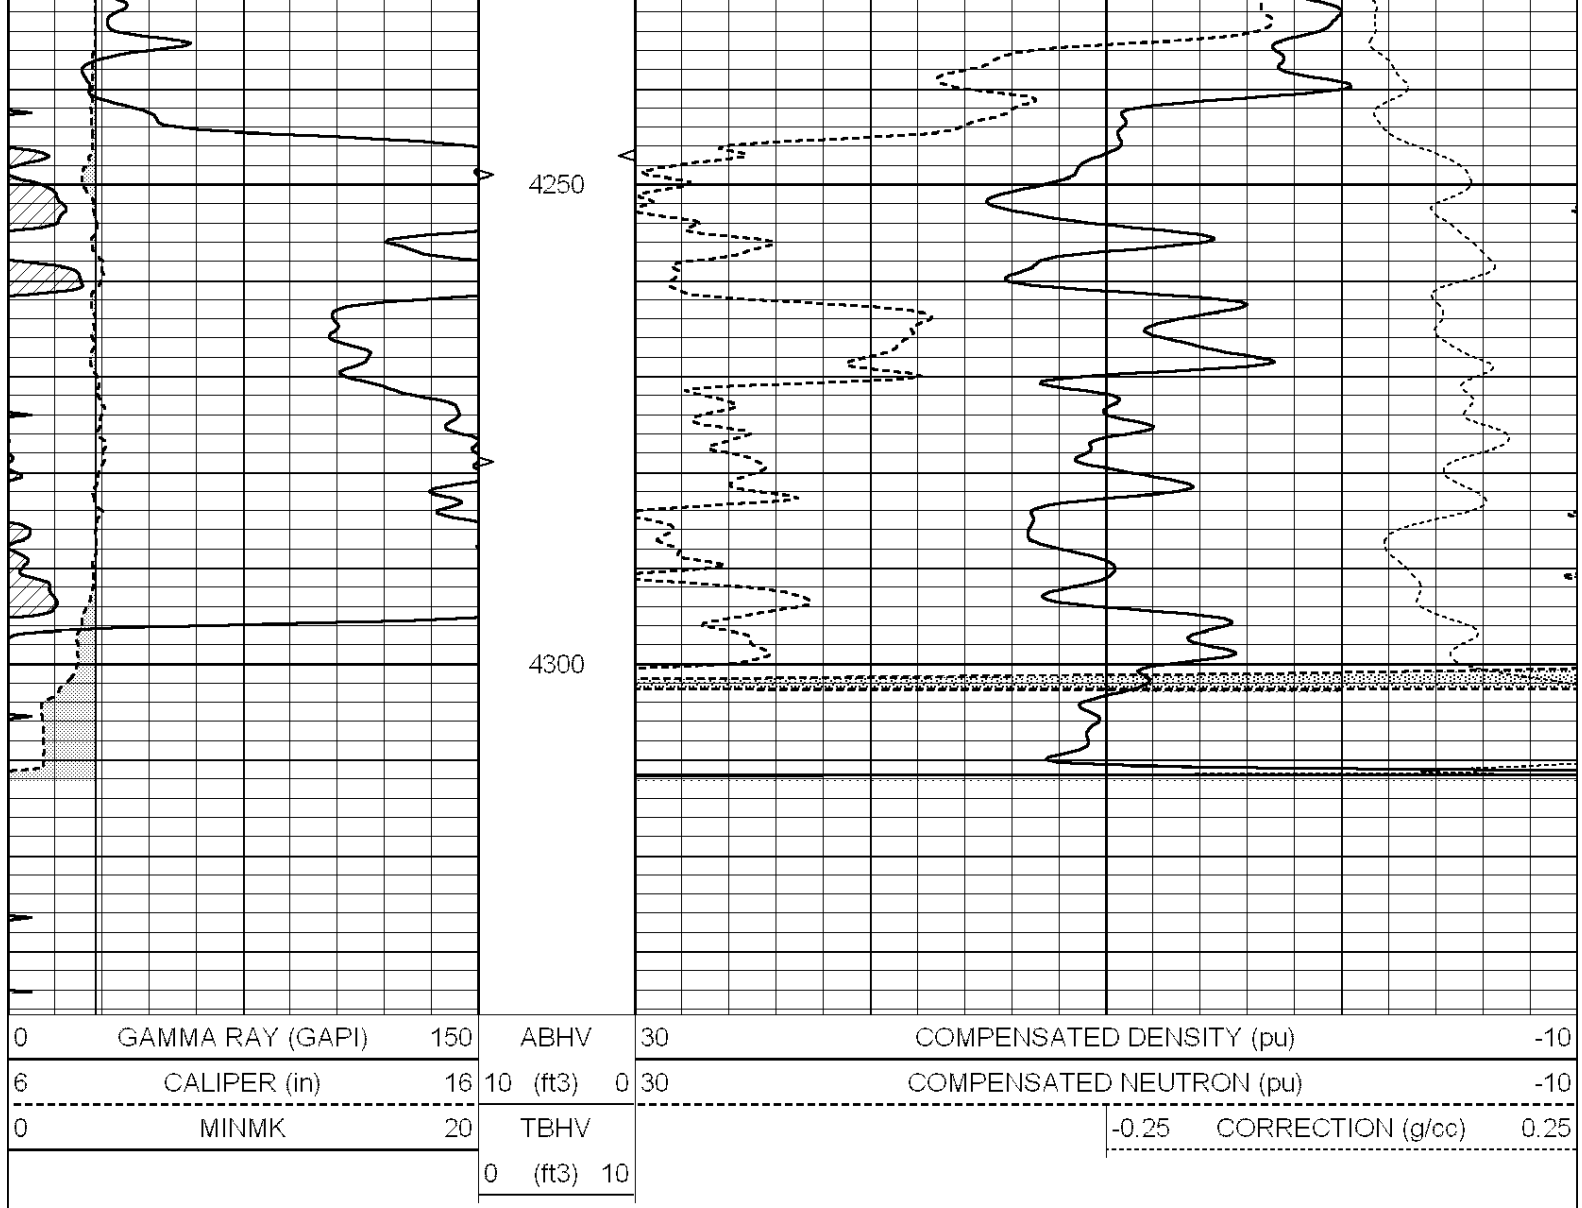

Calibration Report

Database File: 25889ddn.db
Dataset Pathname: pass3.5
Dataset Creation: Fri Oct 03 10:04:11 2014

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG
Surface Cal Performed: Fri Sep 26 22:43:29 2014
Downhole Cal Performed: Mon Jul 28 12:02:56 2008
After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	670.000	-14.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	670.000	-26.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

Readings References Results

	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 004N Model: PRB								

Master Calibration					Performed Fri May 30 11:01:00 2014			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	1378.8	10804.6	3492.0	12453.4				cps
Window 2	1262.4	9313.5	3076.7	10594.7				cps
Window 3	1077.6	5668.7	2076.0	6314.8				cps
Window 4	306.4	313.0	306.4	315.6				cps
Long Space	0.0	8051.0	1814.3	9332.3				cps
Short Space	1.9	1706.1	1146.0	1707.6				cps
Rho		1.7100	2.5900	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.0	Rib Slope	: 1.002	Density/Spine Ratio				: 0.571
Spine Angle	: 75.0	Spine Slope	: 3.745	Spine Intercept				: -18.9

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

After Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

Compensated Neutron Calibration Report			
Serial Number:		070808	
Tool Model:		Probe	
PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
Gamma Ray Calibration Report			
Serial Number:		070558	
Tool Model:		OPEN_GR	
Performed:		Mon Jun 30 21:53:39 2014	
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2800	GAPI/cps	