



**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	SANDLIN OIL CORPORATION	Company	SANDLIN OIL CORPORATION
Well	CHESNEY #1	Well	CHESNEY #1
Field	WILDCAT	Field	WILDCAT
County	ROOKS	County	ROOKS
State	KANSAS	State	KANSAS
Location:	API # : 15-163-24290-0000	Other Services CDL/CNL DIL	
Permanent Datum	GROUND LEVEL	Elevation	1942
Log Measured From	1860' FNL & 1025' FWL SE - NE - SW - NW KELLY BUSHING 6' A.G.L.	K.B. 1948 D.F. 1946 G.L. 1942	
Drilling Measured From	SEC 24 TWP 8S RGE 17W KELLY BUSHING		
Date	4/26/15		
Run Number	TWO		
Depth Driller	3500		
Depth Logger	3496		
Bottom Logged Interval	3494		
Top Log Interval	2700		
Casing Driller	8 5/8"@215'		
Casing Logger	215		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,000 PPM	
Density / Viscosity	9.2/54		
pH / Fluid Loss	9.0/8.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.950@70F		
Rmf @ Meas. Temp	.713@70F		
Rmc @ Meas. Temp	1.14@70F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.594@112F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	9:00 P.M.		
Maximum Recorded Temperature	112F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	STEVE REED		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS

PLAINVILLE, KS., 6N. ON HWY 183 TO "RD. R", 6E. TO "RD. 23", 1 1/2N., 1E. ON TRAIL THEN BACK SOUTH

Database File: 26512ddn.db
Dataset Pathname: pass6.3
Presentation Format: micro
Dataset Creation: Mon Apr 27 00:01:58 2015 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

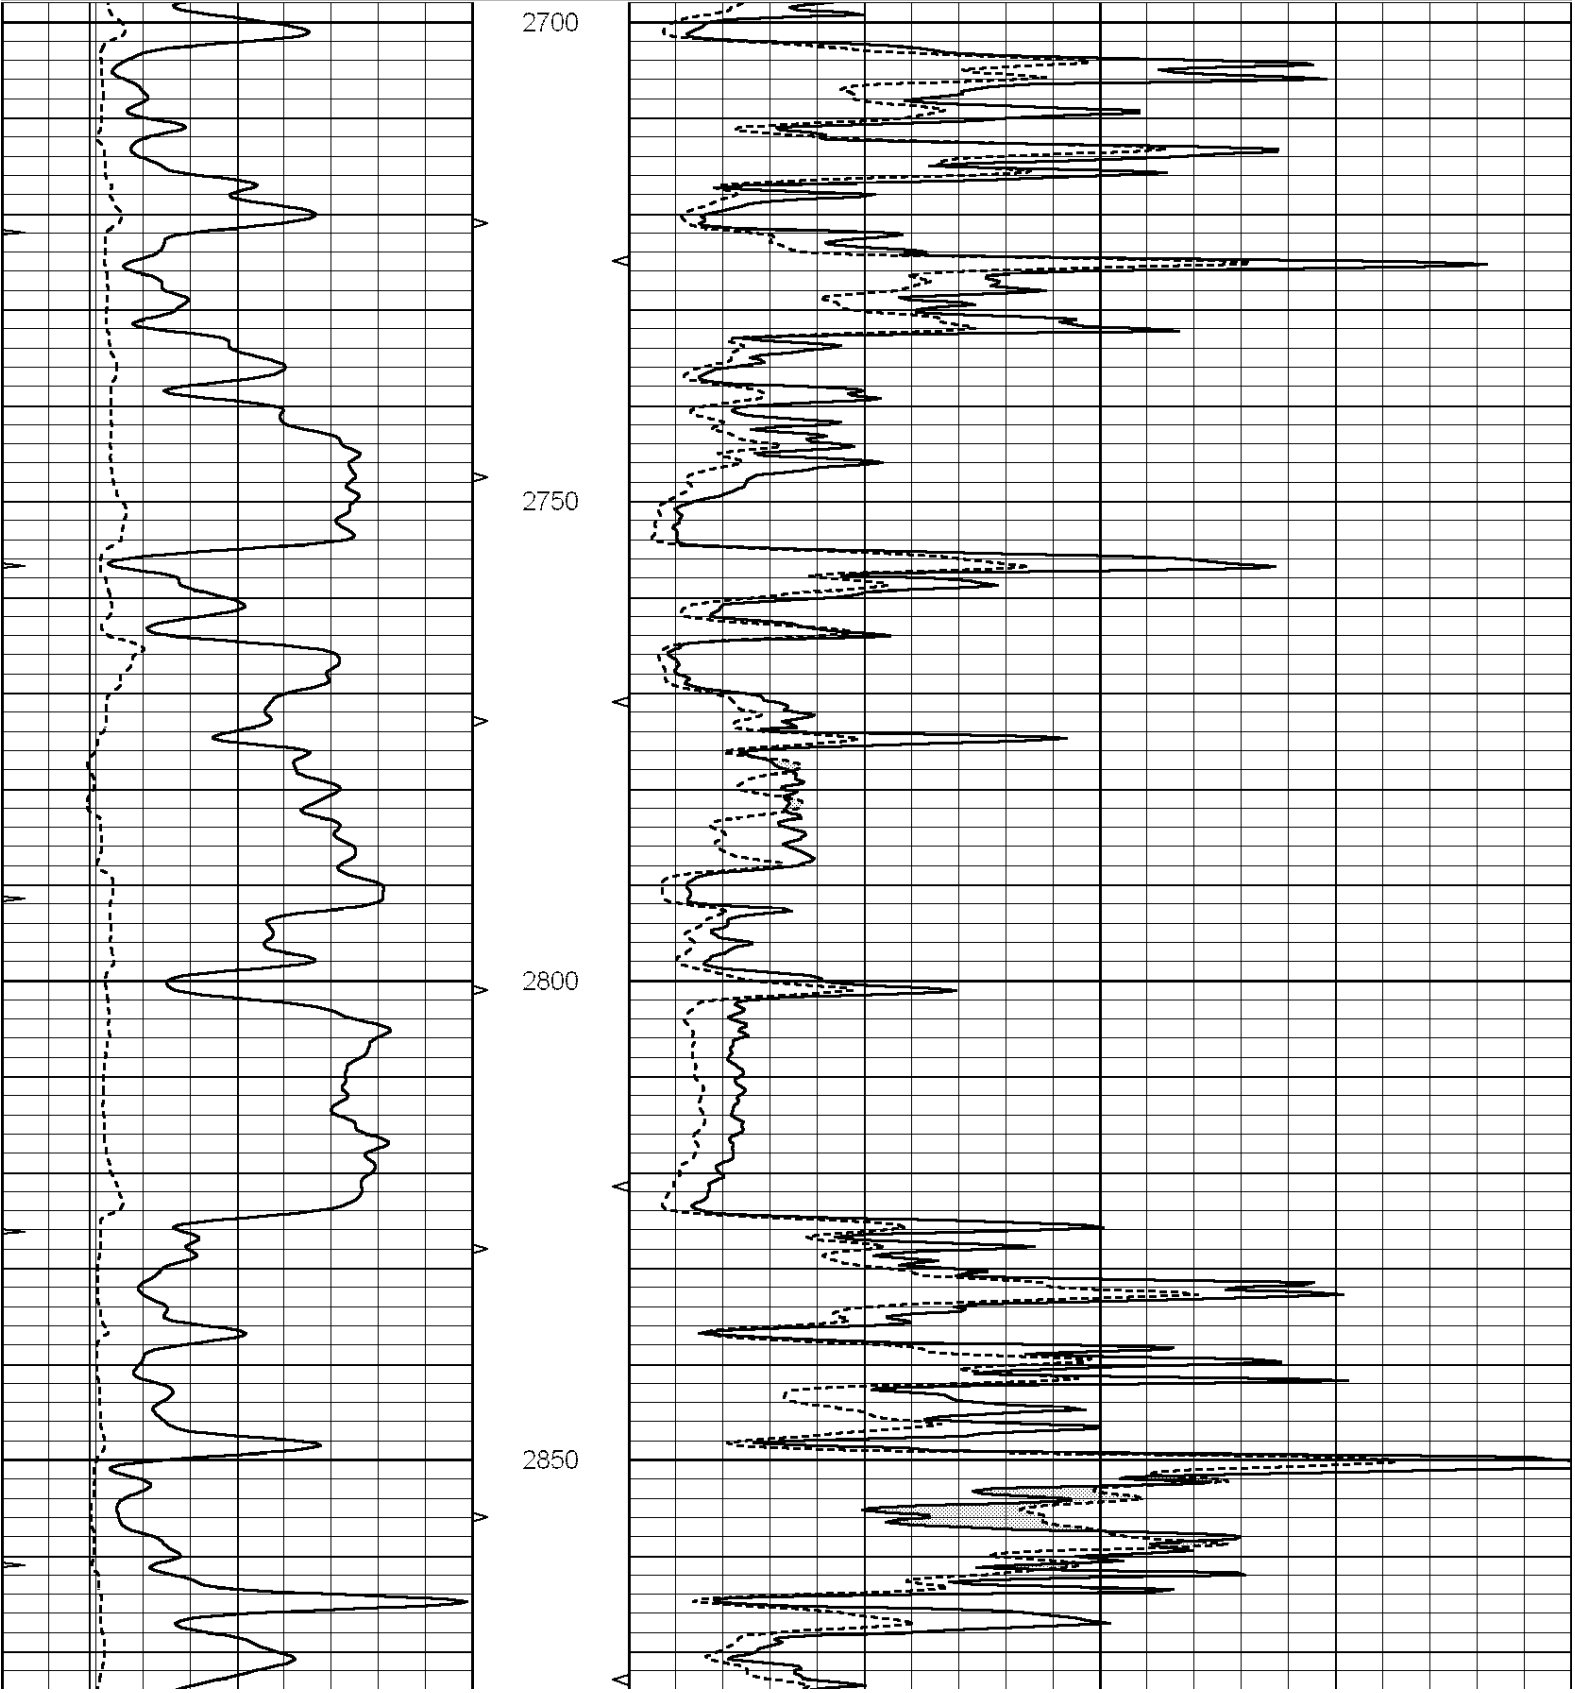

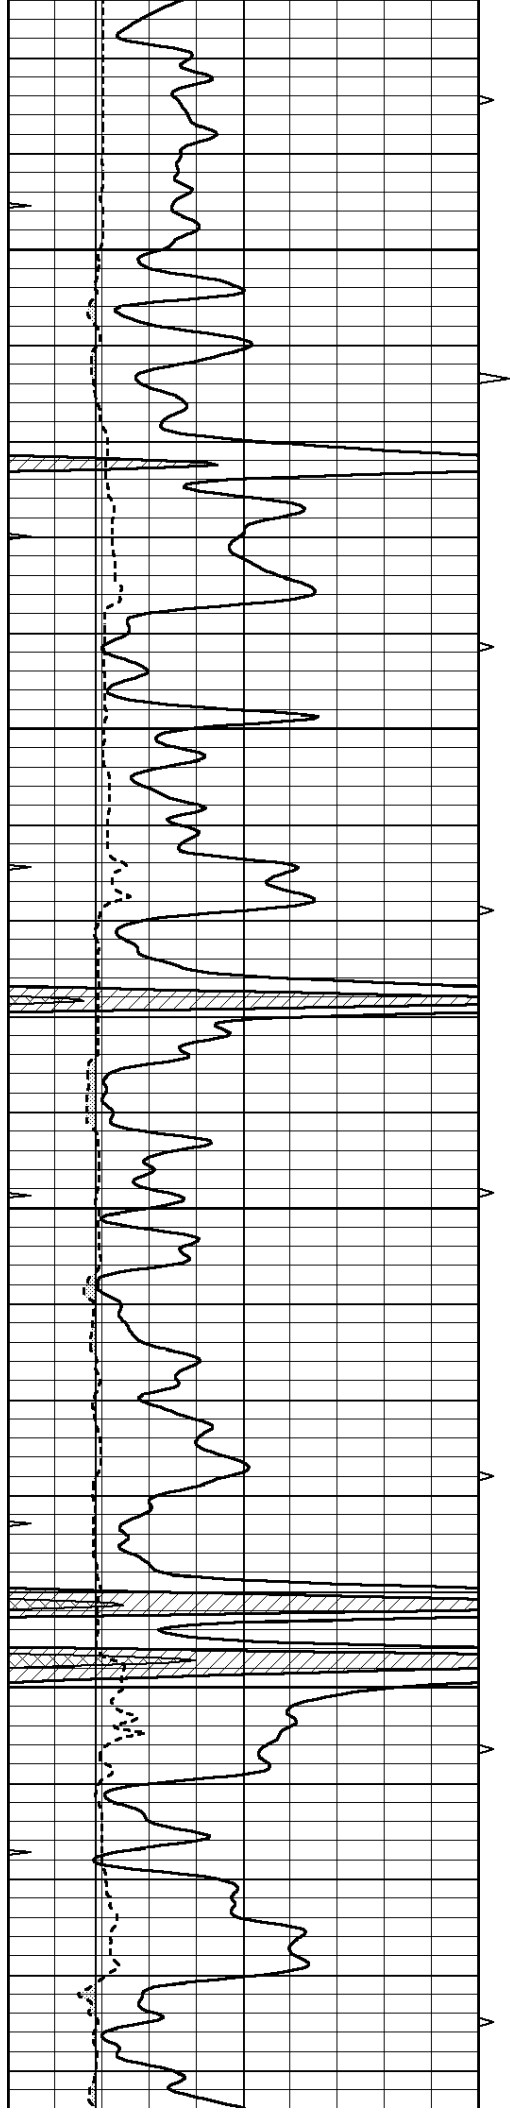



2900

2950

3000

3050

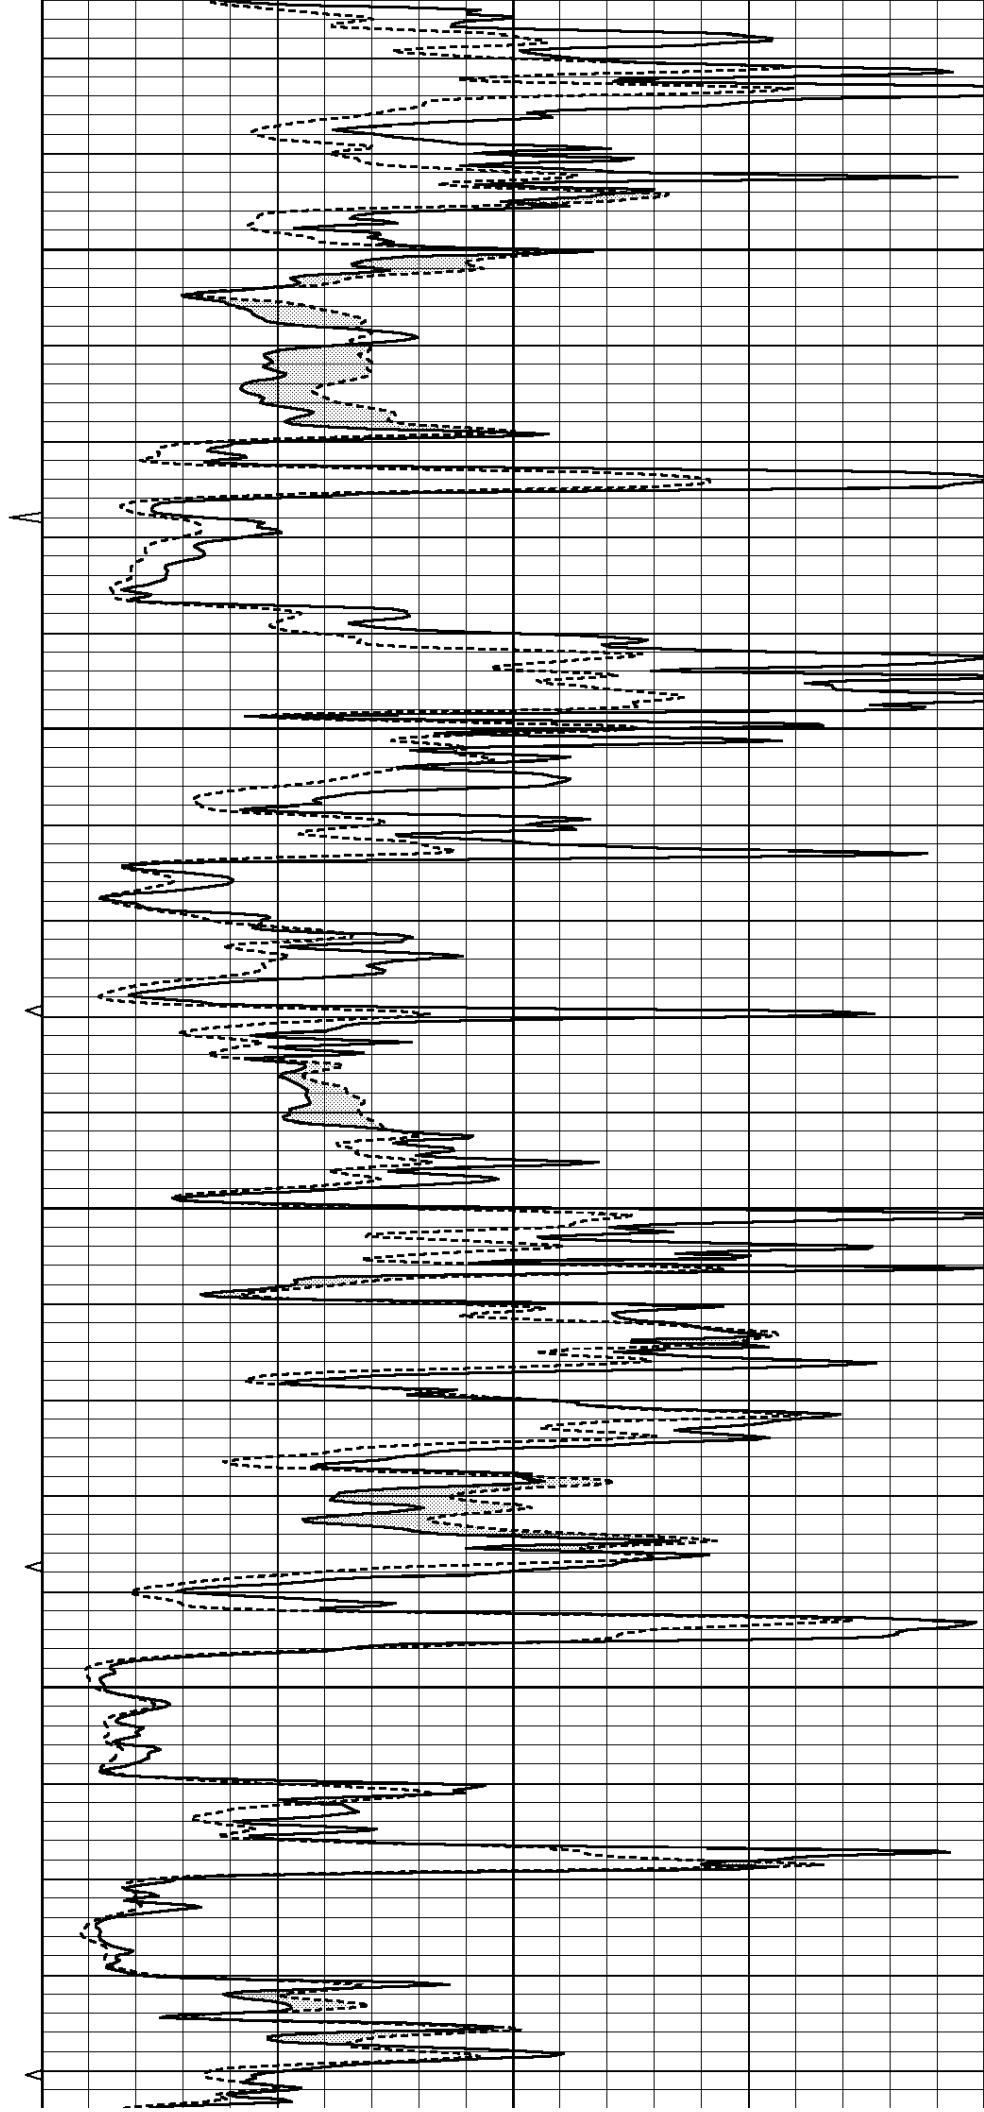

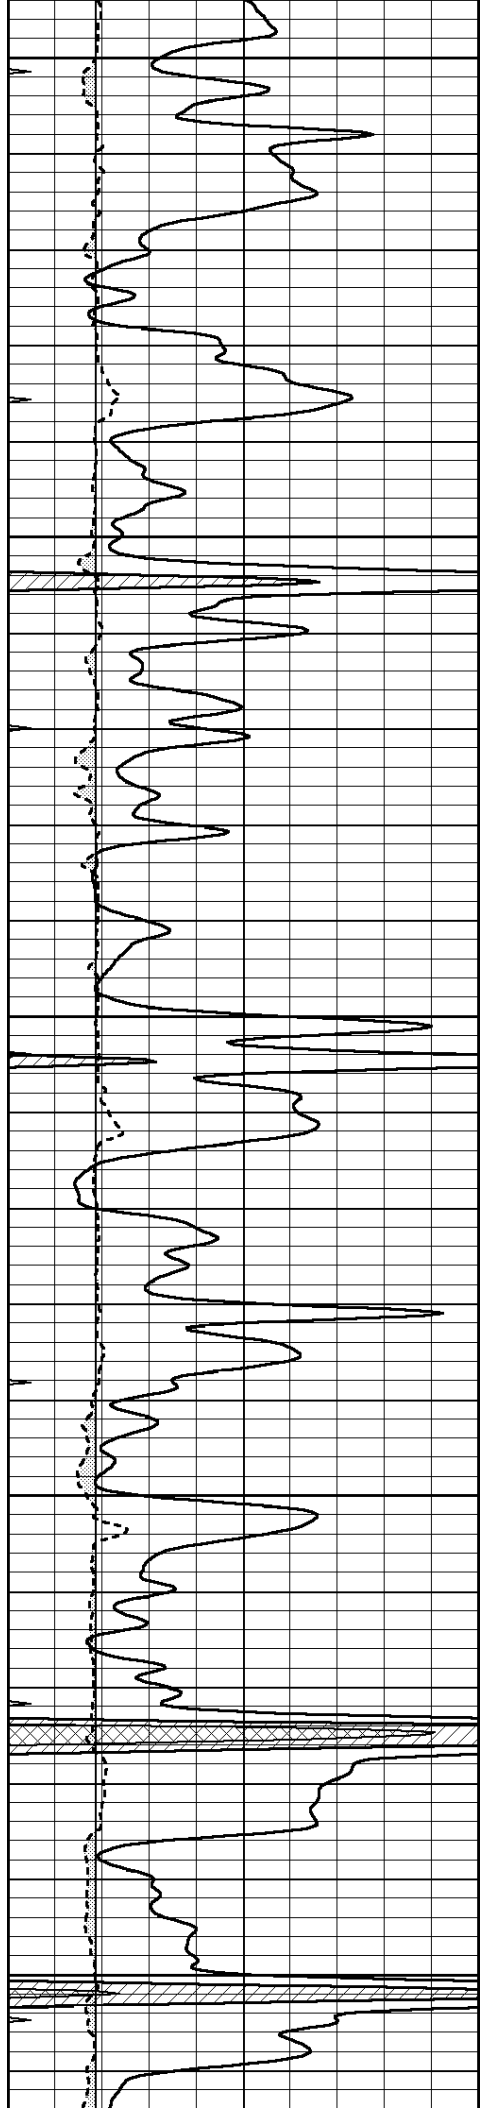


3100


3150

3200

3250

3300

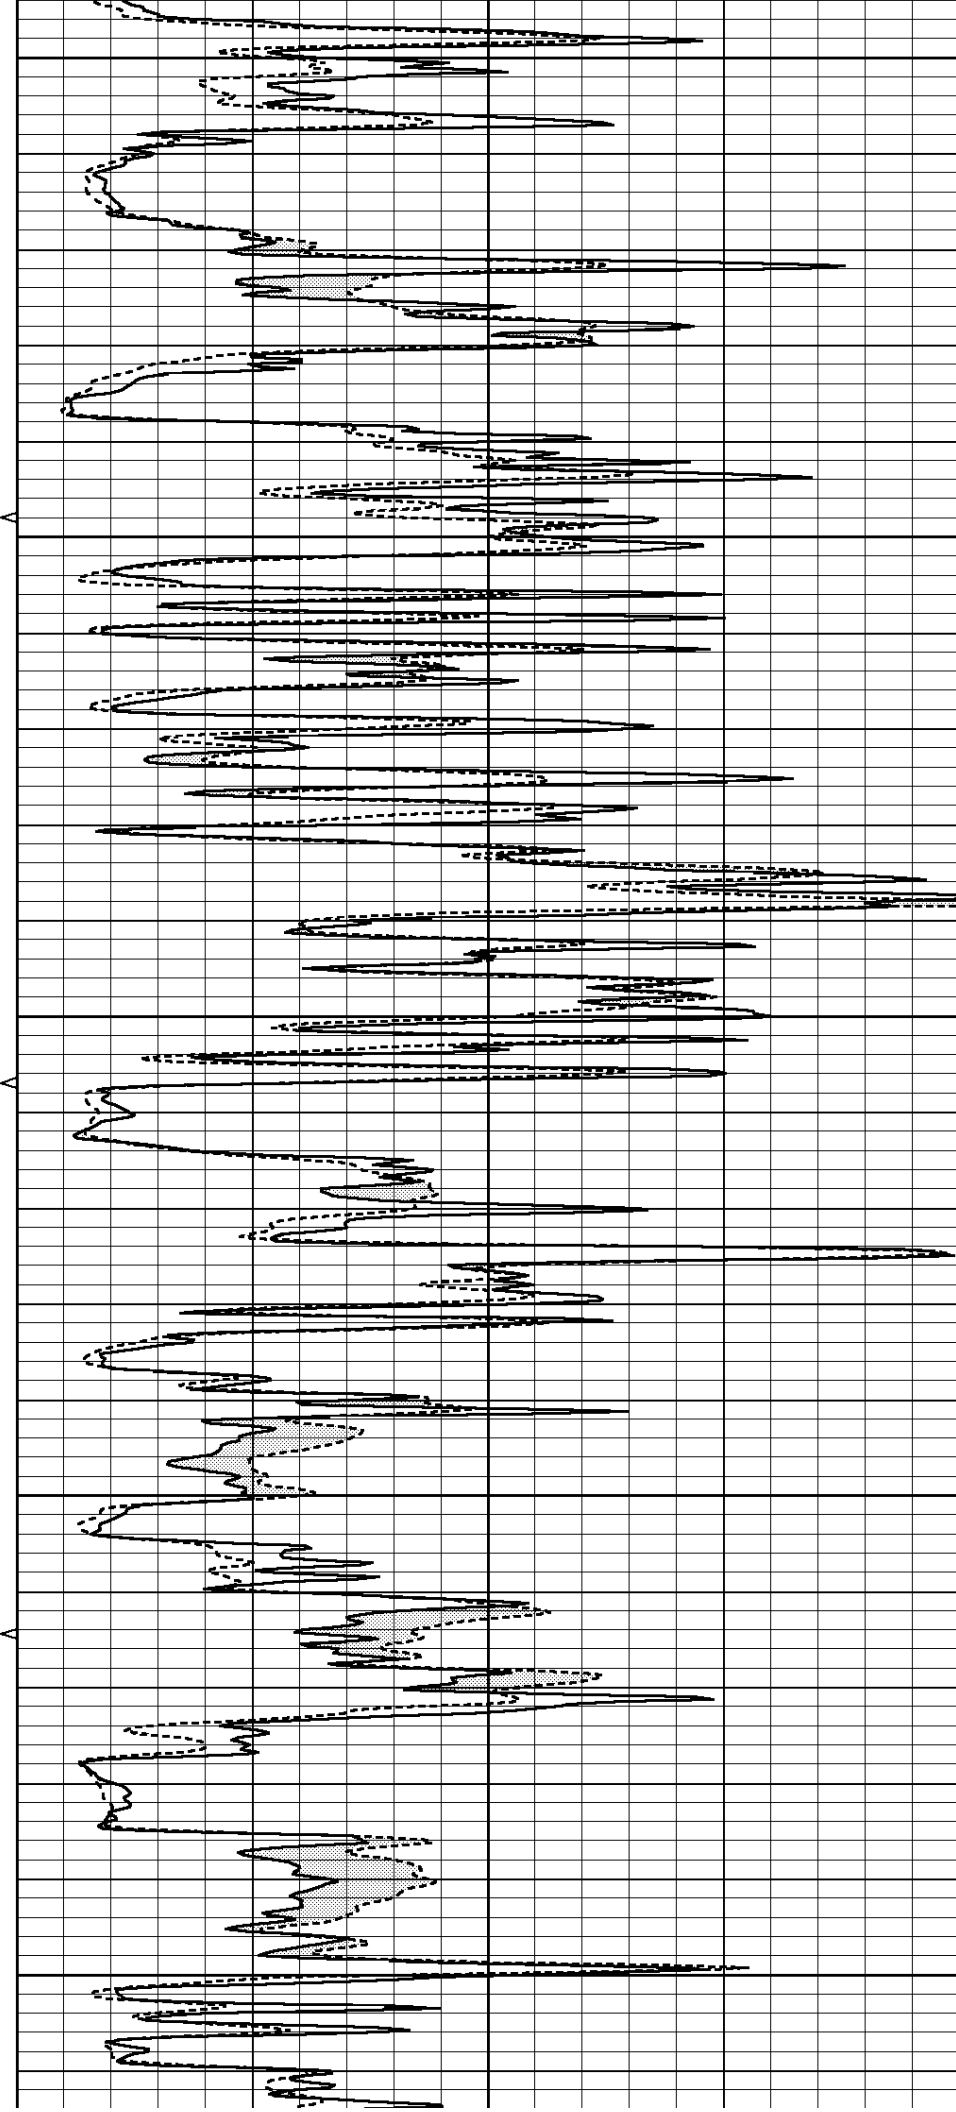


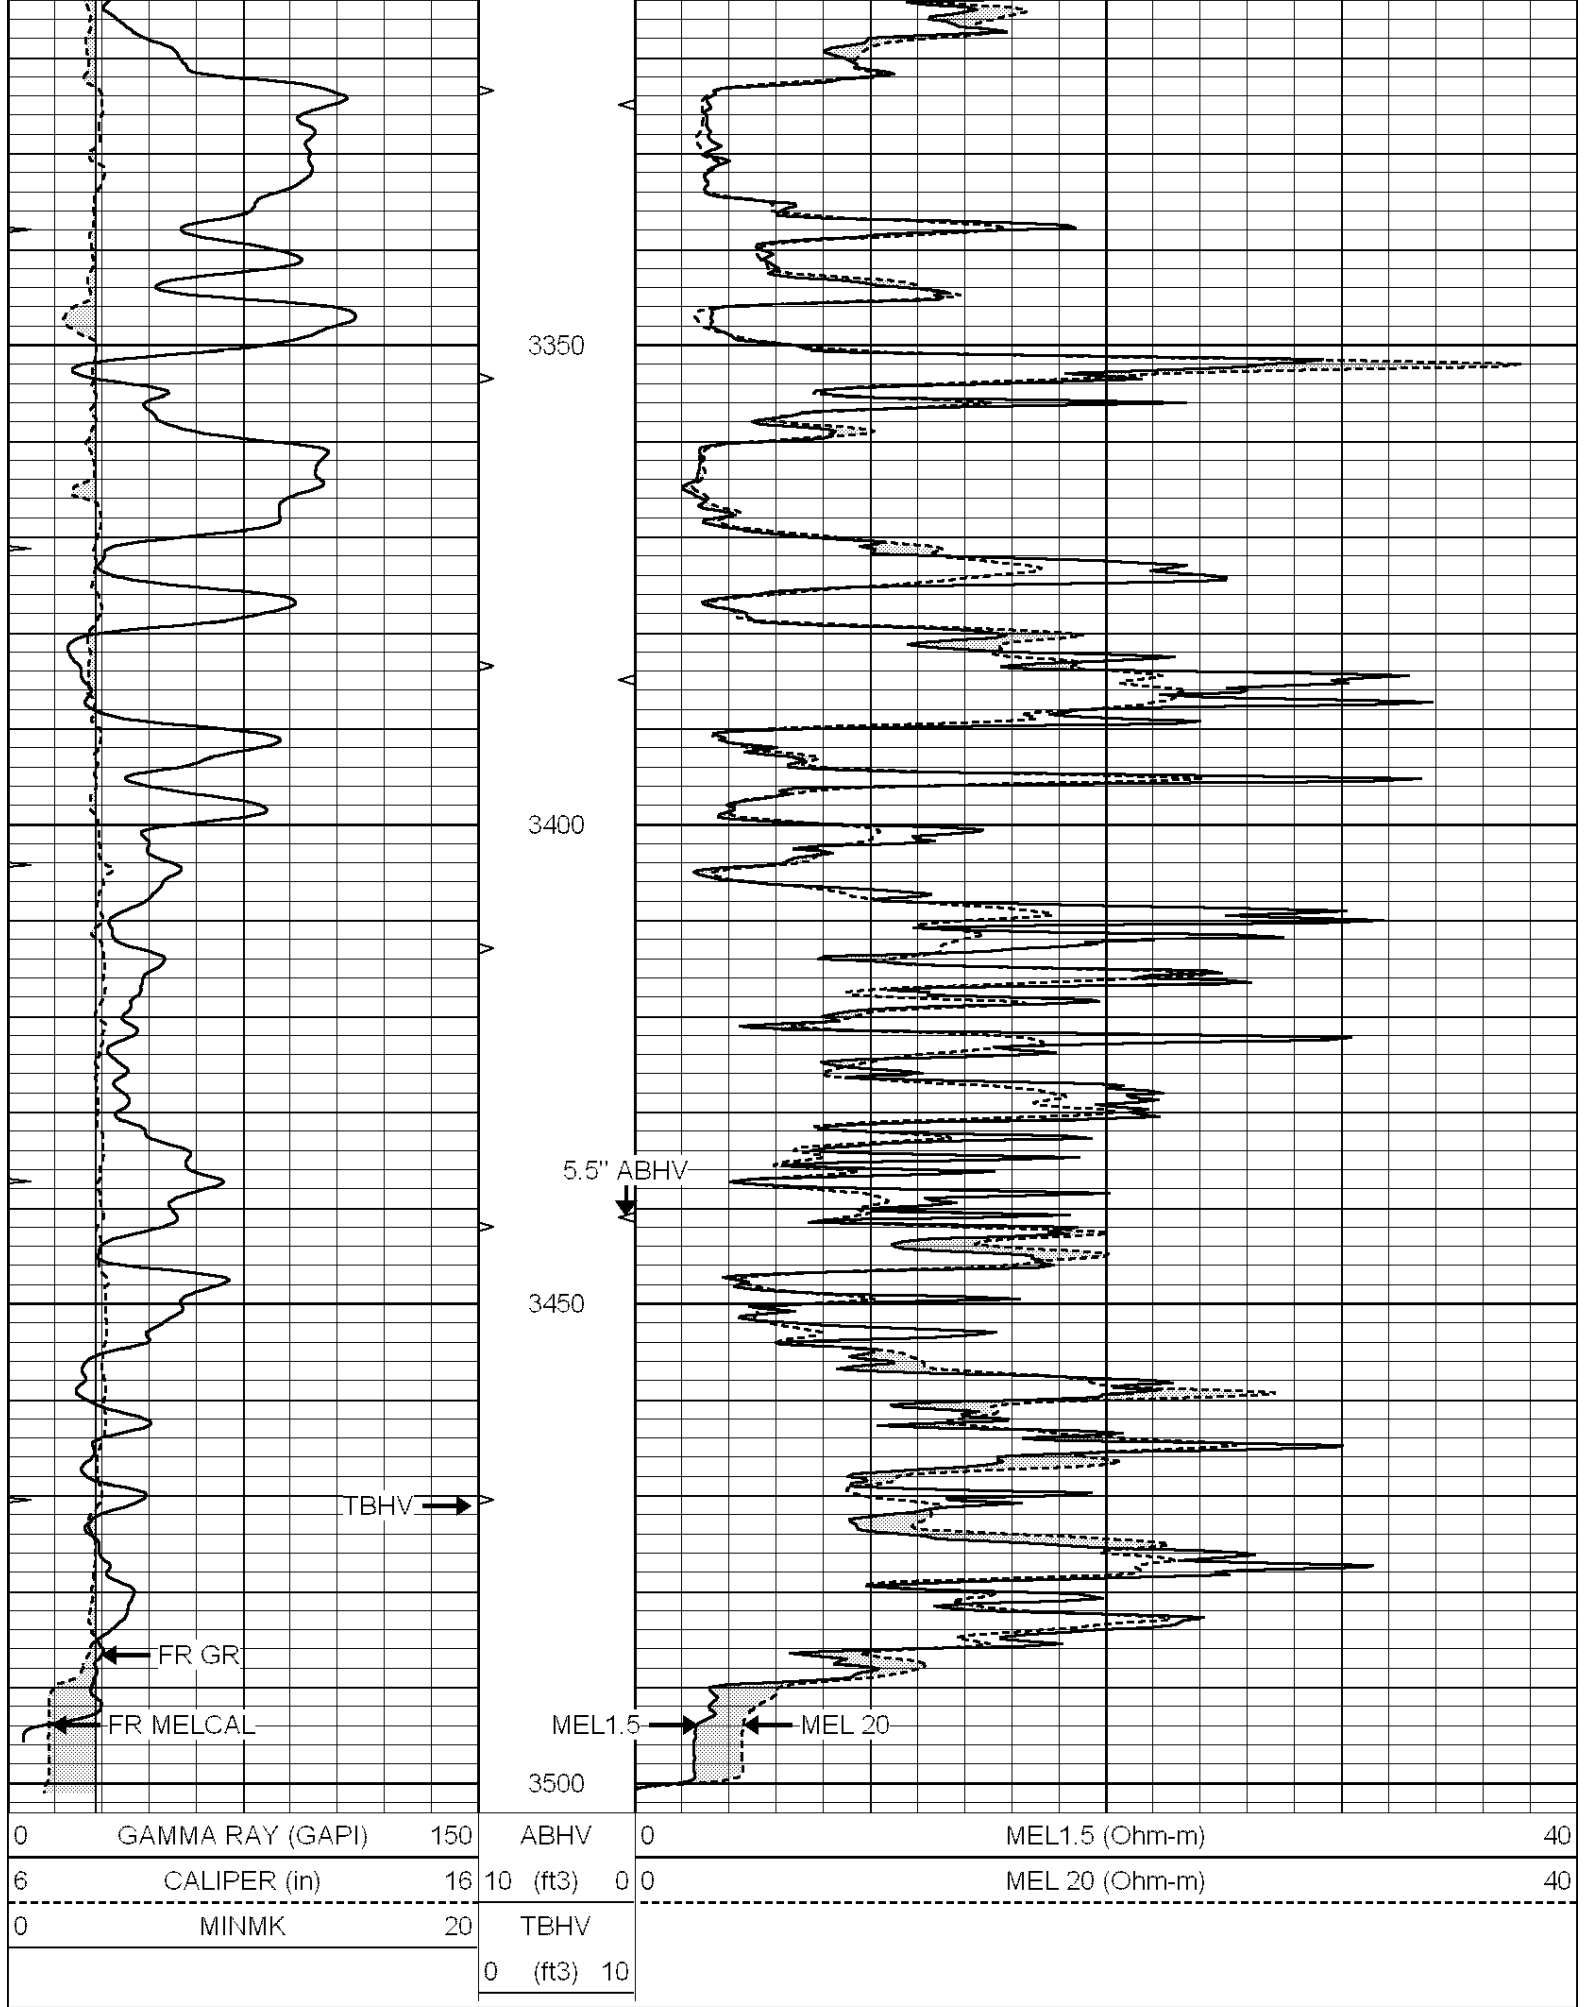


REPEAT SECTION

Database File: 26512ddn.db
 Dataset Pathname: pass5.5
 Presentation Format: micro
 Dataset Creation: Sun Apr 26 23:58:50 2015
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

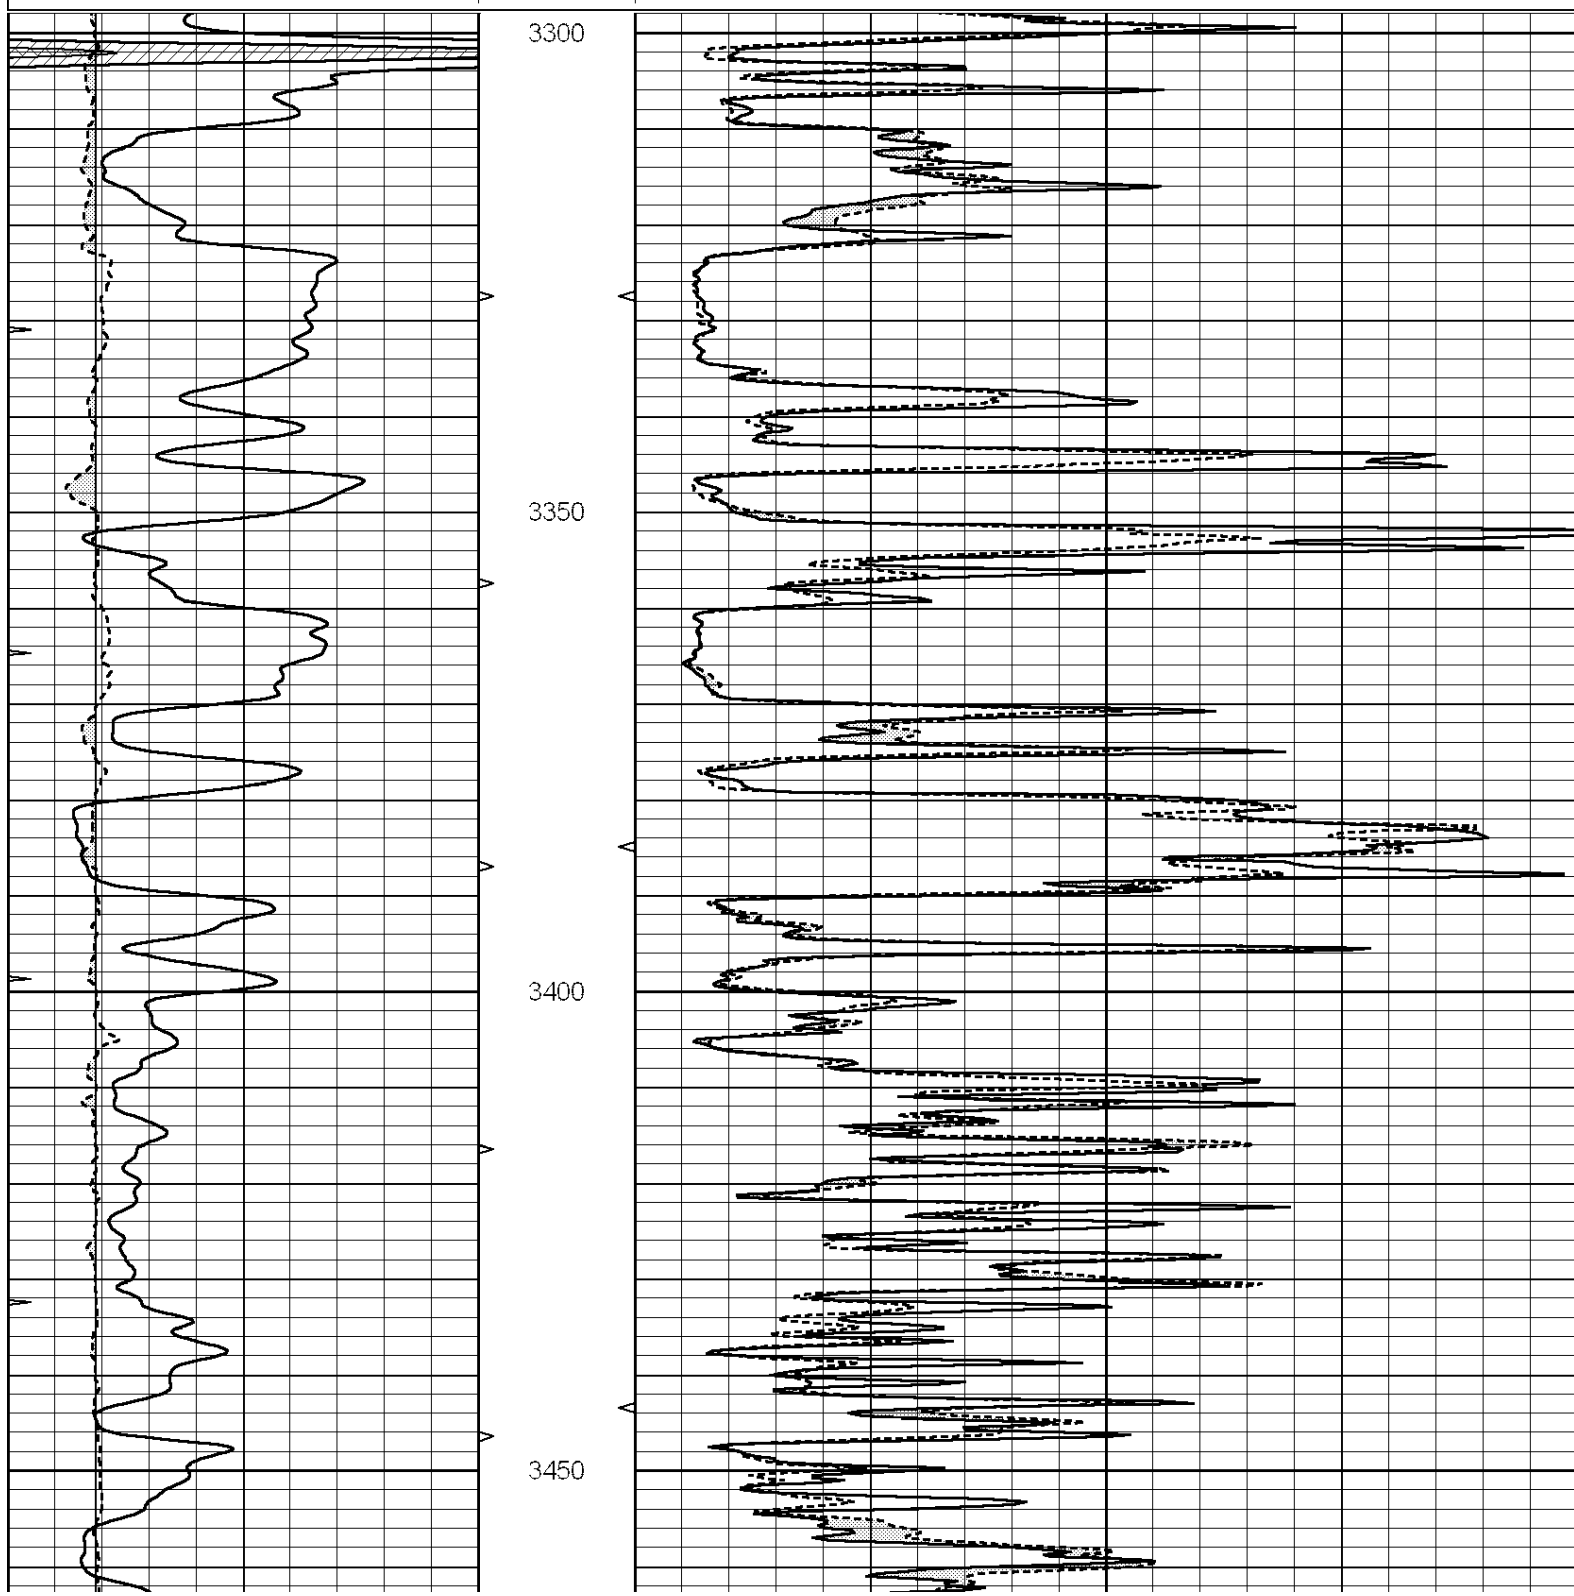

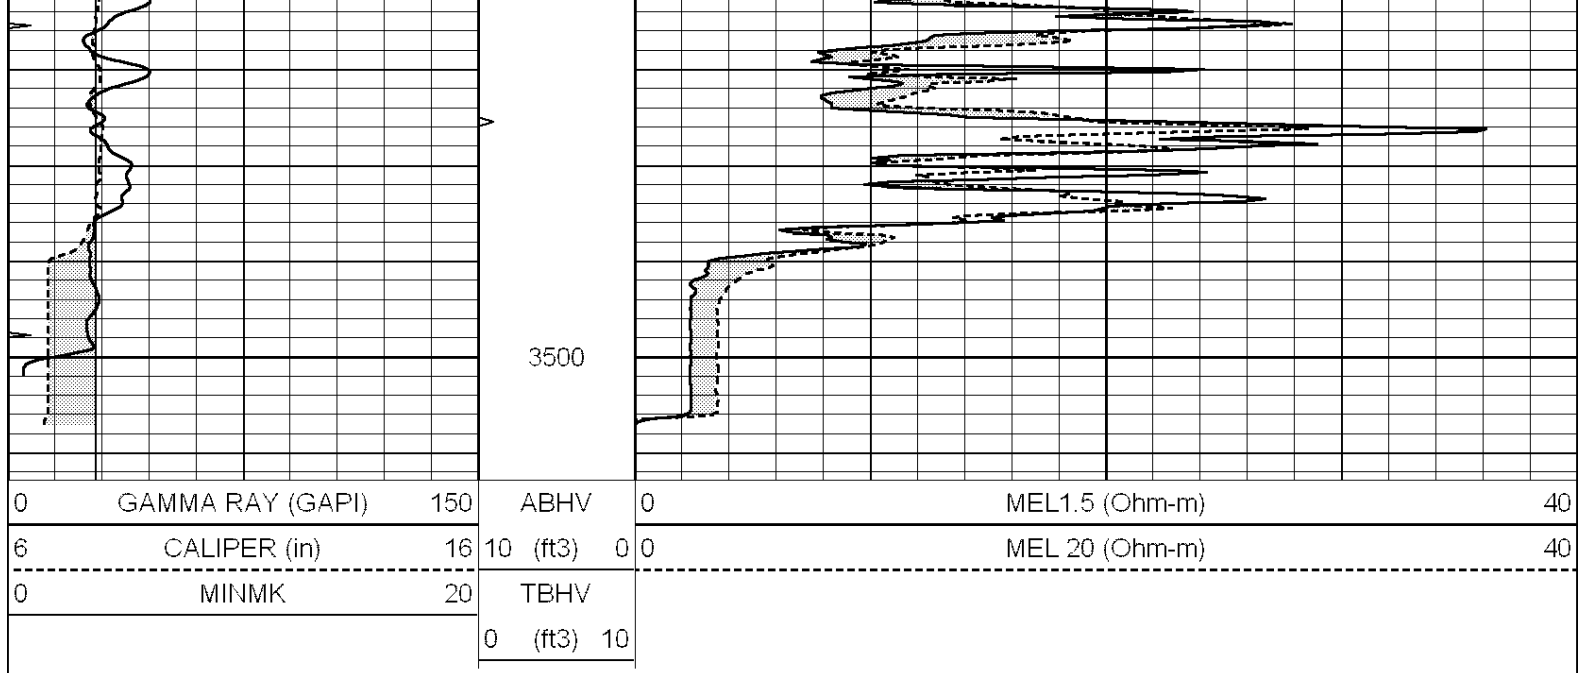

Calibration Report			
Database File:	26512ddn.db		
Dataset Pathname:	pass6.3		
Dataset Creation:	Mon Apr 27 00:01:58 2015 by Calc SOC 120430		
MICRO Calibration Report			
Serial Number:	070912		
Tool Model:	ProbeN		
Performed:	Sun Apr 26 23:15:48 2015		
Caliper Calibration:	Gain=2.504	Offset=6.776	
	Low Cal	High Cal	
References	8.000	15.000	
Readings	0.489	3.285	
1.5" Calibration:	Gain=28.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.239	
2" Calibration:	Gain=48.000	Offset=-1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.003	1.075	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Wed Feb 11 20:05:19 2015		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2000	GAPI/cps	