



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**COMPENSATED
DENSITY/NEUTRON
LOG**

Company	RITCHIE EXPLORATION, INC.		
Well	#1 SHULER 17 B		
Field	WILDCAT		
County	SHERIDAN	State	KANSAS
Location:	AP1 #: 15-179-21409-0000 1740' FNL & 712' FWL N/2 - SW - NW		Other Services DIL MEL
Permanent Datum	SEC 17	TWP 6S	RGE 29W
Log Measured From	GROUND LEVEL Elevation 2843 KELLY BUSHING 5' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Elevation	K.B. 2848 D.F. 2846 G.L. 2843		
Date	9/2/15		
Run Number	ONE		
Depth Driller	4555		
Depth Logger	4557		
Bottom Logged Interval	4533		
Top Log Interval	3400		
Casing Driller	8 5/8" @ 328		
Casing Logger	327		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2000 PPM	
Density / Viscosity	9.3/55		
pH / Fluid Loss	10.5/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.20 @ 85F		
Rmt @ Meas. Temp	.90 @ 85F		
Rmc @ Meas. Temp	1.44 @ 85F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.84 @ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	121F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	ADAM ELDANI		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING NABORS, HAYS, KS. (785) 628-6395
DIRECTIONS:
SELDEN, KS. - 1 WEST - 100 FT. SOUTH - EAST INTO

Database File:

30518ddn.db

Dataset Pathname:

pass3.2

Presentation Format:

den_neu


Dataset Creation:


Wed Sep 02 11:48:04 2015

Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25	CORRECTION (g/cc) 0.25
			0 (ft3)	10		

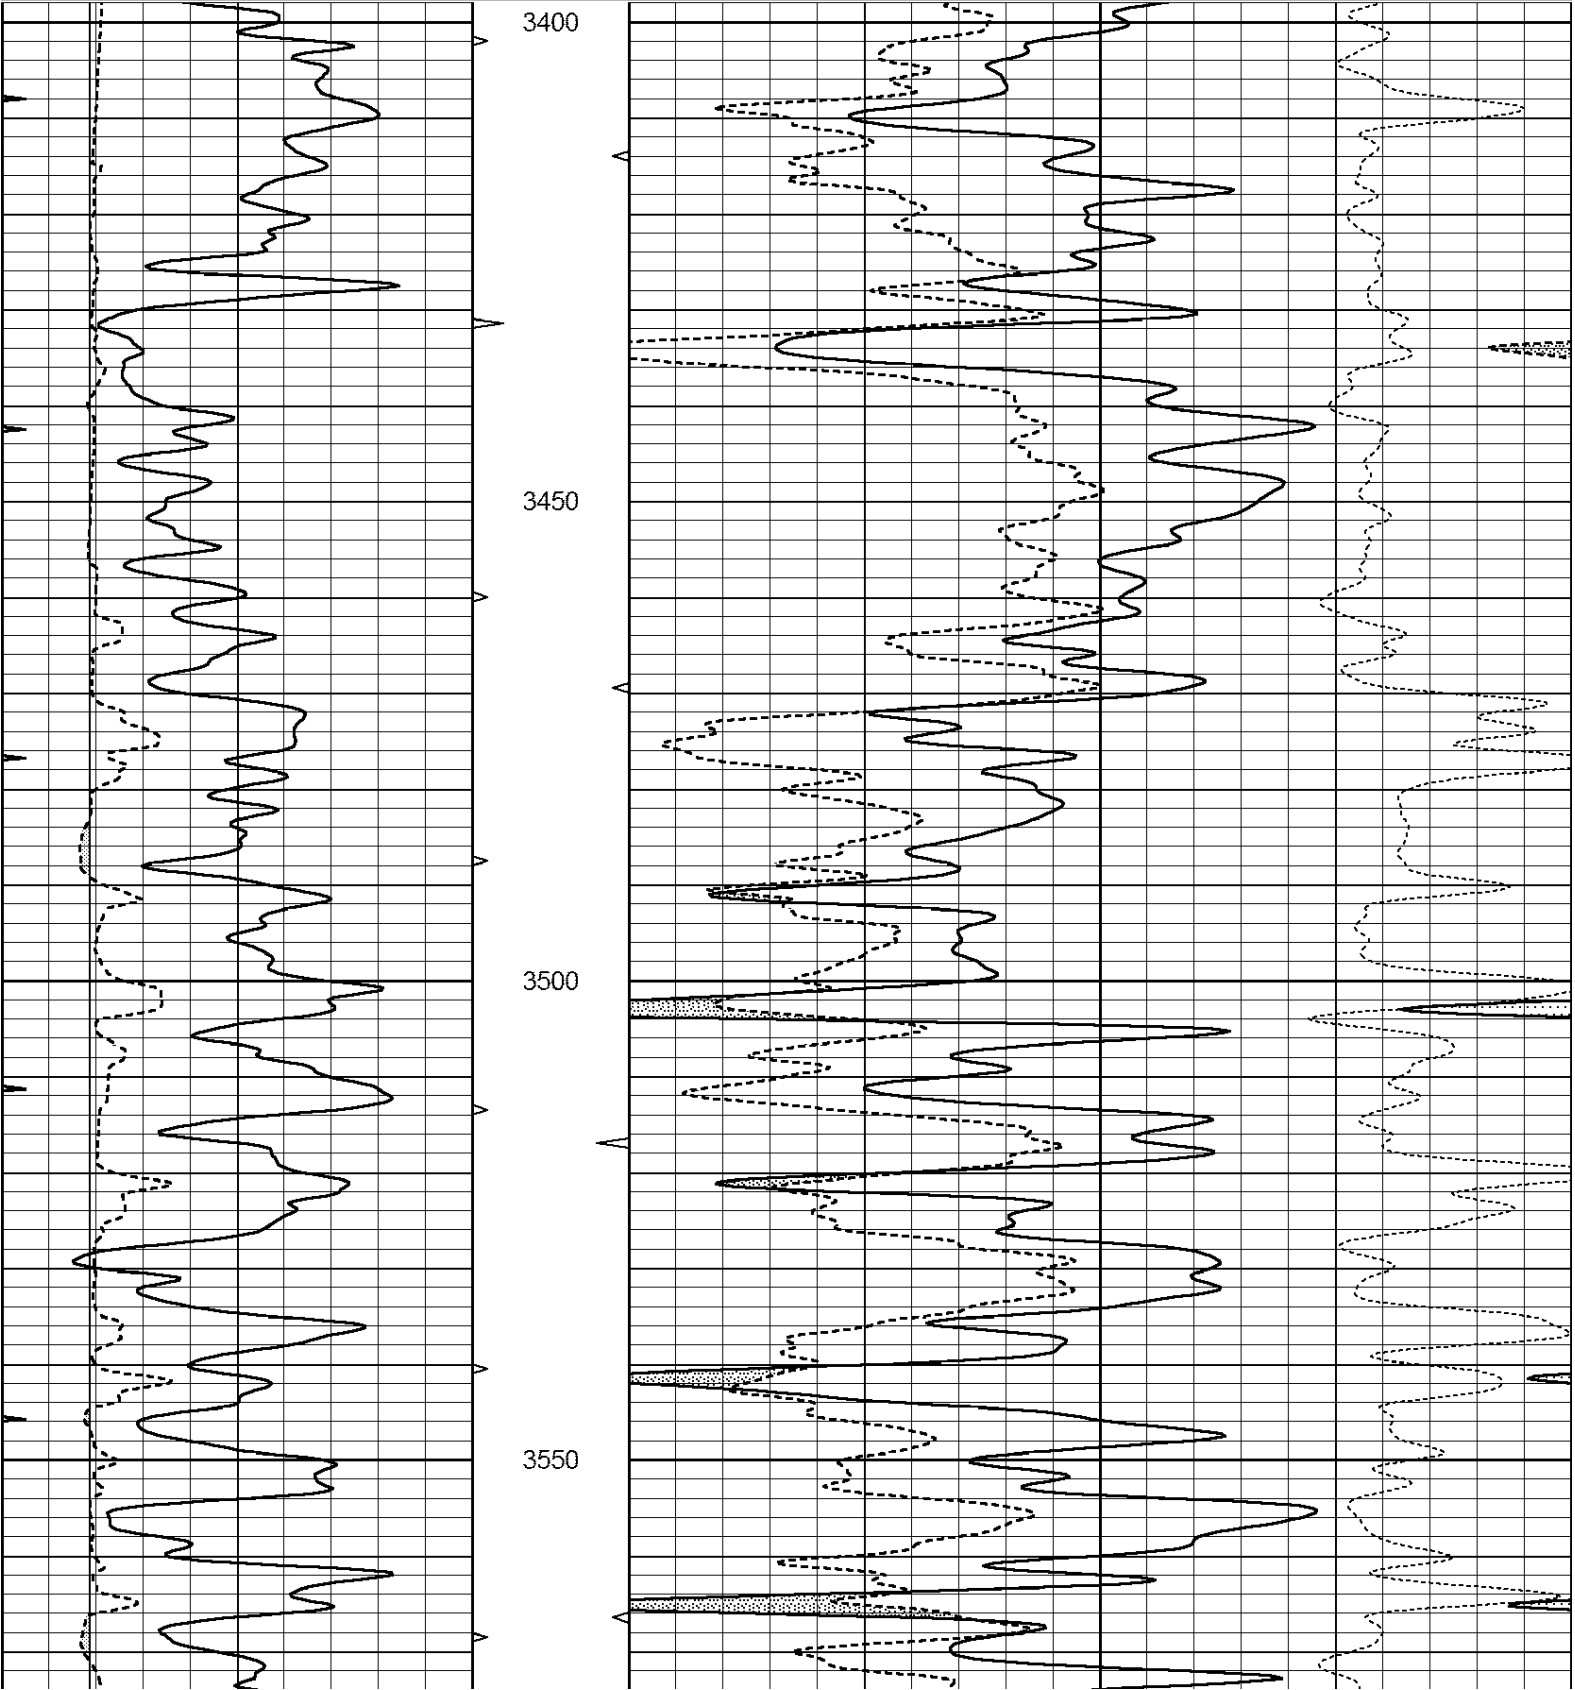

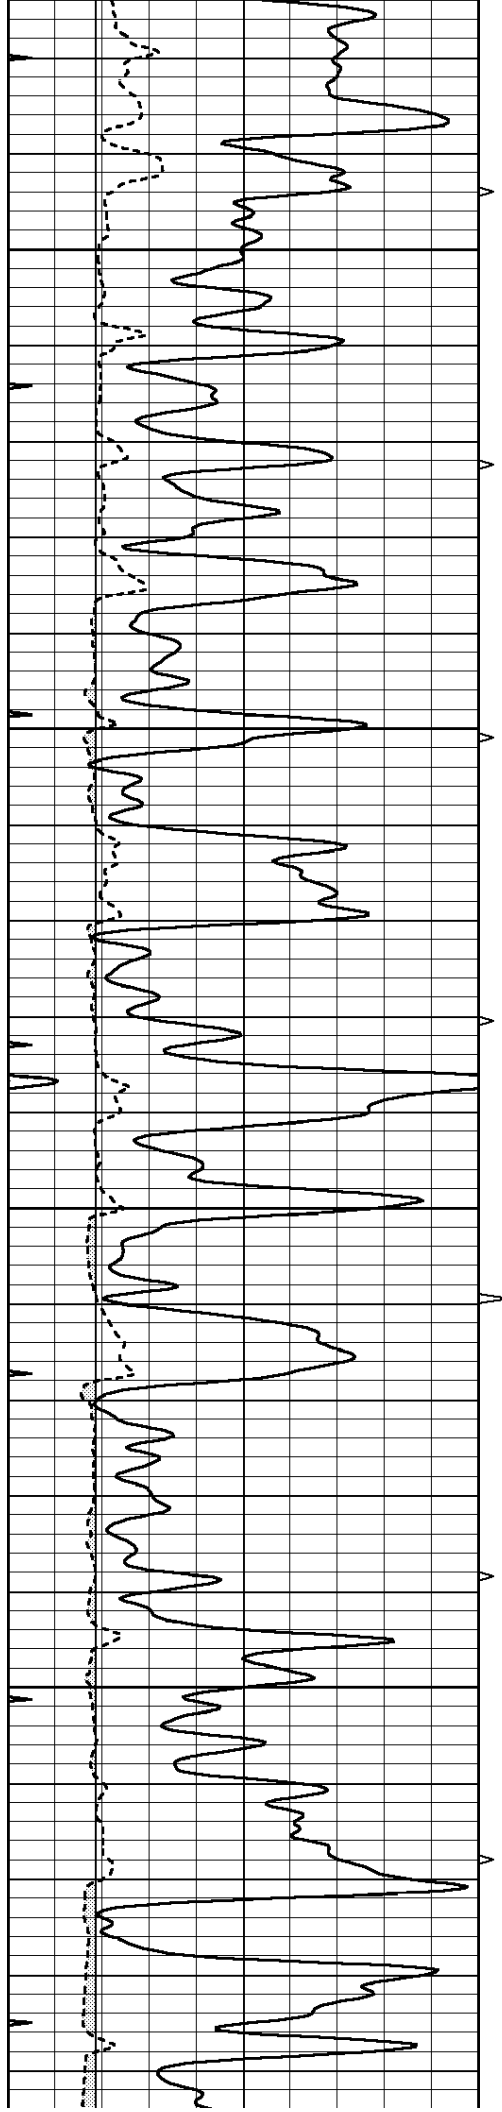




3600


3650

3700

3750

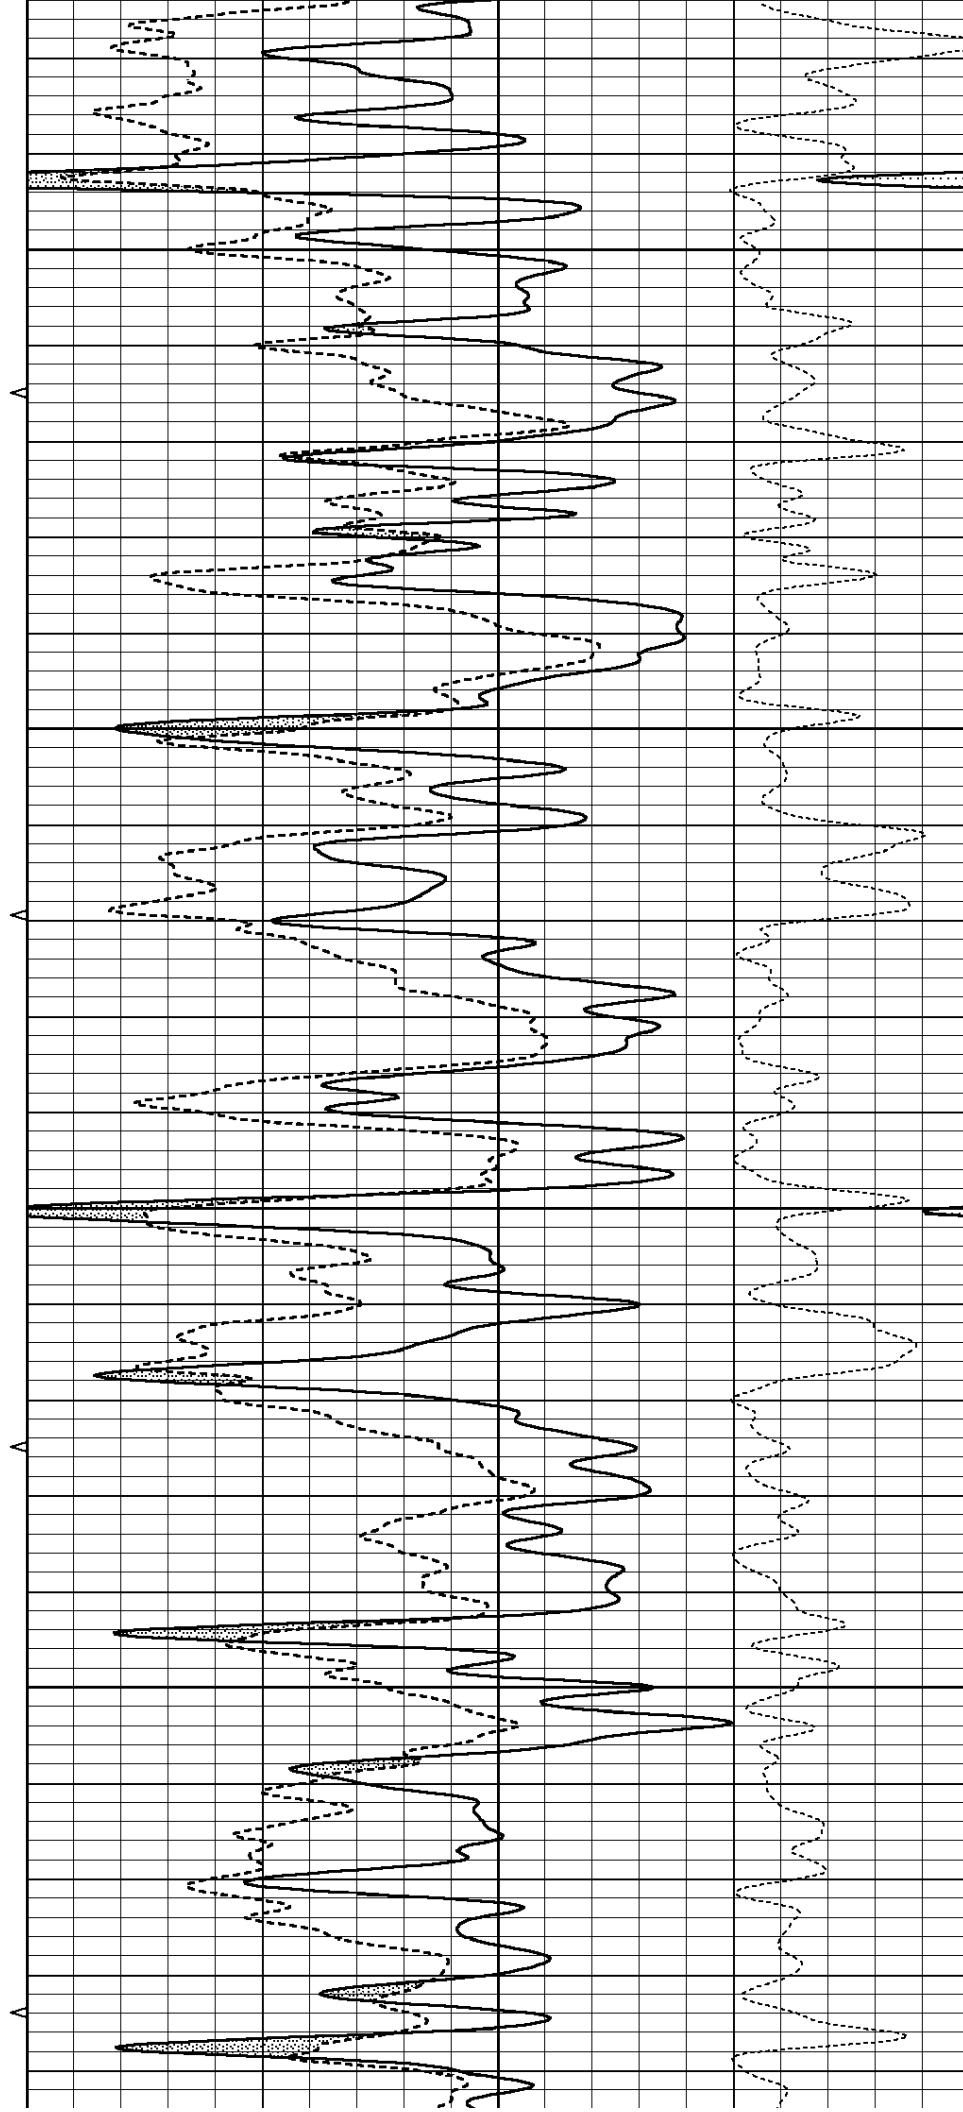

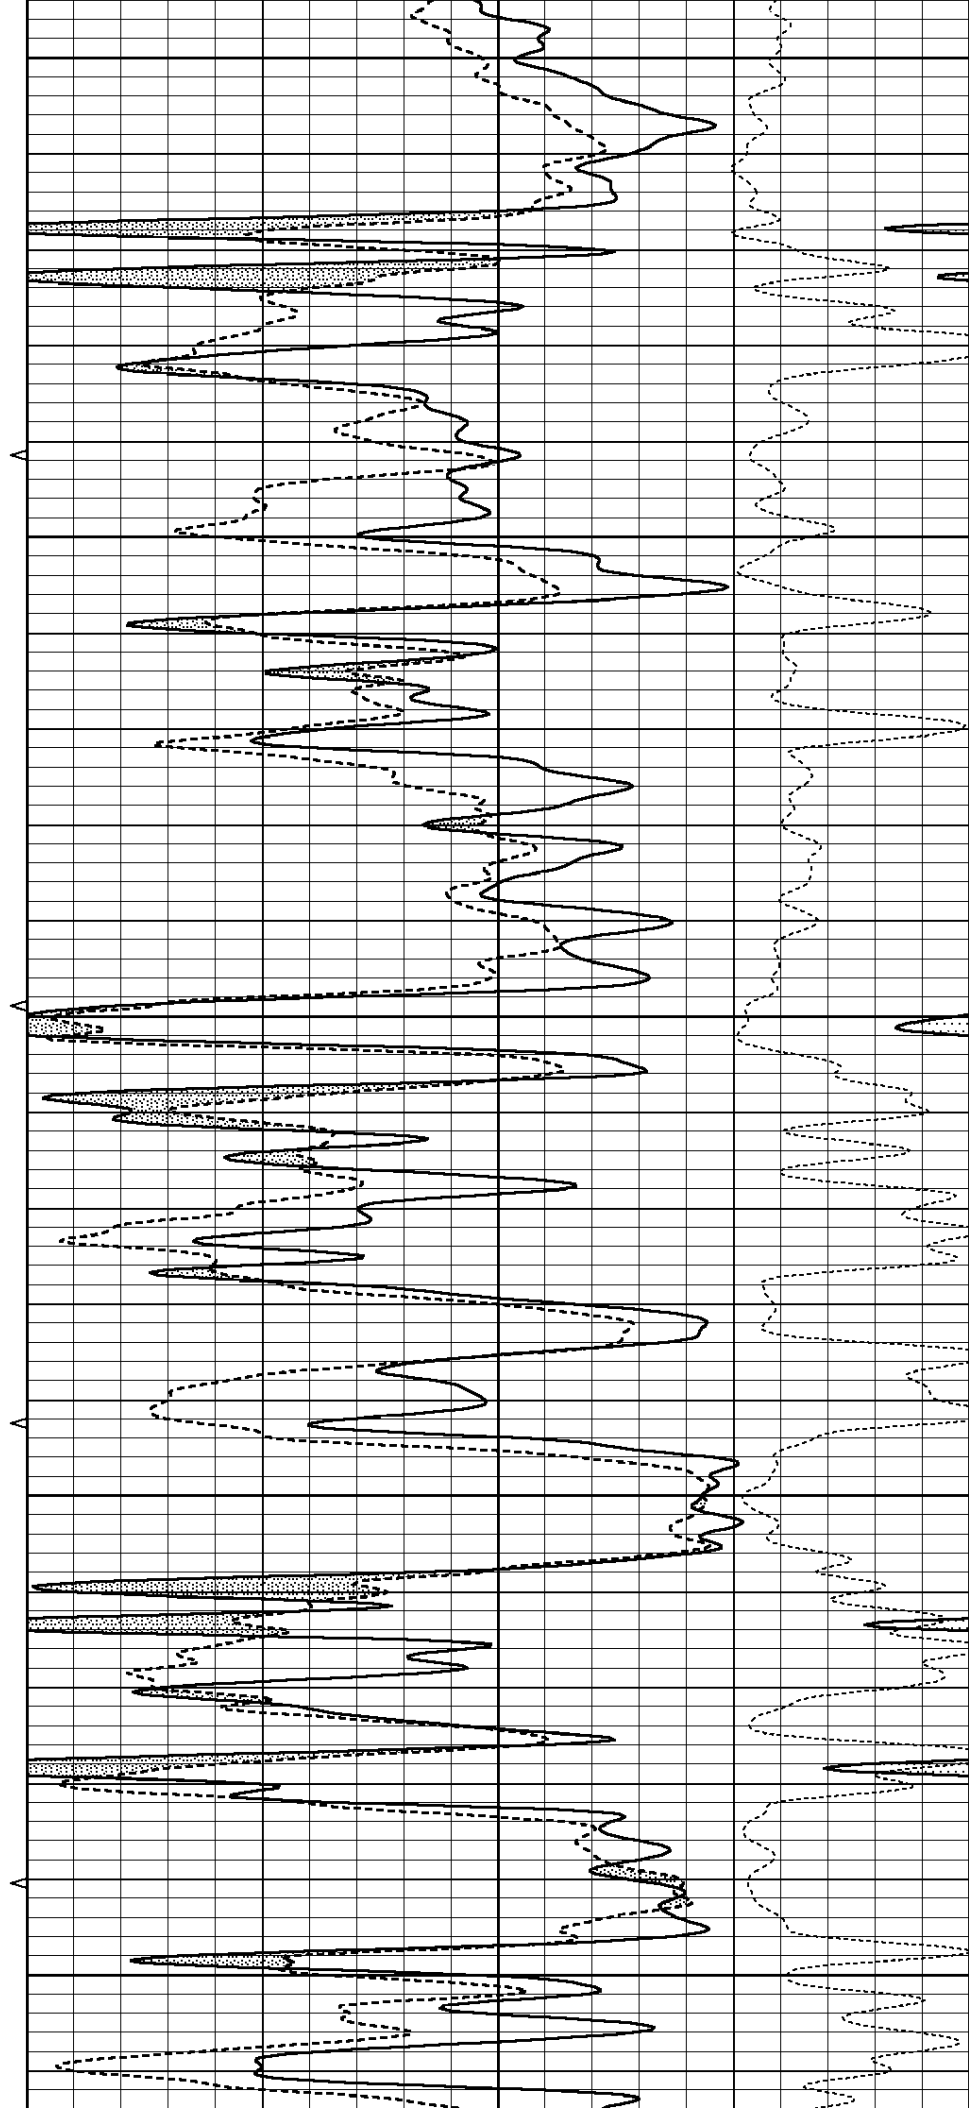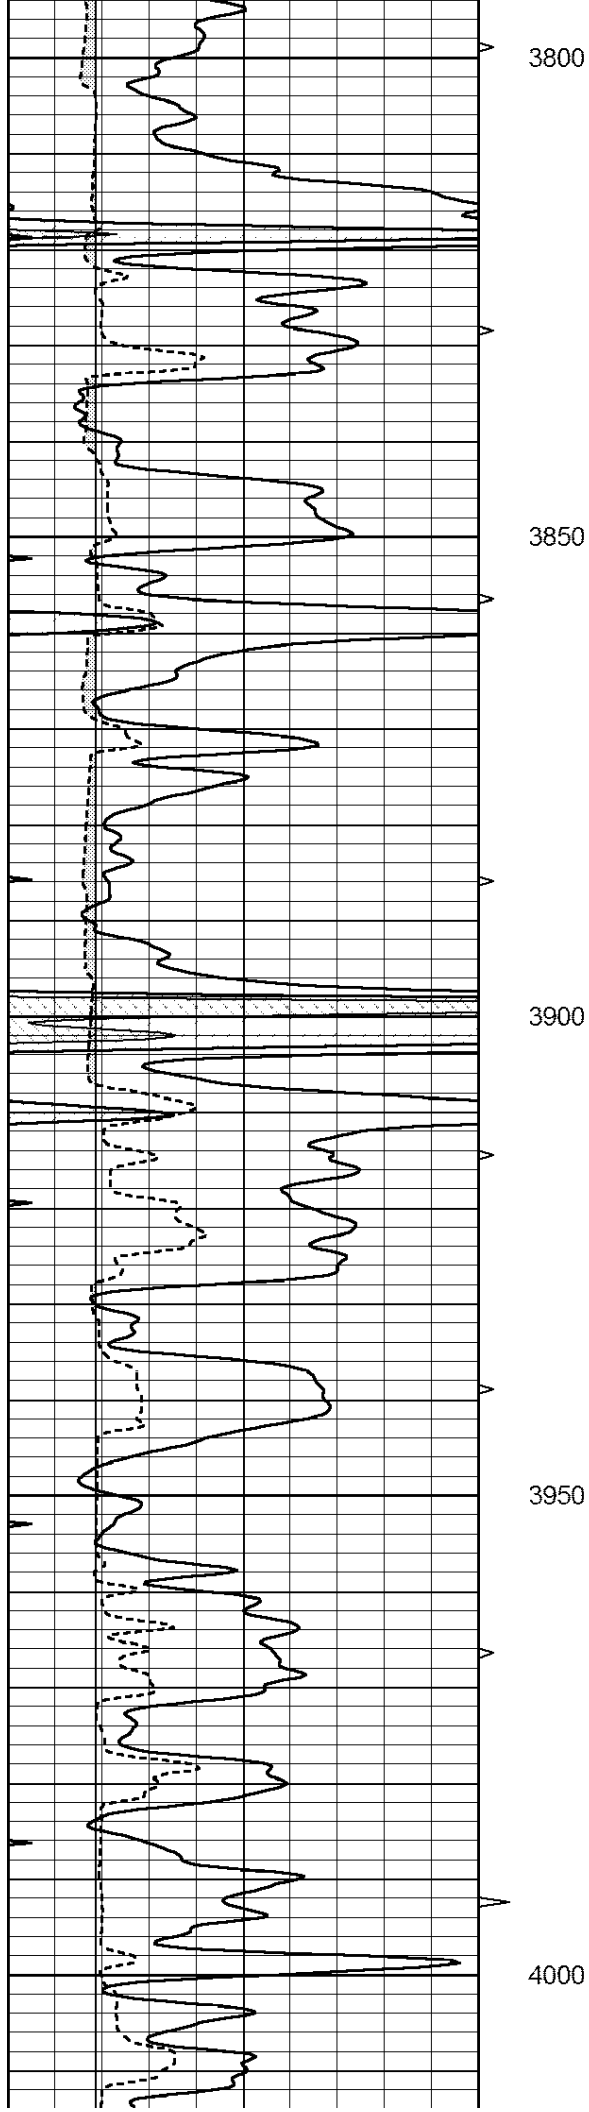

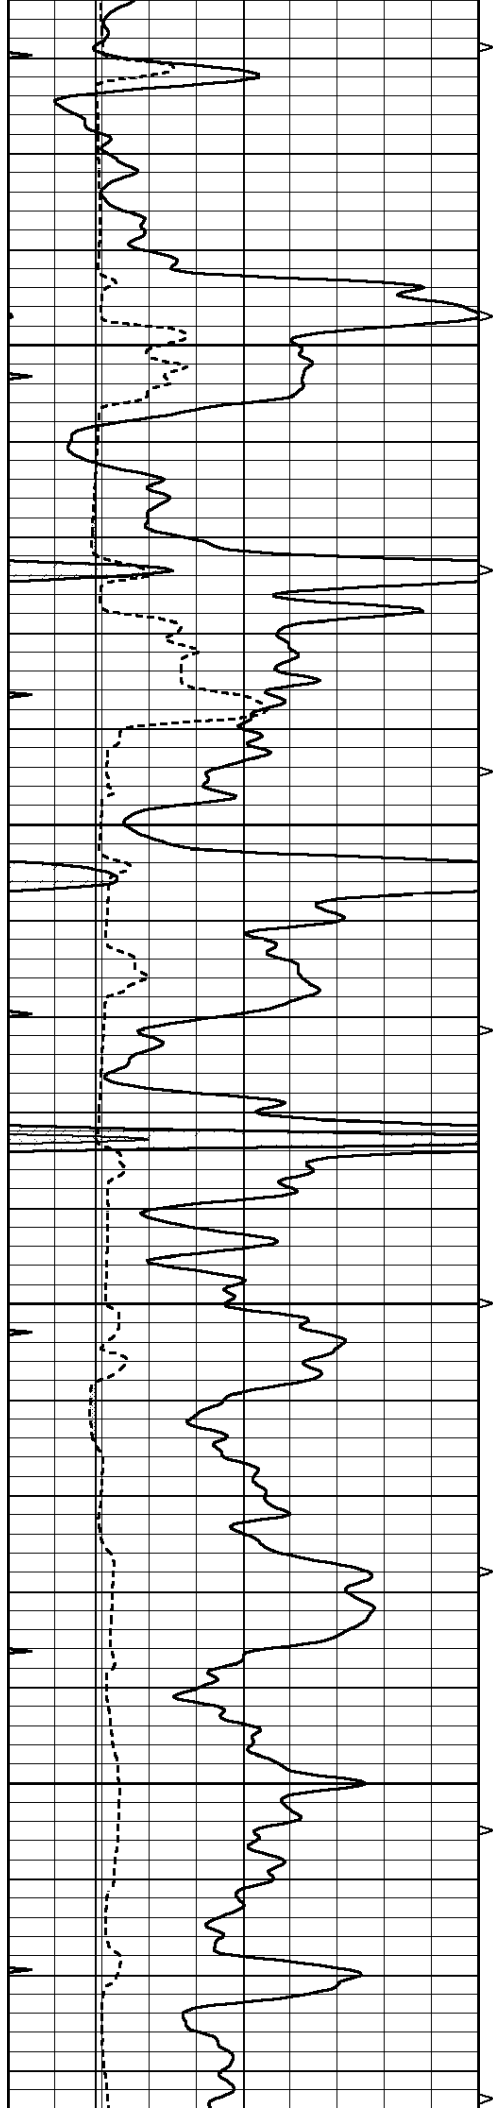




4050


4100

4150

4200

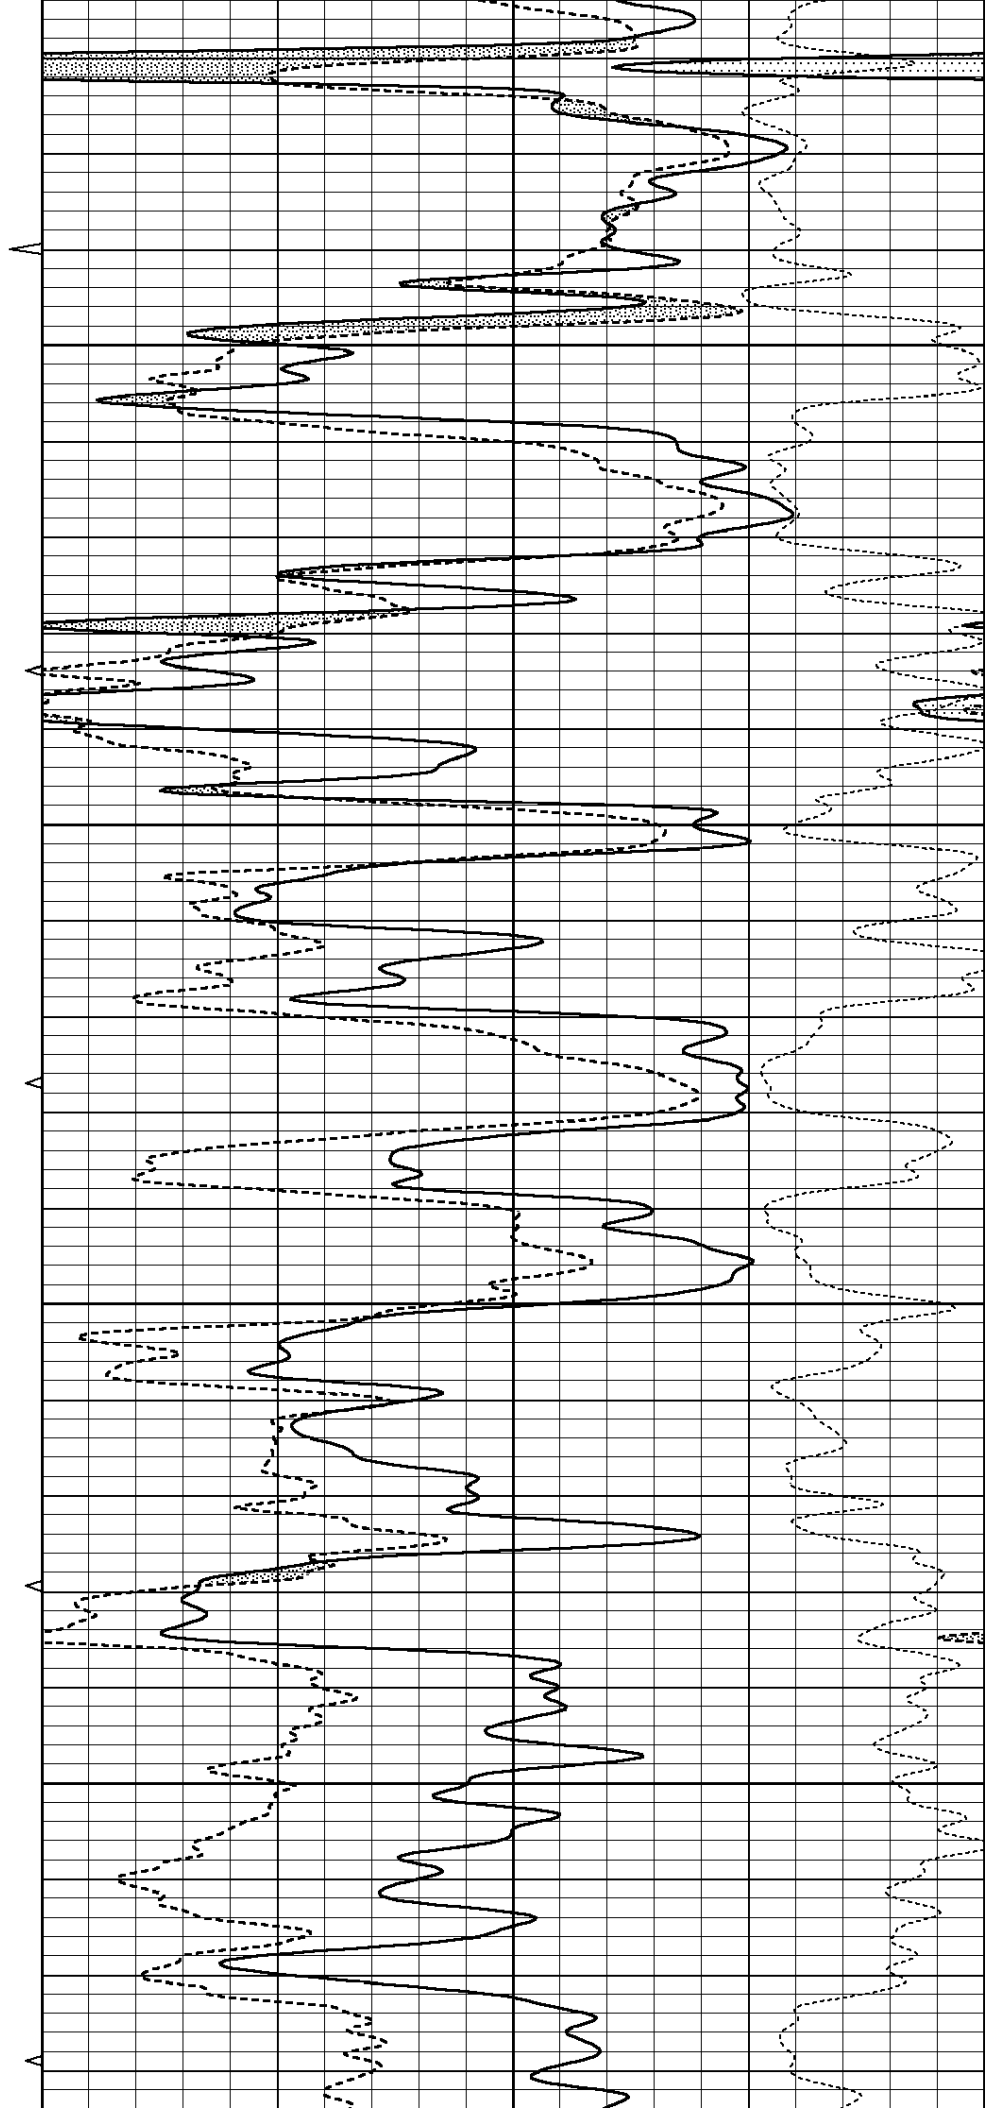

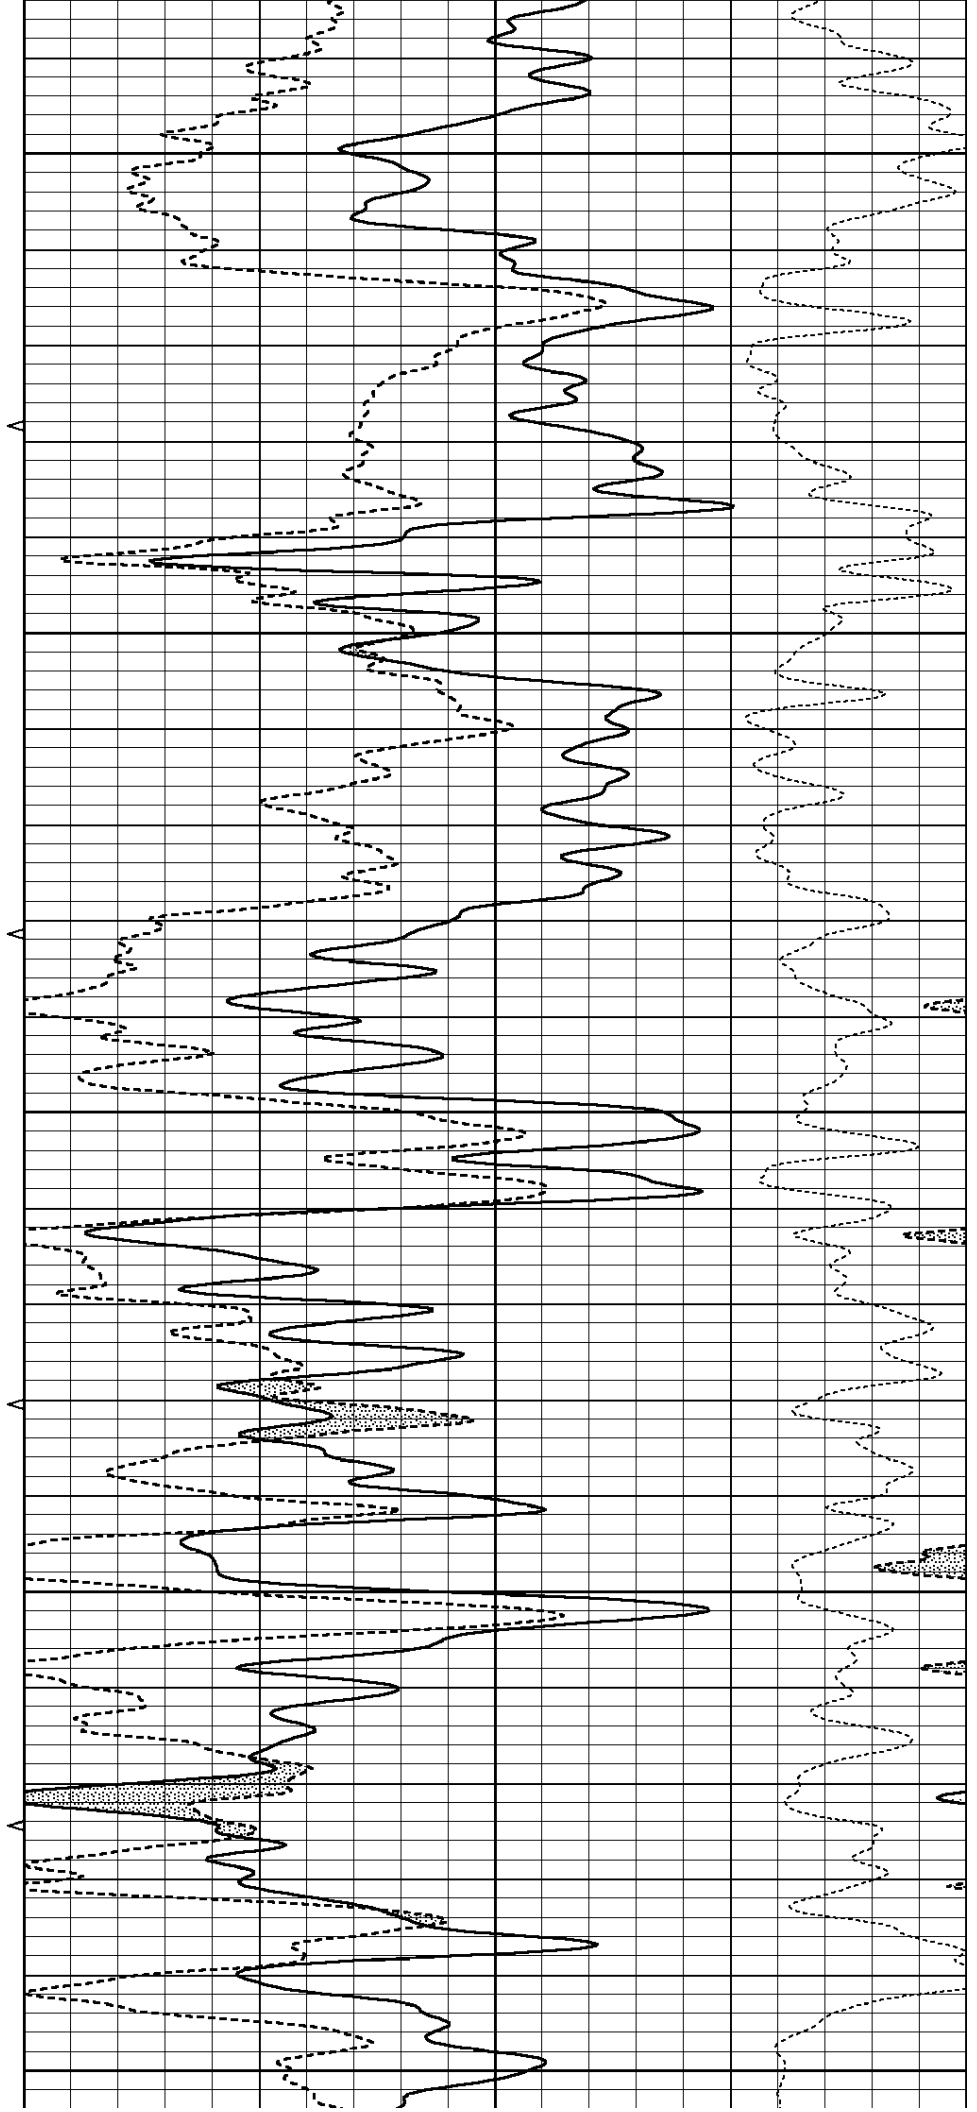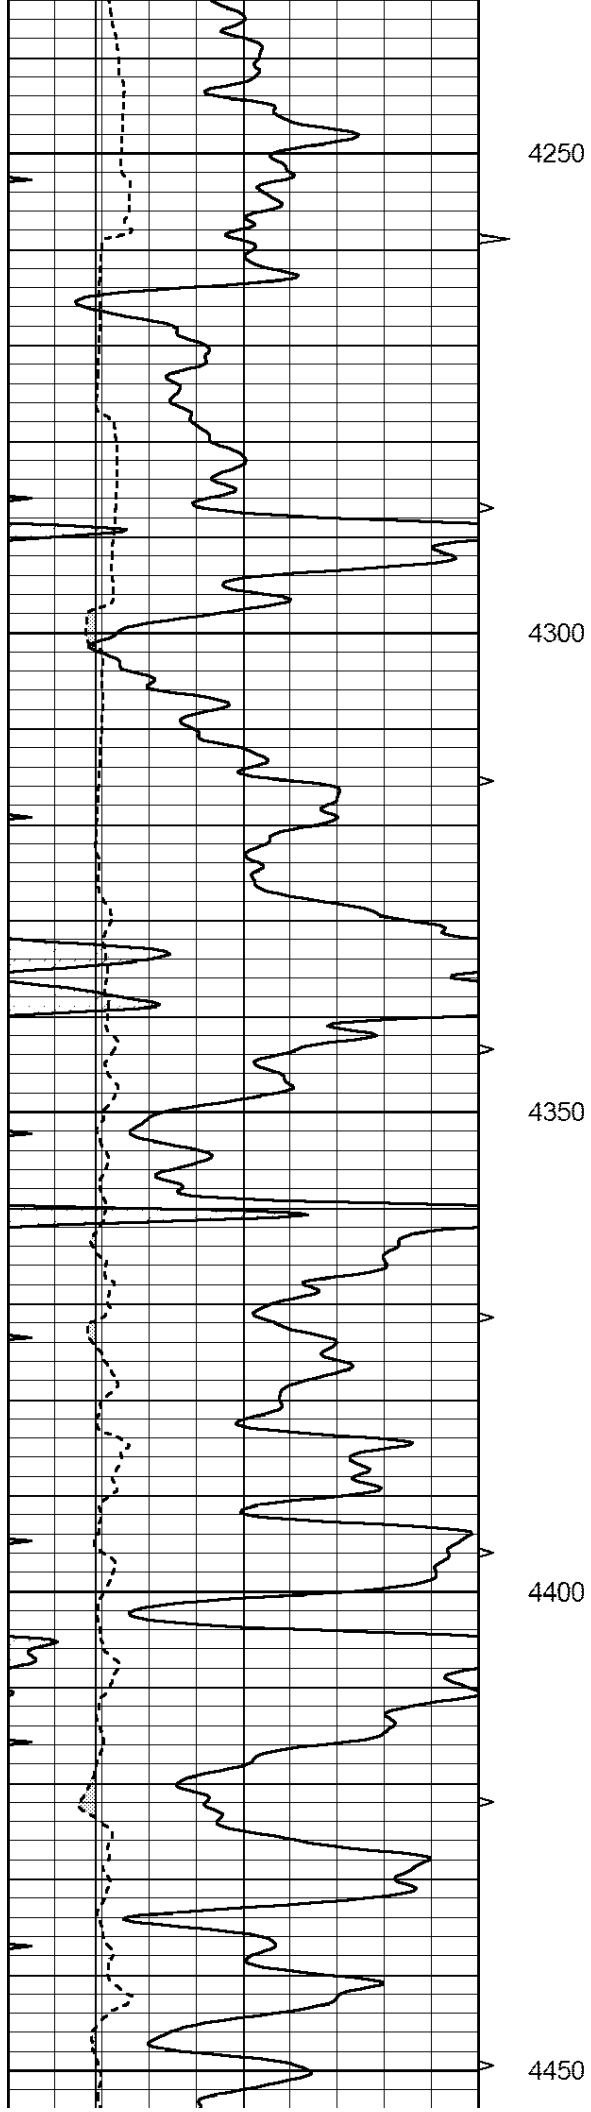


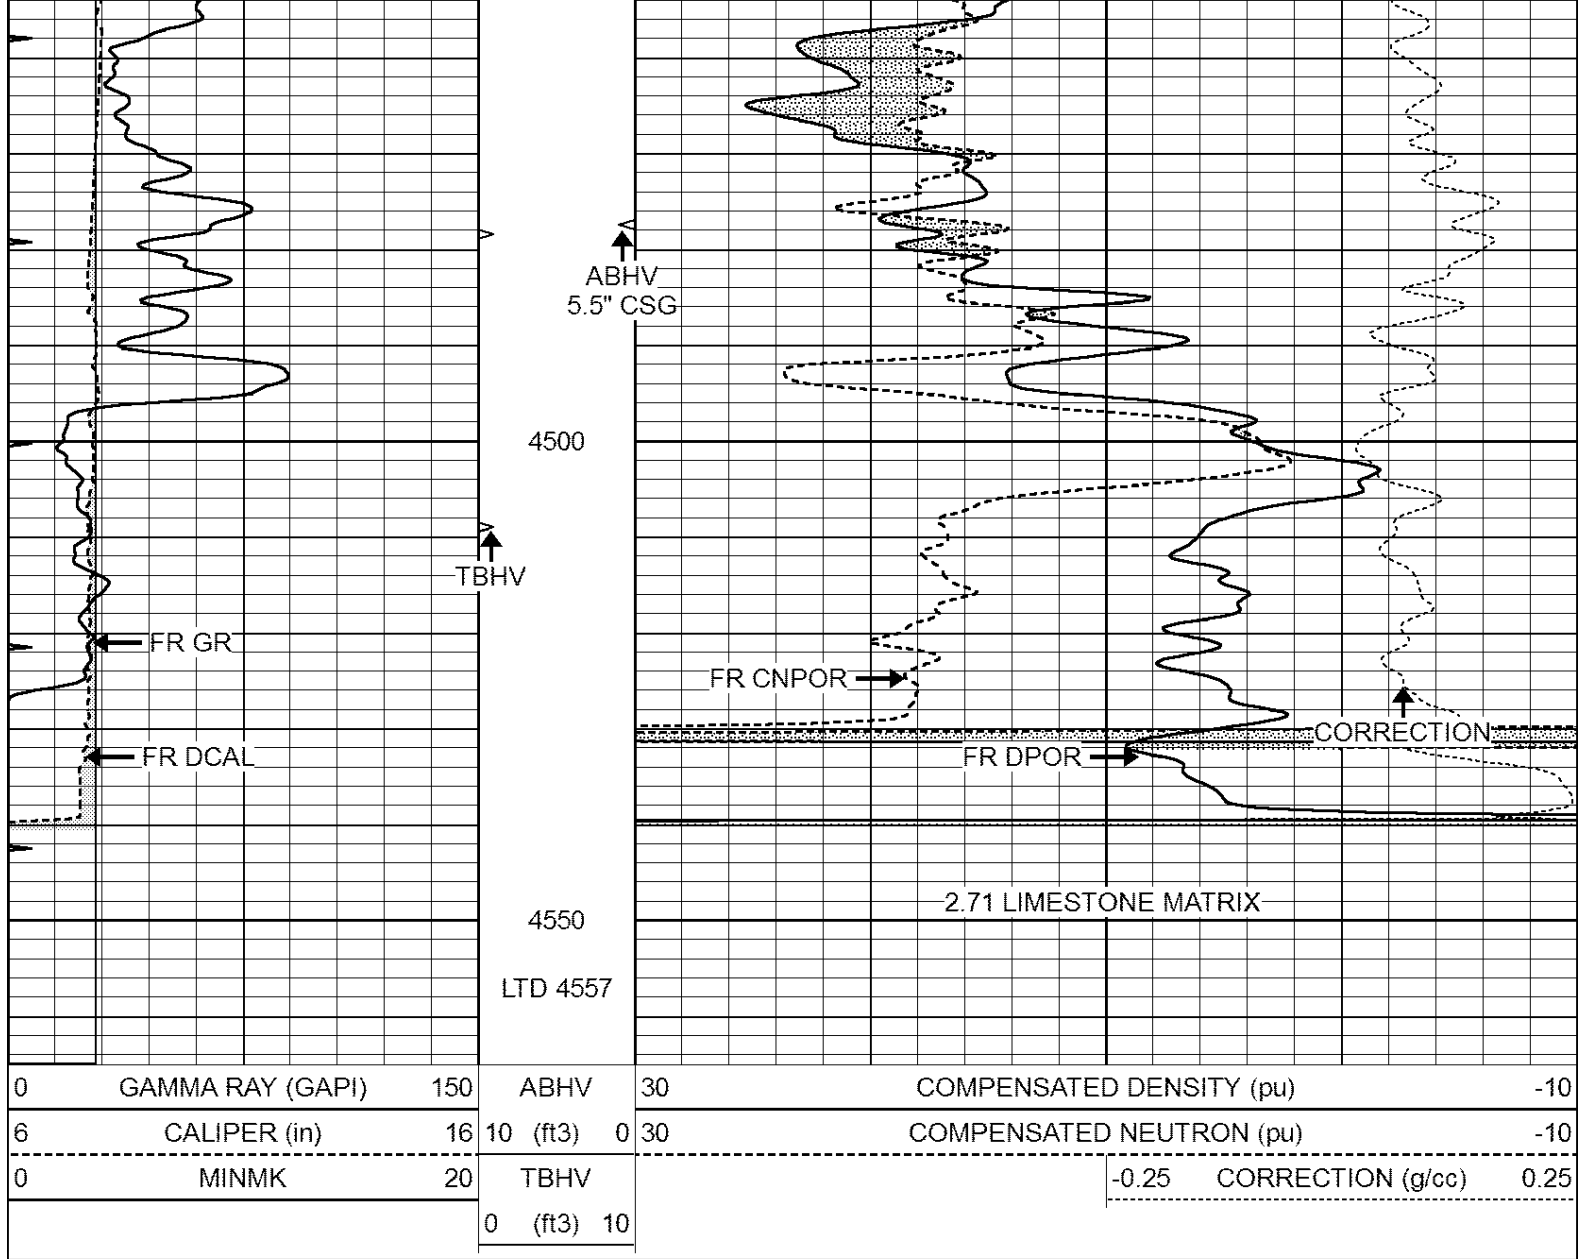


REPEAT SECTION

Database File: 30518ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: den_neu
 Dataset Creation: Wed Sep 02 11:28:57 2015 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

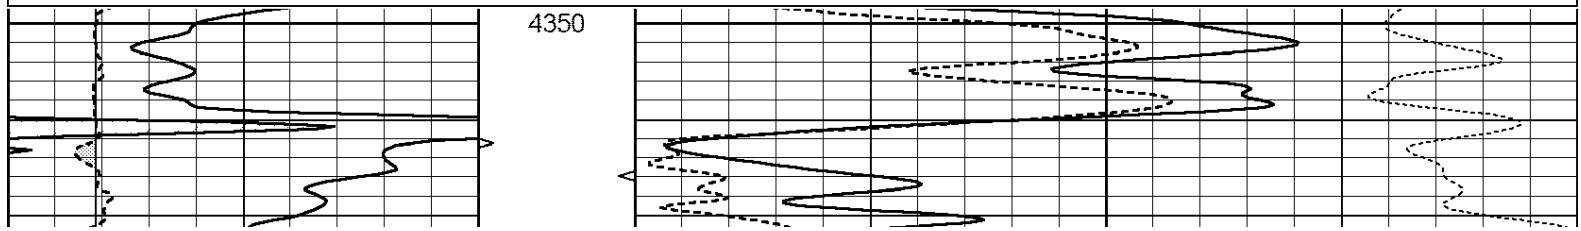

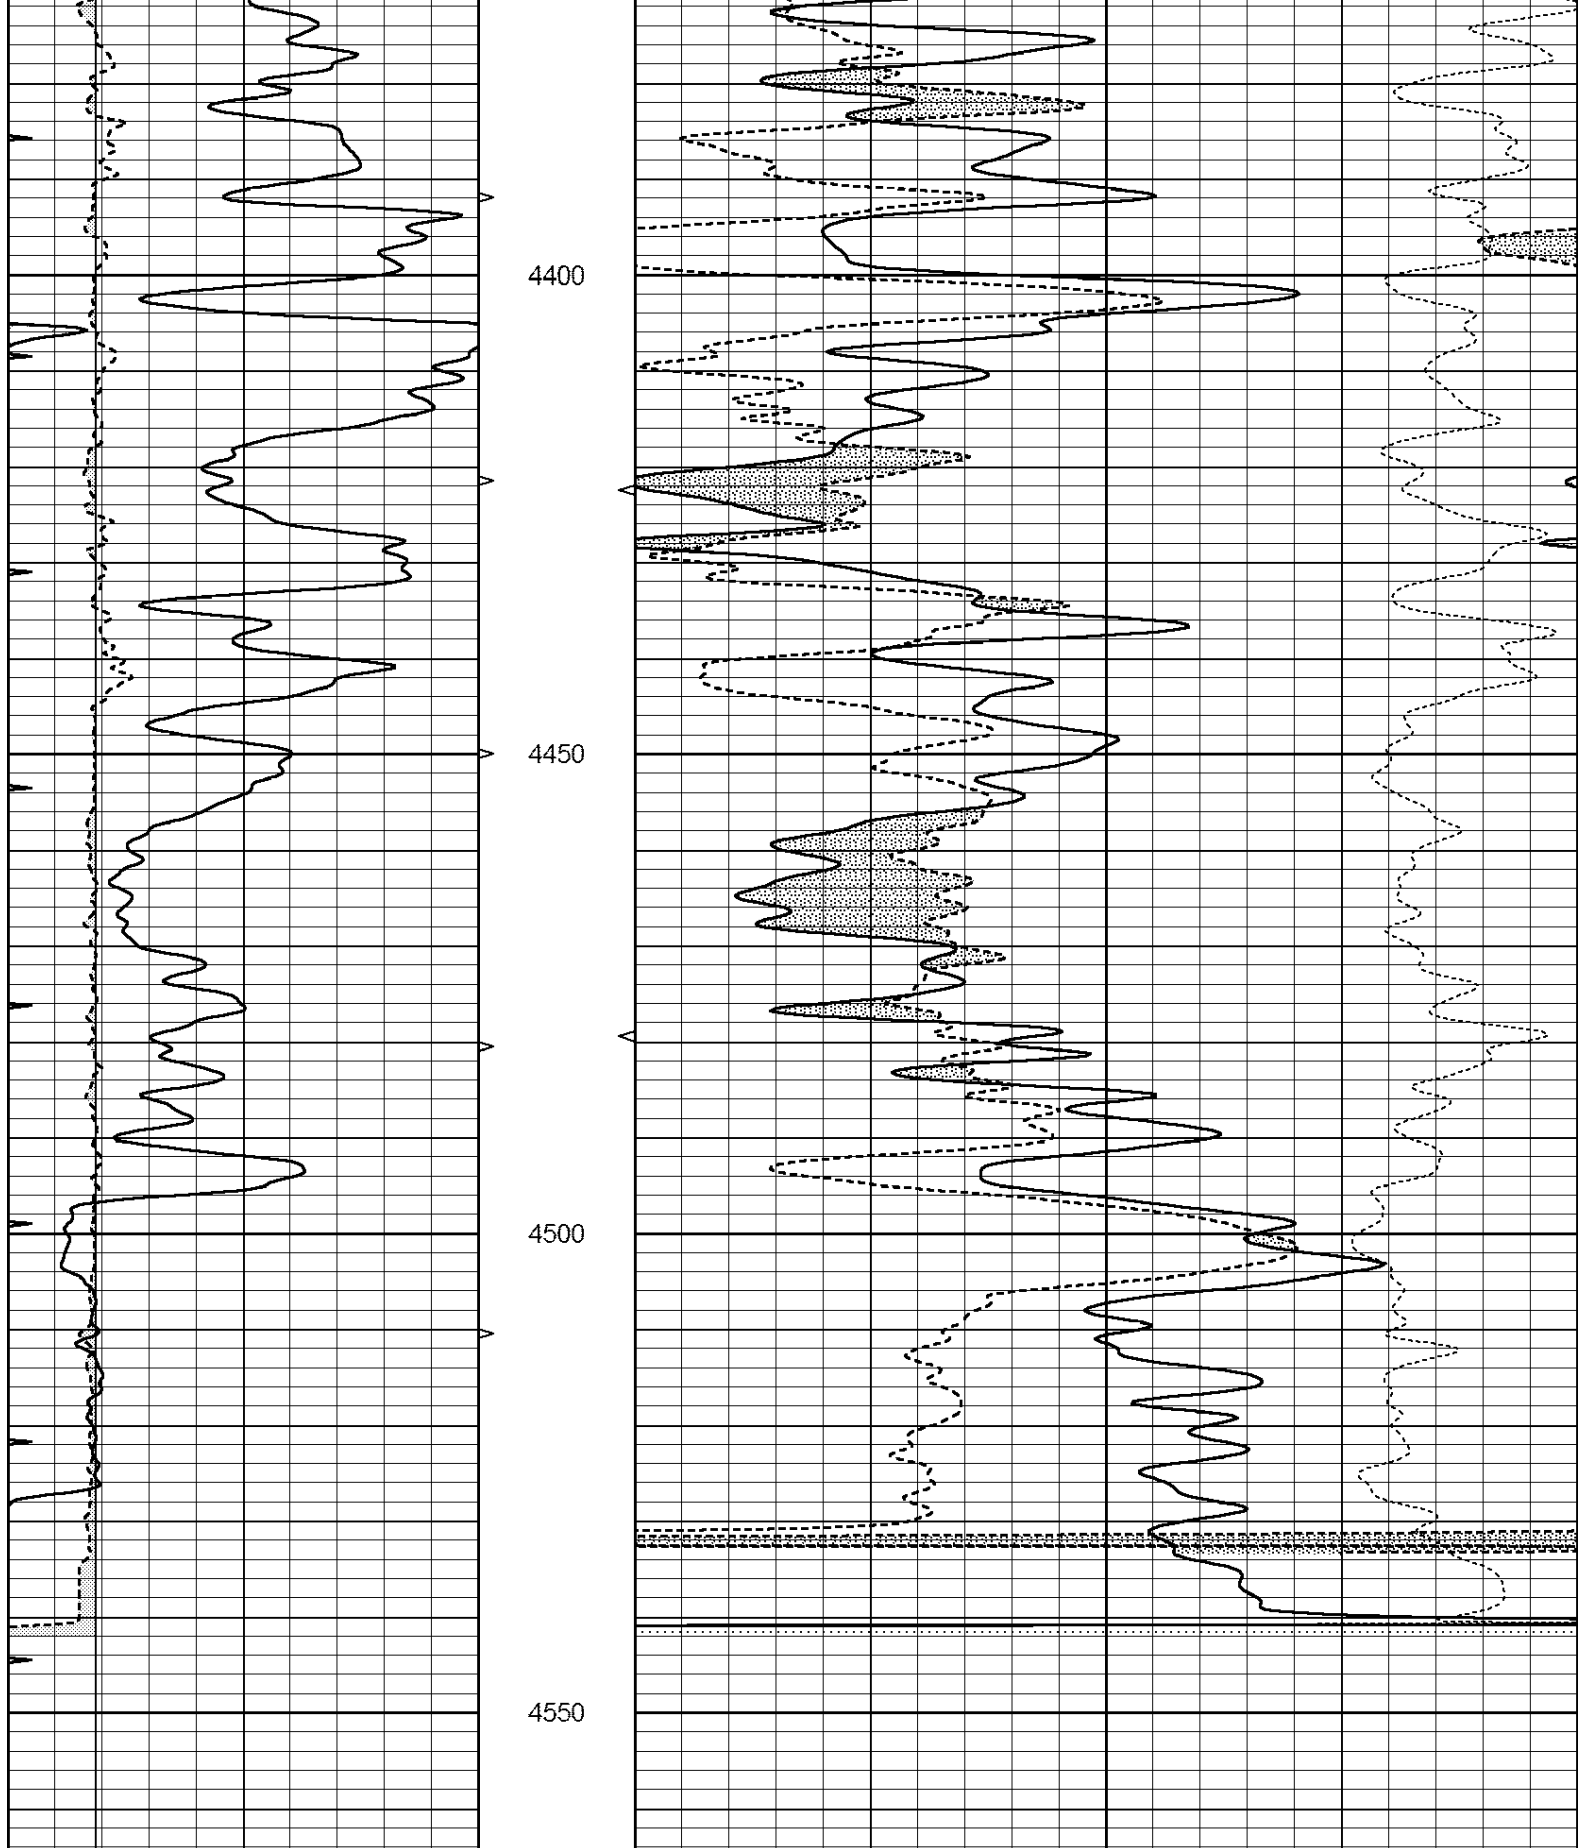

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)		-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)		-10
0	MINMK	20	TBHV		-0.25	CORRECTION (g/cc)	0.25
			0 (ft3)	10			

Calibration Report

Database File: 30518ddn.db
 Dataset Pathname: pass2.1
 Dataset Creation: Wed Sep 02 11:28:57 2015 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Sun May 10 19:54:09 2015
 Downhole Cal Performed: Mon Jul 28 11:08:27 2008
 After Survey Verification Performed: Mon Jul 28 11:08:27 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 006 Model: PRB

Master Calibration

Performed Wed Mar 12 14:26:38 2014

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1296.6	7199.0	2625.4	7833.2	cps
Window 2	1218.8	5956.6	2257.8	6372.0	cps
Window 3	926.7	2990.0	1318.7	3107.7	cps
Window 4	314.3	319.6	320.3	326.2	cps
Long Space	0.0	4737.9	1039.0	5153.3	cps
Short Space	1.3	1655.6	1074.2	1728.4	cps
Rho		1.7100	2.5960	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.1	Rib Slope	: 0.969	Density/Spine Ratio	: 0.562
Spine Angle	: 74.1	Spine Slope	: 3.507	Spine Intercept	: -17.5

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

--

Compensated Neutron Calibration Report
--

Serial Number:	6I
Tool Model:	G

CALIBRATION						
	Detector	Readings		Target		Normalization
	Short Space	1.00	cps	1.00	cps	1.0000
	Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION						
	Detector	Readings		Measured	Target	
1)	Short Space	cps				
	Long Space	cps		pu	pu	
2)	Short Space	cps				
	Long Space	cps		pu		
3)	Short Space	cps				
	Long Space	cps		pu		

POST-SURVEY VERIFICATION						
	Detector	Readings		Measured	Target	
1)	Short Space	cps				
	Long Space	cps		pu	pu	
2)	Short Space	cps				
	Long Space	cps		pu	pu	
3)	Short Space	cps				
	Long Space	cps		pu	pu	

Gamma Ray Calibration Report

Serial Number:	GR6
----------------	-----

Tool Model:	OPEN
Performed:	Sun May 10 18:59:16 2015

Calibrator Value:	150.0	GAPI
-------------------	-------	------

Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps

Sensitivity:	0.8000	GAPI/cps
--------------	--------	----------