



MIDWEST SURVEYS
LOGGING - PERFORATING - CONSULTING SERVICES
P.O. Box 66, Osawatomie, KS 66064
913 / 755 - 2128

GAMMA RAY / NEUTRON / CCL

File No.

Company Grand Mesa Operating Company

Well Vesecky No. 2-6i

Field Vinland Southeast

County Douglas State Kansas

Location 529' FNL & 1728' FWL

SE-NW-NE-NW

Sec. 23 Twp. 14S Rge. 20E

Permanent Datum GL

Log Measured From GL

Drilling Measured From GL

Date 10-22-2015

Run Number One

Depth Driller 762.0

Depth Logger 751.2

Bottom Logged Interval 750.2

Top Log Interval 20.0

Fluid Level Full

Type Fluid Water

Density / Viscosity NA

Salinity - PPM Cl NA

Max Recorded Temp NA

Estimated Cement Top 0.0

Equipment No. 102

Location Osawatomie

Recorded By Gary Windisch

Witnessed By Jerid Hoehn

BORE-HOLE RECORD

NO BIT FROM TO SIZE WGT. FROM TO

One 11.00" 0.0 7.00" 17.0 # 0.0 45.20 45.20

Two 5.875" 45.20 762.0 2.875" 6.5 # 0.0 751.65 751.65



<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :
McGown Drilling, Inc.

Database File: vesecky 2-6i.db
Dataset Pathname: pass1
Presentation Format: gr-n-ccl
Dataset Creation: Thu Oct 22 09:00:42 2015 by Log SCH 111116
Charted by: Depth in Feet scaled 1:240

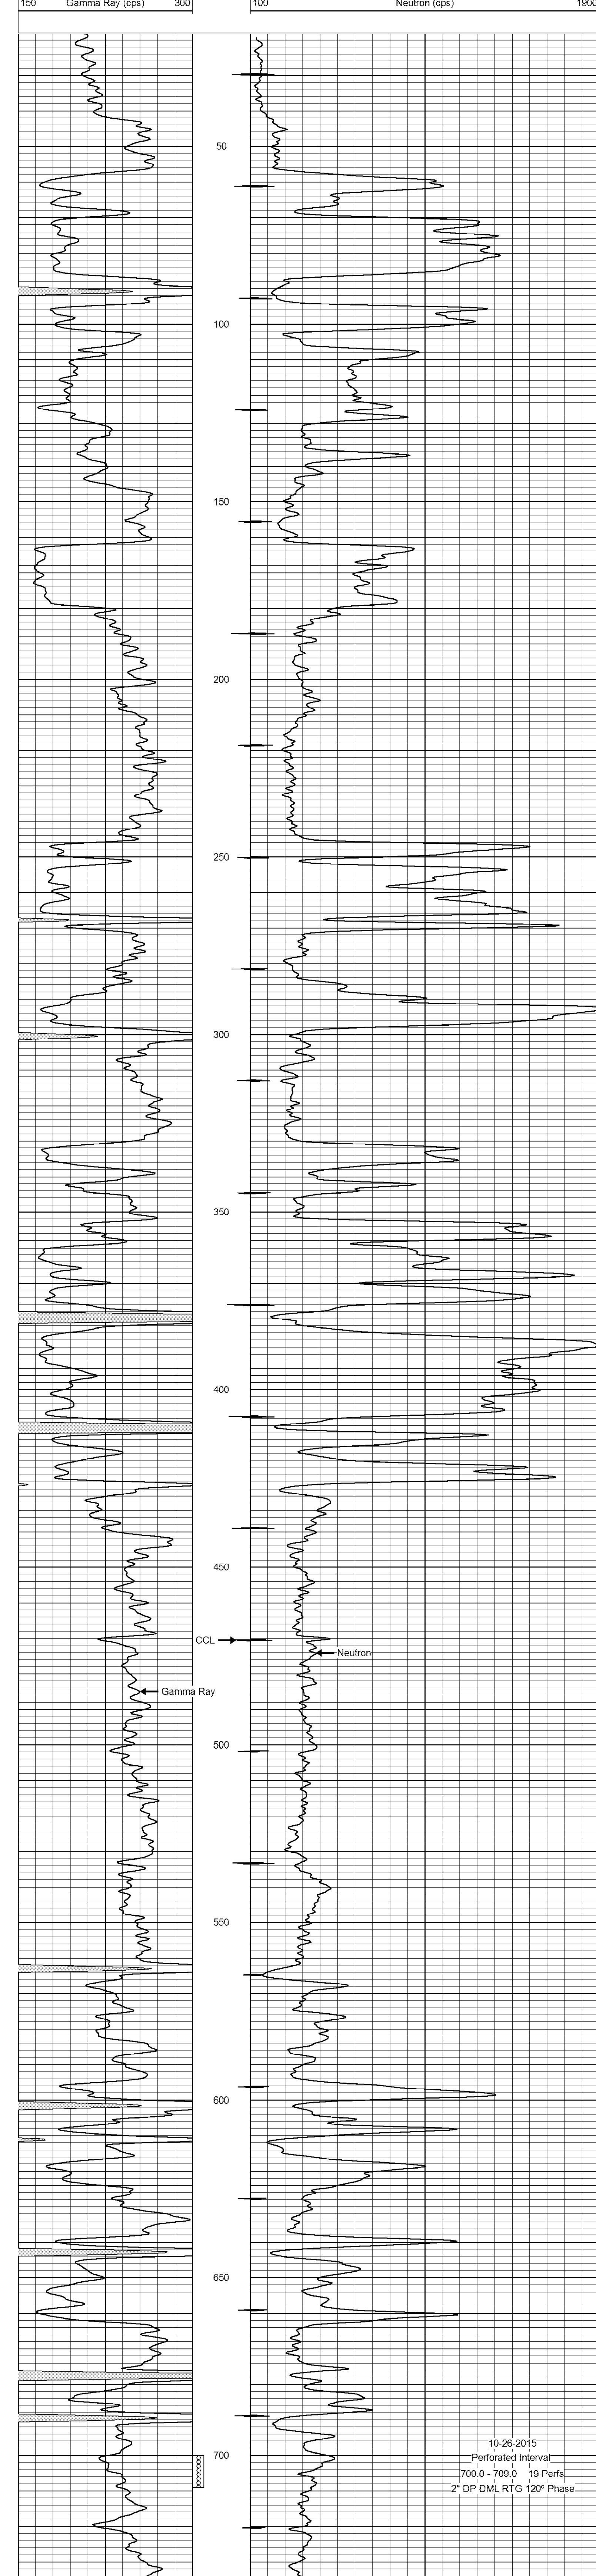

10-26-2015
Perforated Interval
700.0 - 709.0 19 Perfs
2" DP DML RTG 120° Phase

