



MICRO LOG

Company	DOUBLE D'S, LLC.		
Well	CECIL #1		
Field	WILDCAT		
County	ELLIS	State	KANSAS
Location:	APL # : 15-051-26908-0000		Other Services CDL/CNL DIL/SON
Permanent Datum	GROUND LEVEL	Elevation	1956
Log Measured From	KELLY BUSHING 10' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	5/3/18		
Run Number	TWO		
Depth Driller	3669		
Depth Logger	3668		
Bottom Logged Interval	3652		
Top Log Interval	2800		
Casing Driller	8 5/8"@1141'		
Casing Logger	1141		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 11,400 PPM	
Density / Viscosity	9.3/54		
pH / Fluid Loss	10.0/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.700@72F		
Rmf @ Meas. Temp	.525@72F		
Rmc @ Meas. Temp	.840@72F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.446@113F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	9:15 P.M.		
Maximum Recorded Temperature	113F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	MARC DOWNING	DOC BIEKER	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
SCHOENCHEN, KS. & HWY 183, 1N., 2W., S. INTO AT SAND PIT DRIVE






MAIN SECTION

Database File: 2489ddn.db
 Dataset Pathname: pass6.2
 Presentation Format: micro
 Dataset Creation: Thu May 03 21:50:22 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

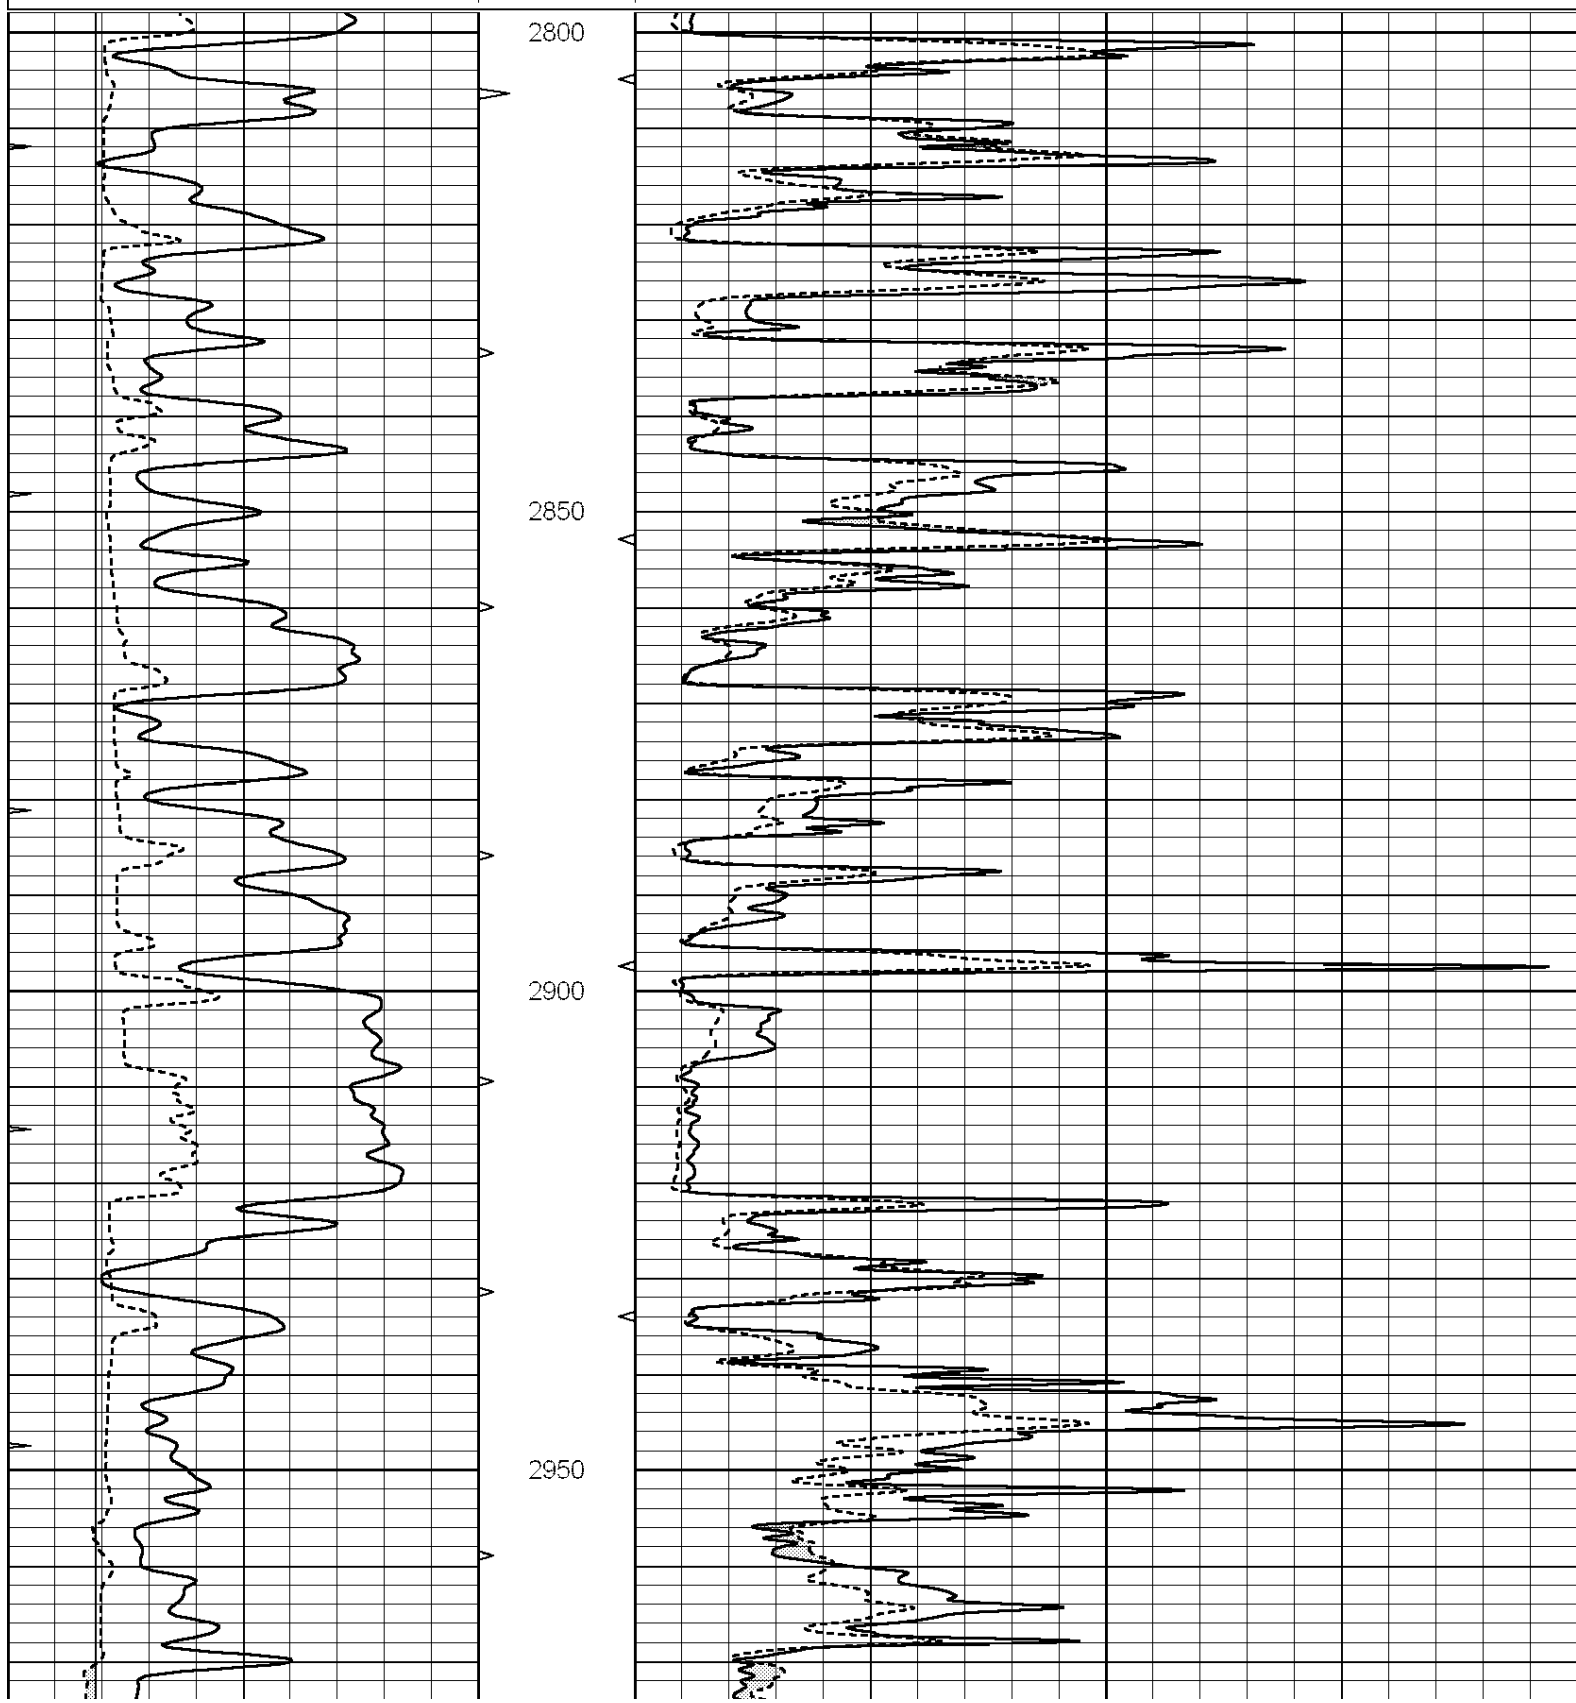

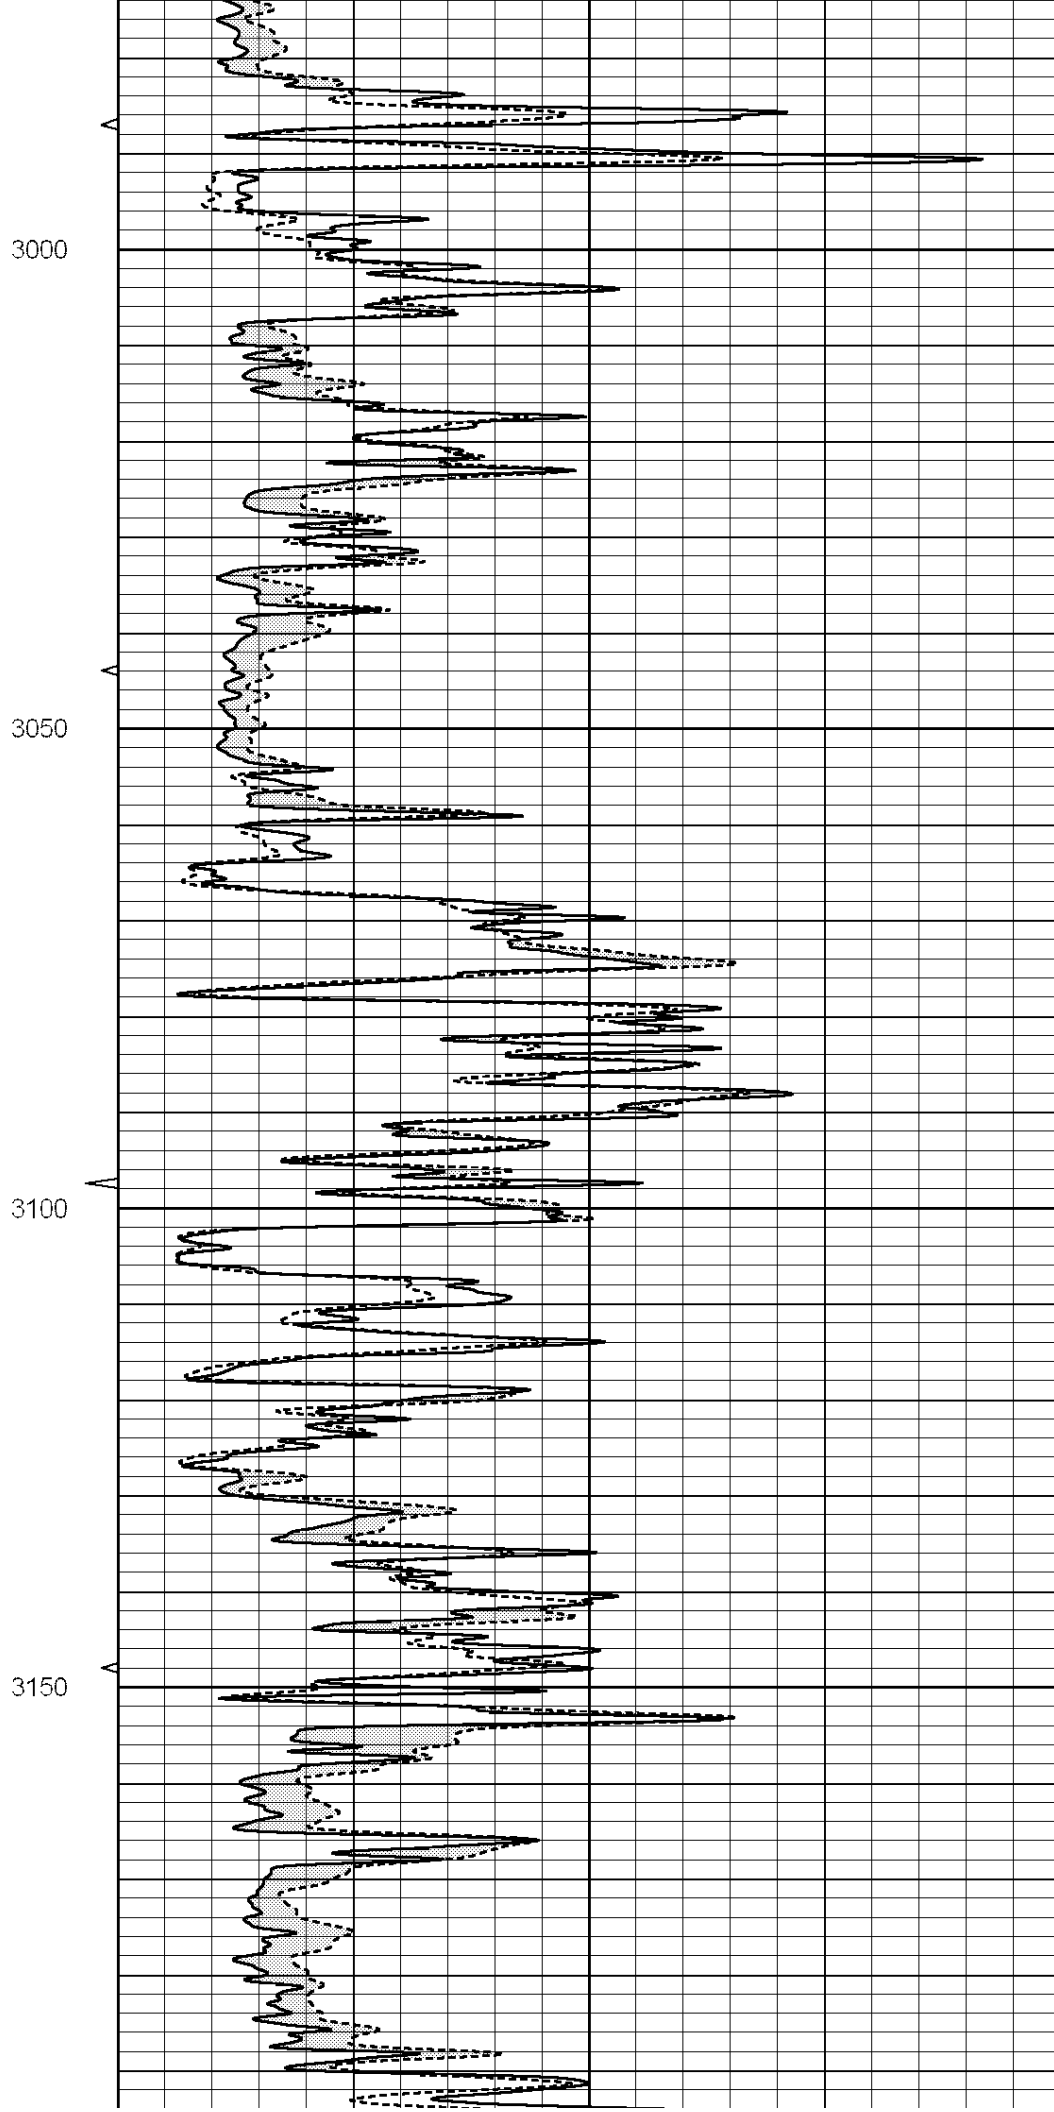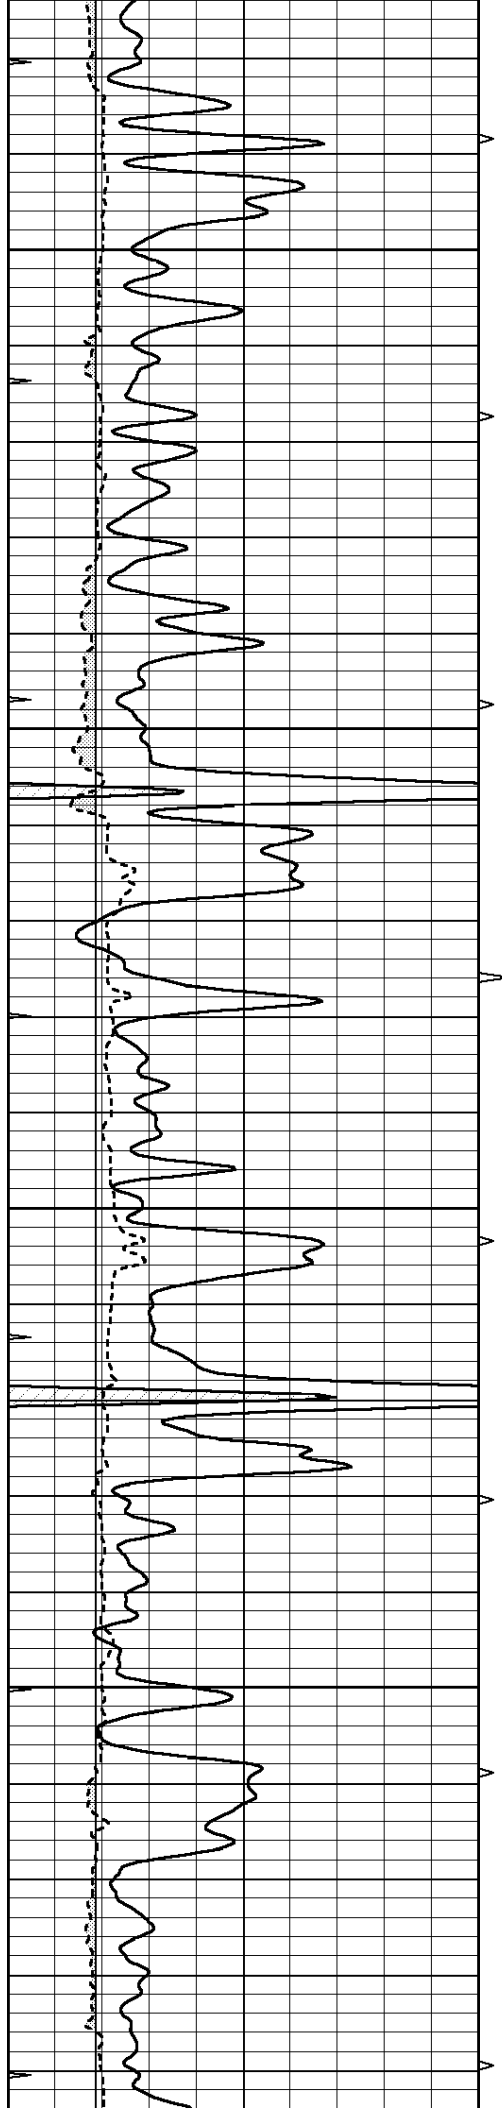

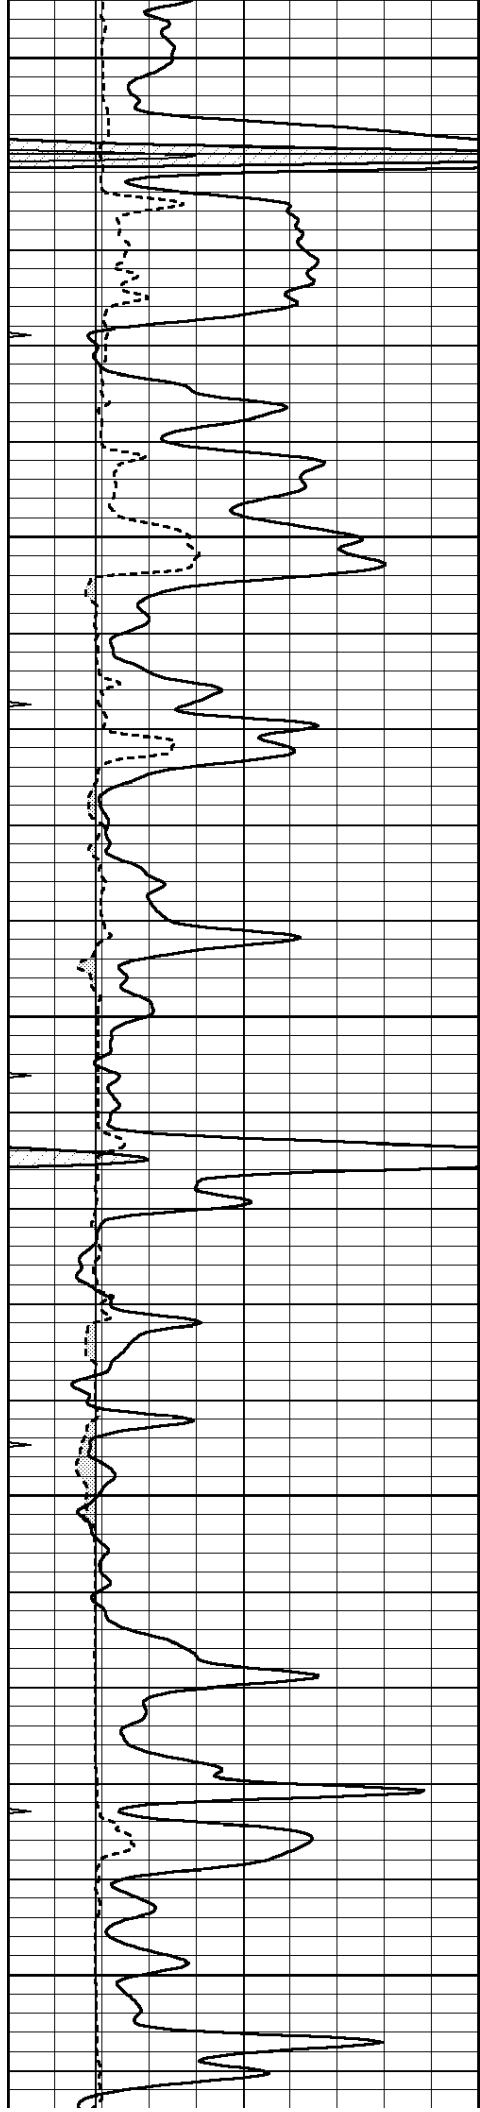


3200


3250

3300

3350

3400

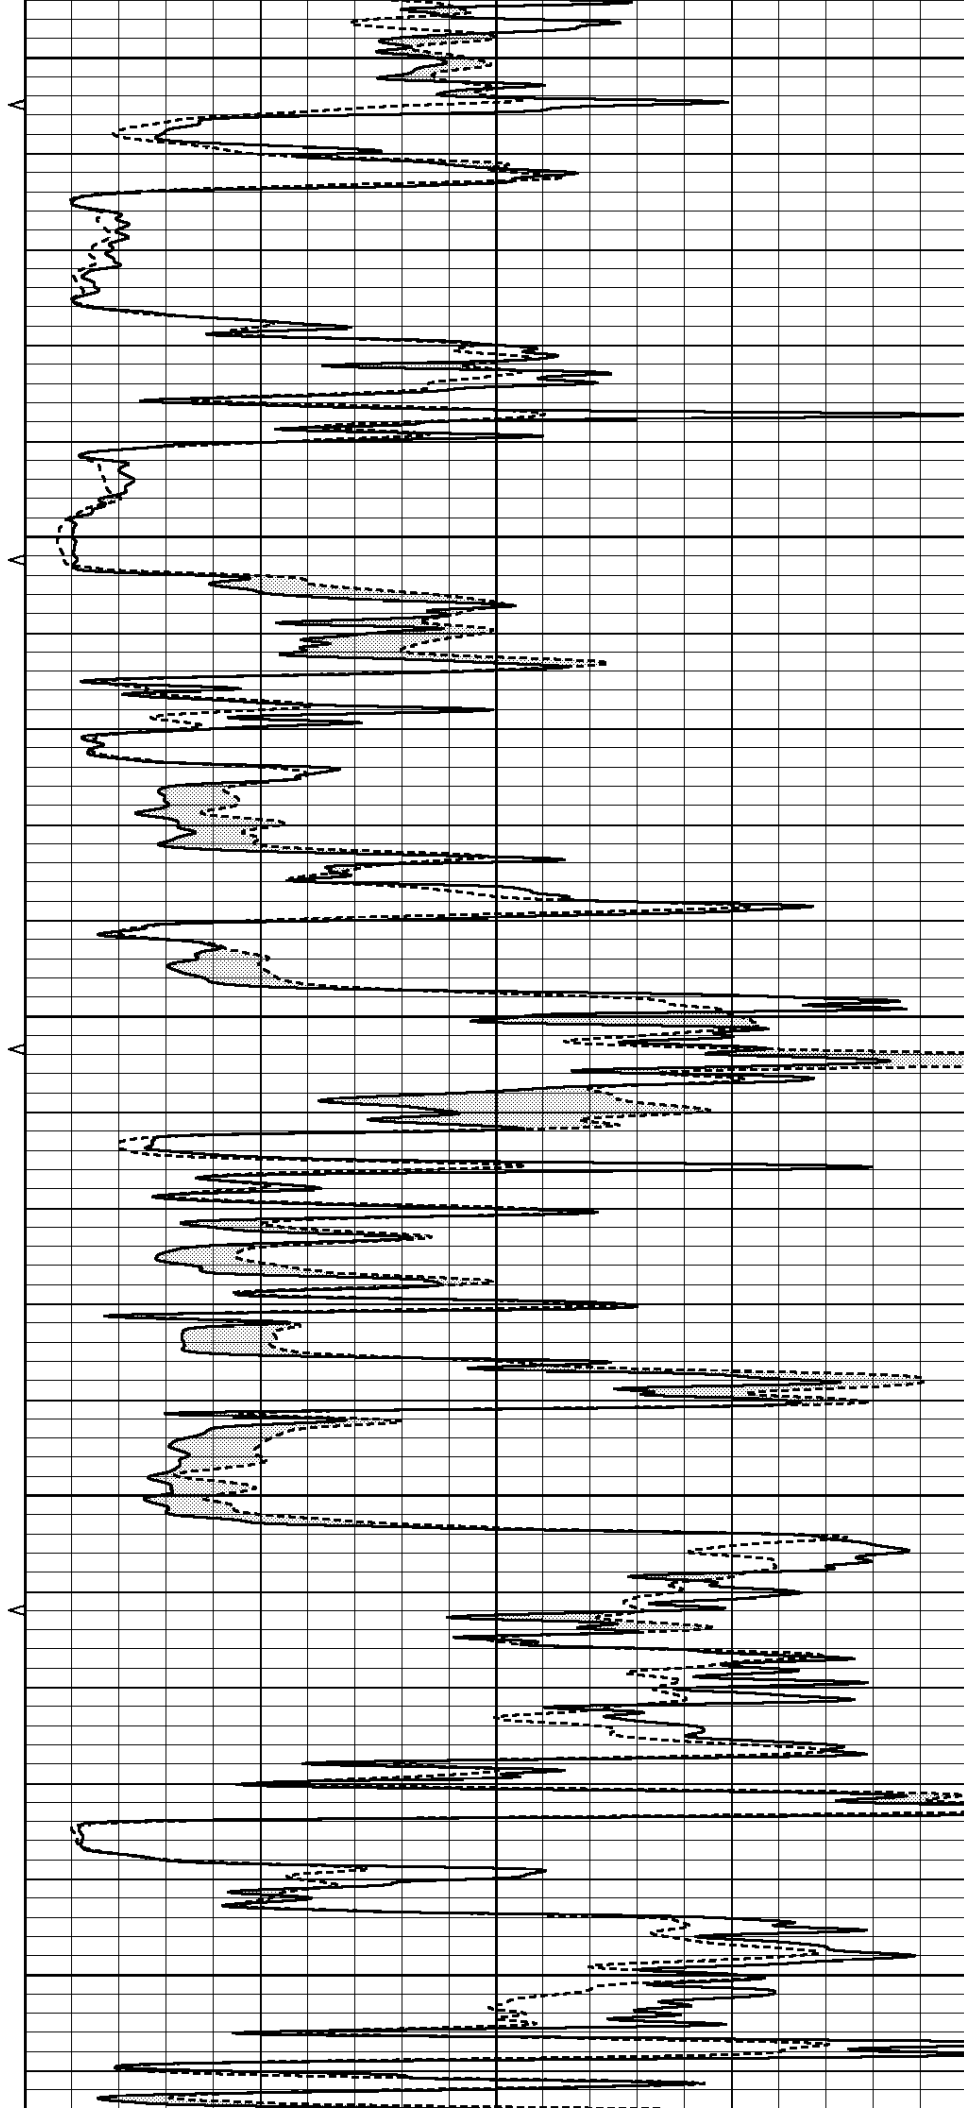

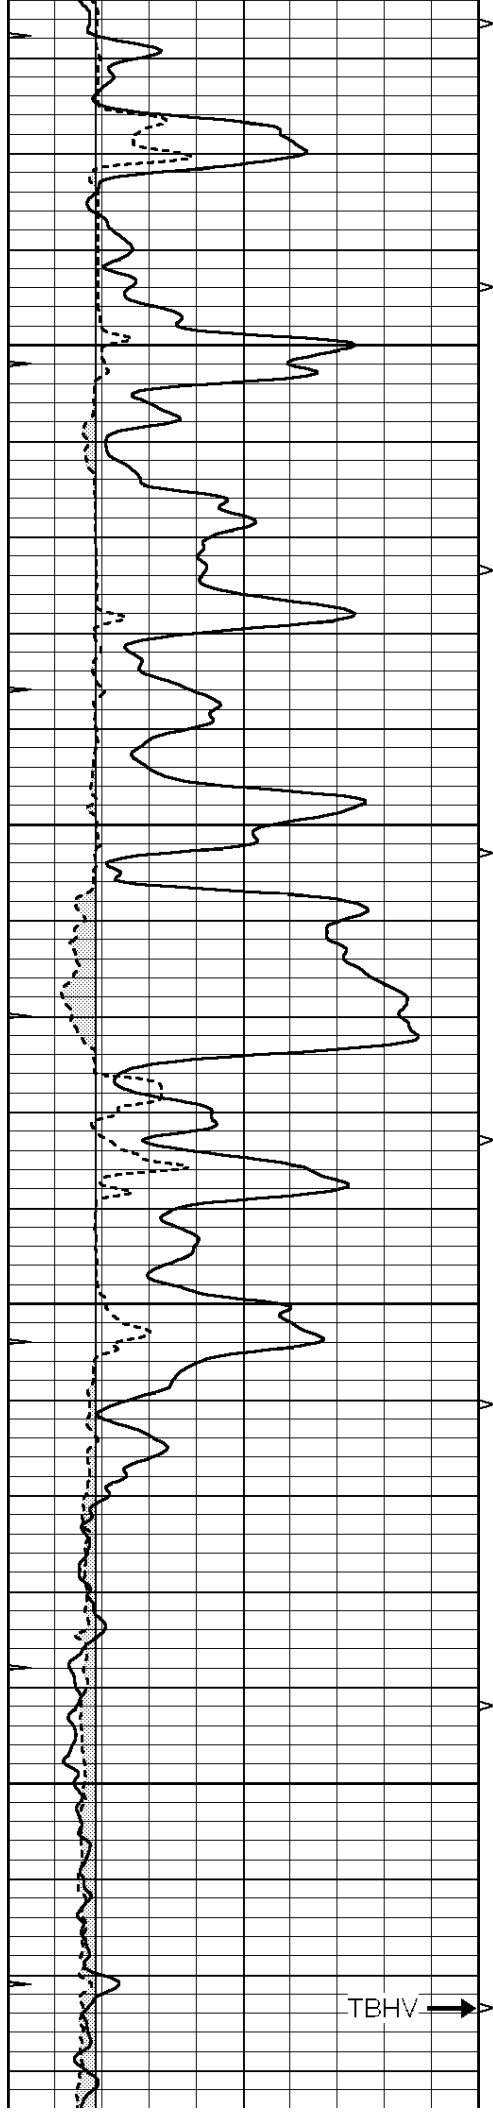


3450



3500

3550

3600

↑
5.5" ABHV

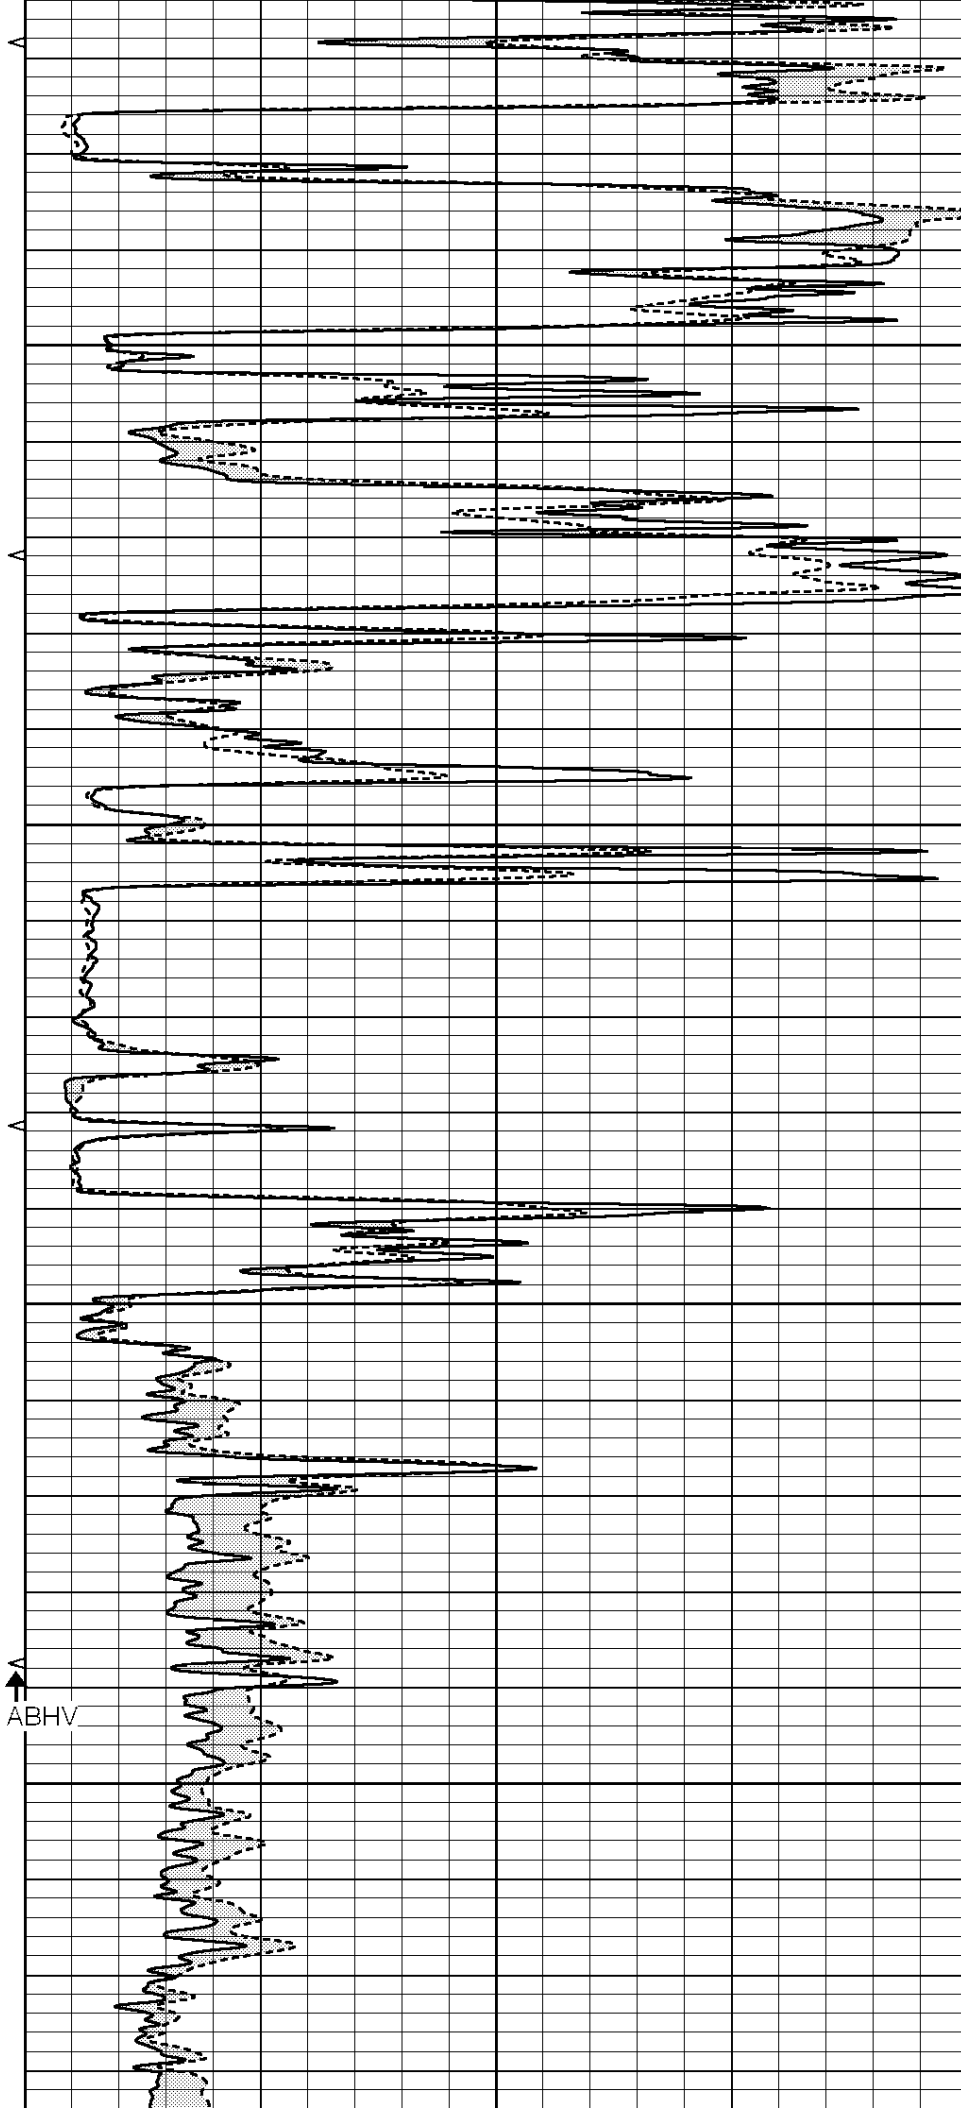


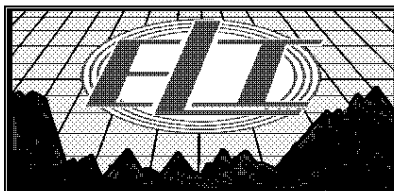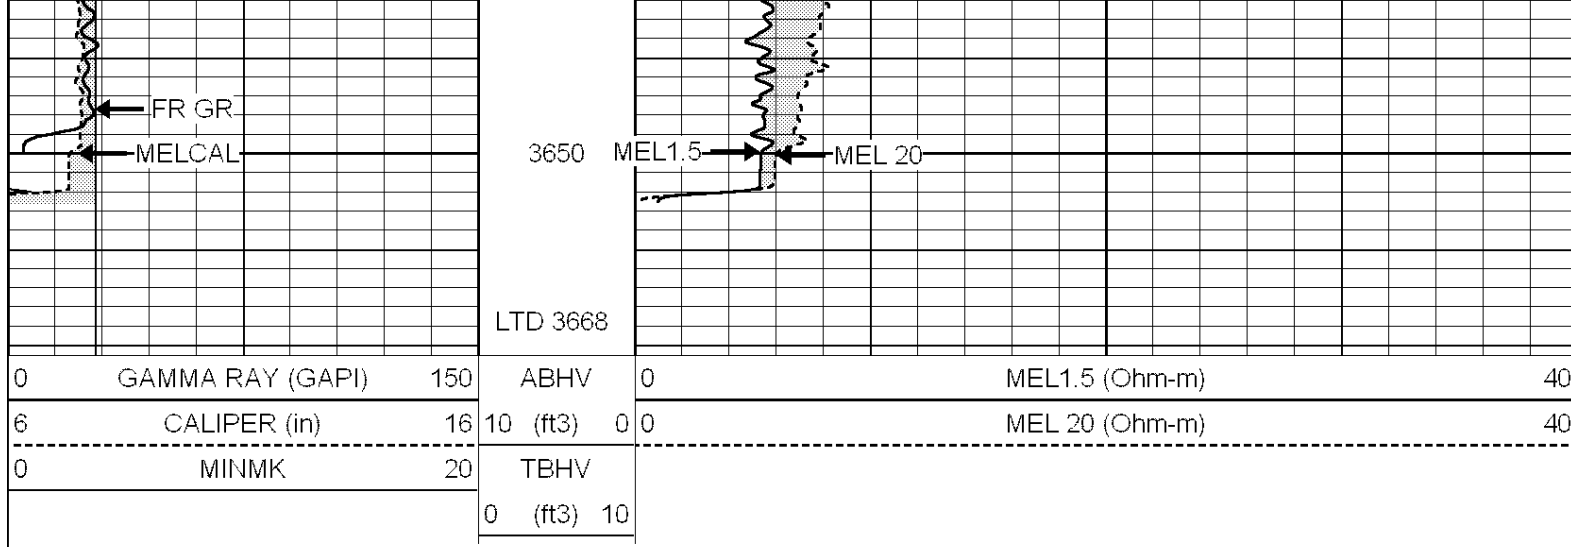


REPEAT SECTION

Database File: 2489ddn.db
 Dataset Pathname: pass5.1
 Presentation Format: micro
 Dataset Creation: Thu May 03 21:18:21 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

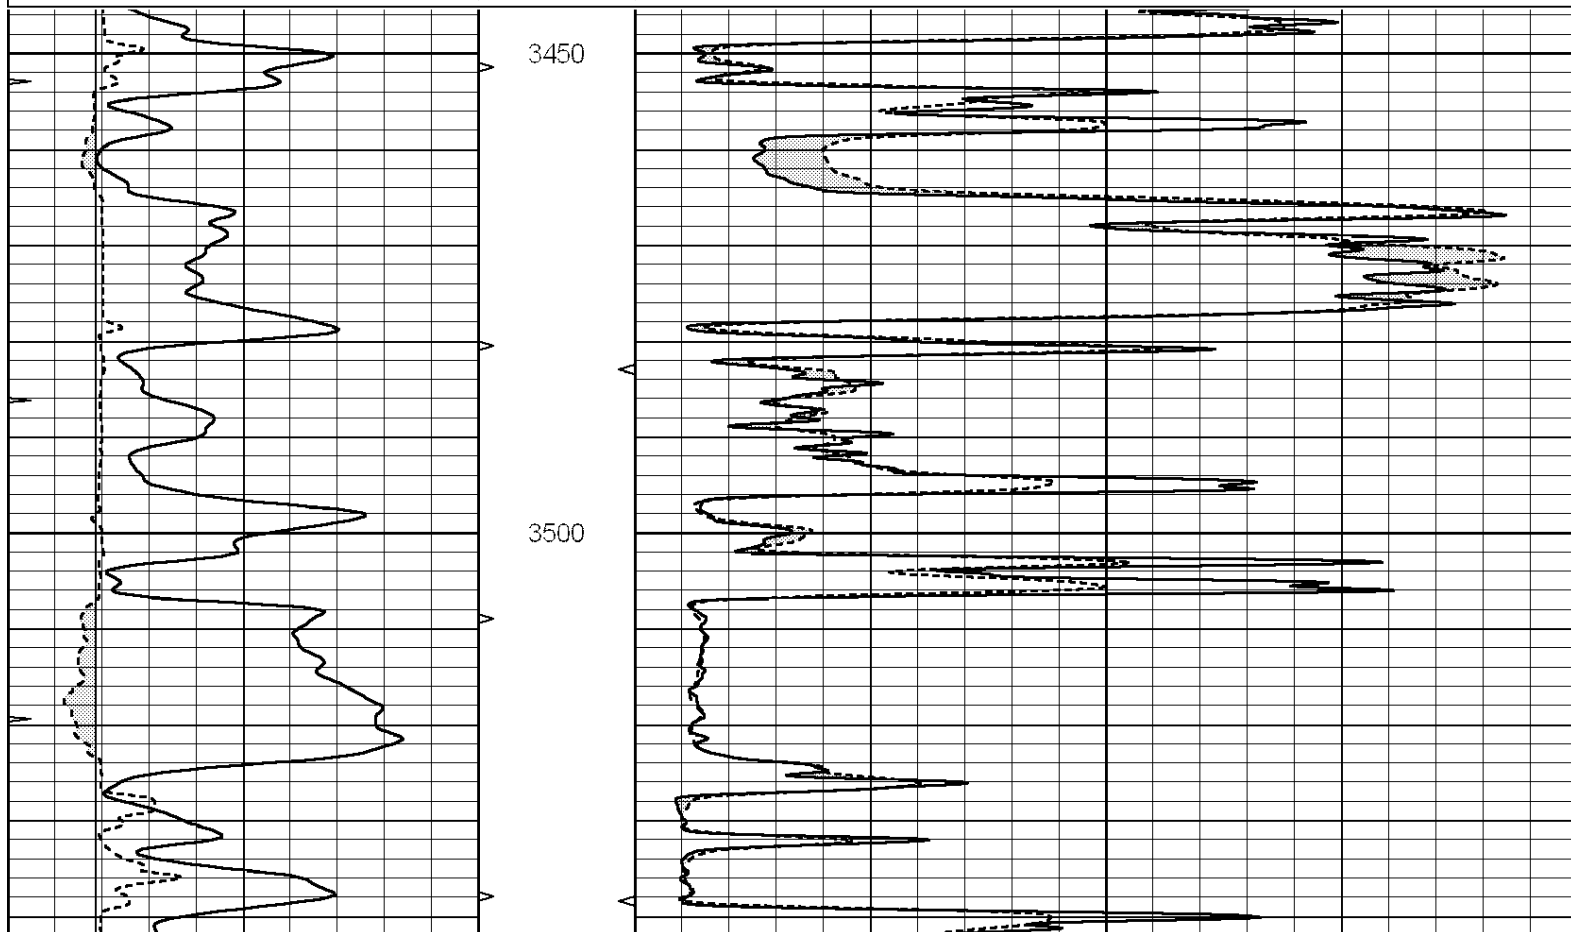

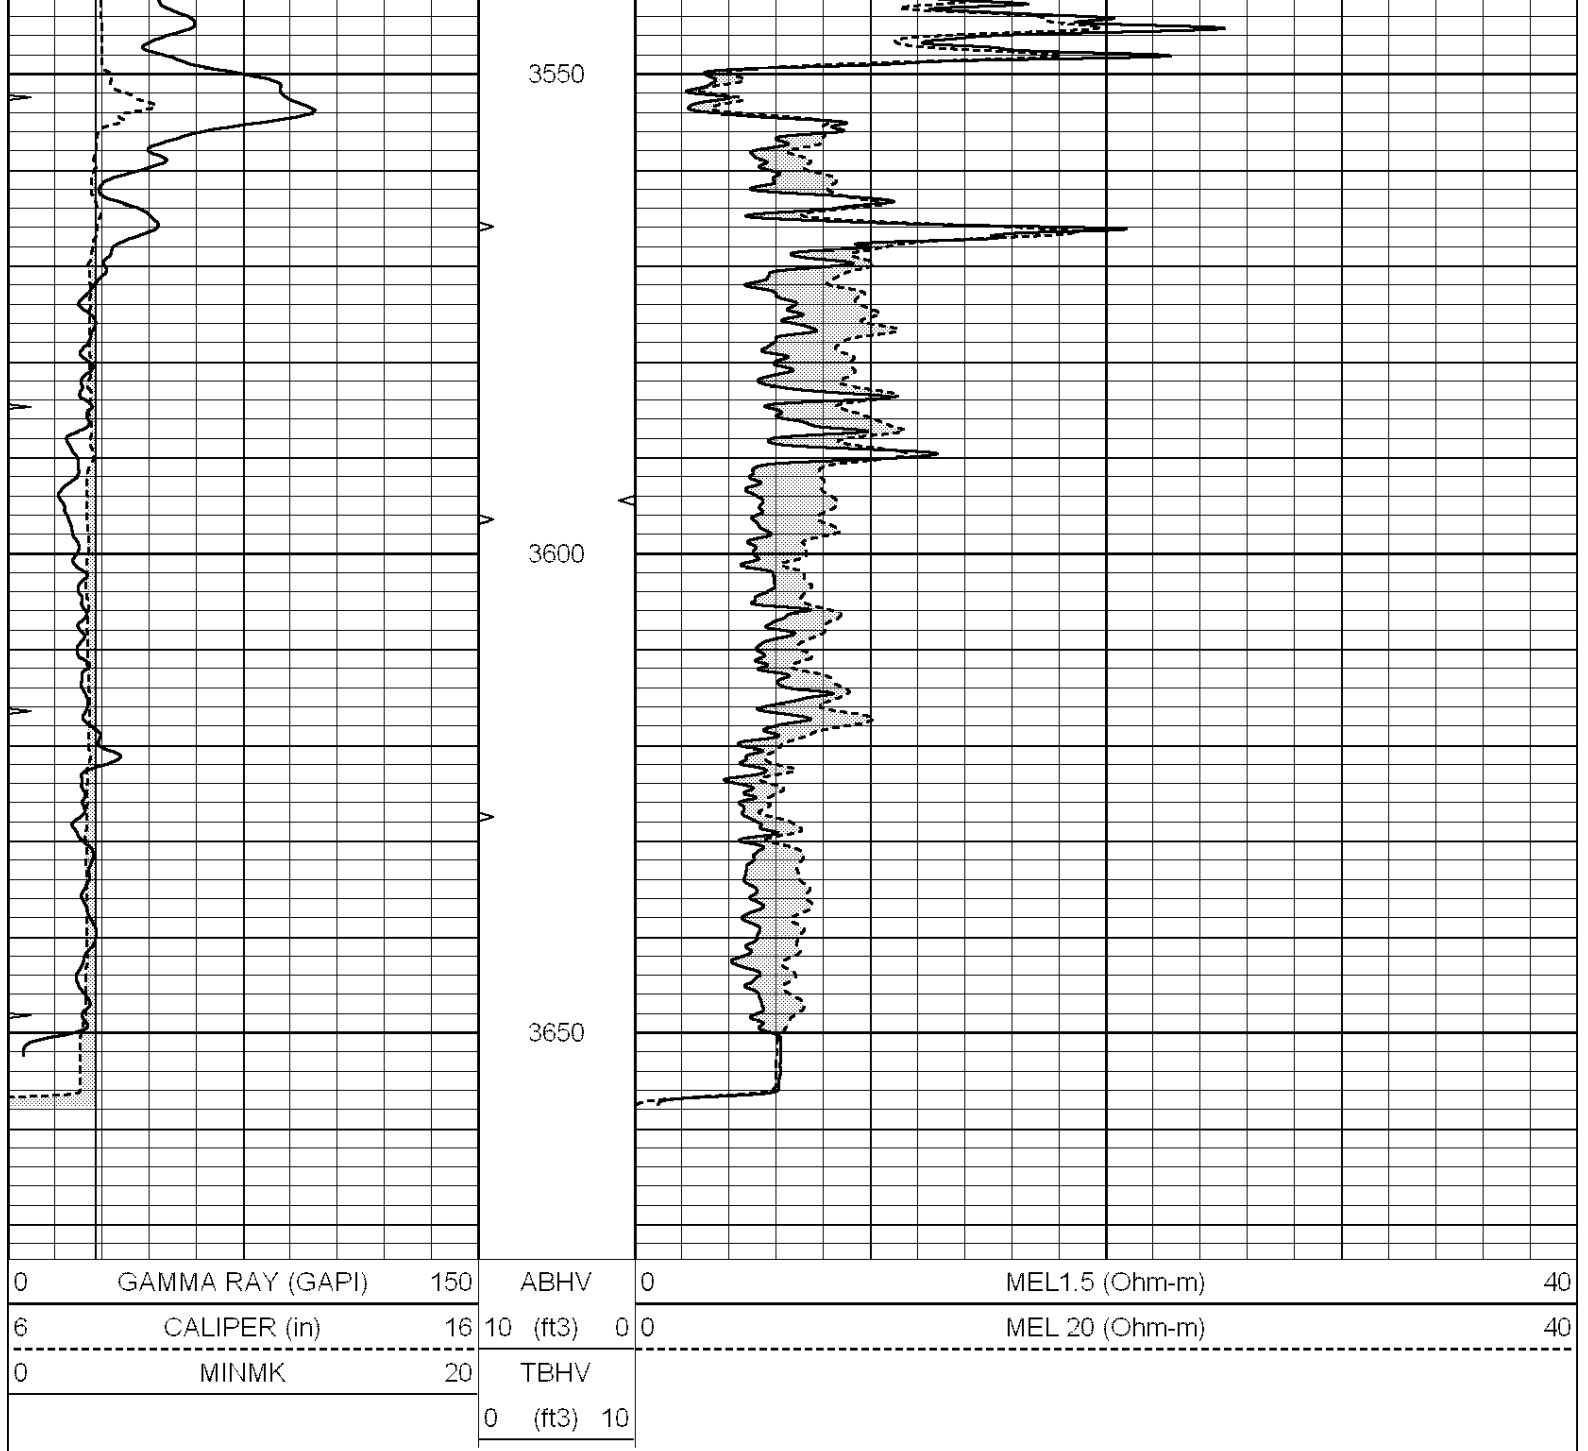

Calibration Report			
Database File:	2489ddn.db		
Dataset Pathname:	pass6.2		
Dataset Creation:	Thu May 03 21:50:22 2018 by Calc SOC 120430		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Wed Apr 04 00:59:58 2018		
Caliper Calibration:	Gain=3.843	Offset=2.627	
	Low Cal	High Cal	
References	8.200	18.000	
Readings	1.450	4.000	
1.5" Calibration:	Gain=25.000	Offset=1.000	
	Low Cal	High Cal	

References	Low Cal 0.000	High Cal 20.000
Readings	0.001	1.240
2" Calibration:	Gain=46.000	Offset=0.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.001	1.076
Gamma Ray Calibration Report		
Serial Number:	110959	
Tool Model:	OPEN_GR	
Performed:	Thu May 03 21:08:24 2018	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2500	GAPI/cps