

MICRO LOG


Company	C G OIL, INC.	Company	C G OIL, INC.
Well	WALKER #2	Well	WALKER #2
Field	AIR BASE	Field	AIR BASE
County	ELLIS	County	ELLIS
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-051-26881-0000 1750' FNL & 1980' FEL S/2 - N/2 - SW - NE	Other Services CDL/CNL DIL	
Permanent Datum	GROUND LEVEL	Elevation	1948
Log Measured From	KELLY BUSHING	Elevation	1954
Drilling Measured From	KELLY BUSHING	Elevation	1948
SEC 34 TWP 13S RGE 16W			
Date	6/7/17		
Run Number	TWO		
Depth Driller	3520		
Depth Logger	3520		
Bottom Logged Interval	3518		
Top Log Interval	2800		
Casing Driller	8 5/8"@1042'		
Casing Logger	1042		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 7,100 PPM	
Density / Viscosity	9.4/50		
pH / Fluid Loss	10.5/6.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.600@90F		
Rinf @ Meas. Temp	.450@90F		
Rmc @ Meas. Temp	.720@90F		
Source of Rinf / Rmc	MEASUREMENT		
Rim @ BHT	.482@112F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	12:00 P.M.		
Maximum Recorded Temperature	112F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ROGER FISHER	RON SCHMIDTBERGER	TERRY PIESKER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
WALKER, KS. & OLD 40, 3/4N., W. INTO @TANK BATTERY

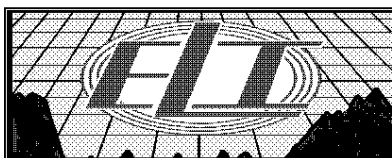


MAIN SECTION

Database File: 1576ddn.db
Dataset Pathname: pass6.3
Presentation Format: micro
Dataset Creation: Wed Jun 07 14:16:01 2017
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

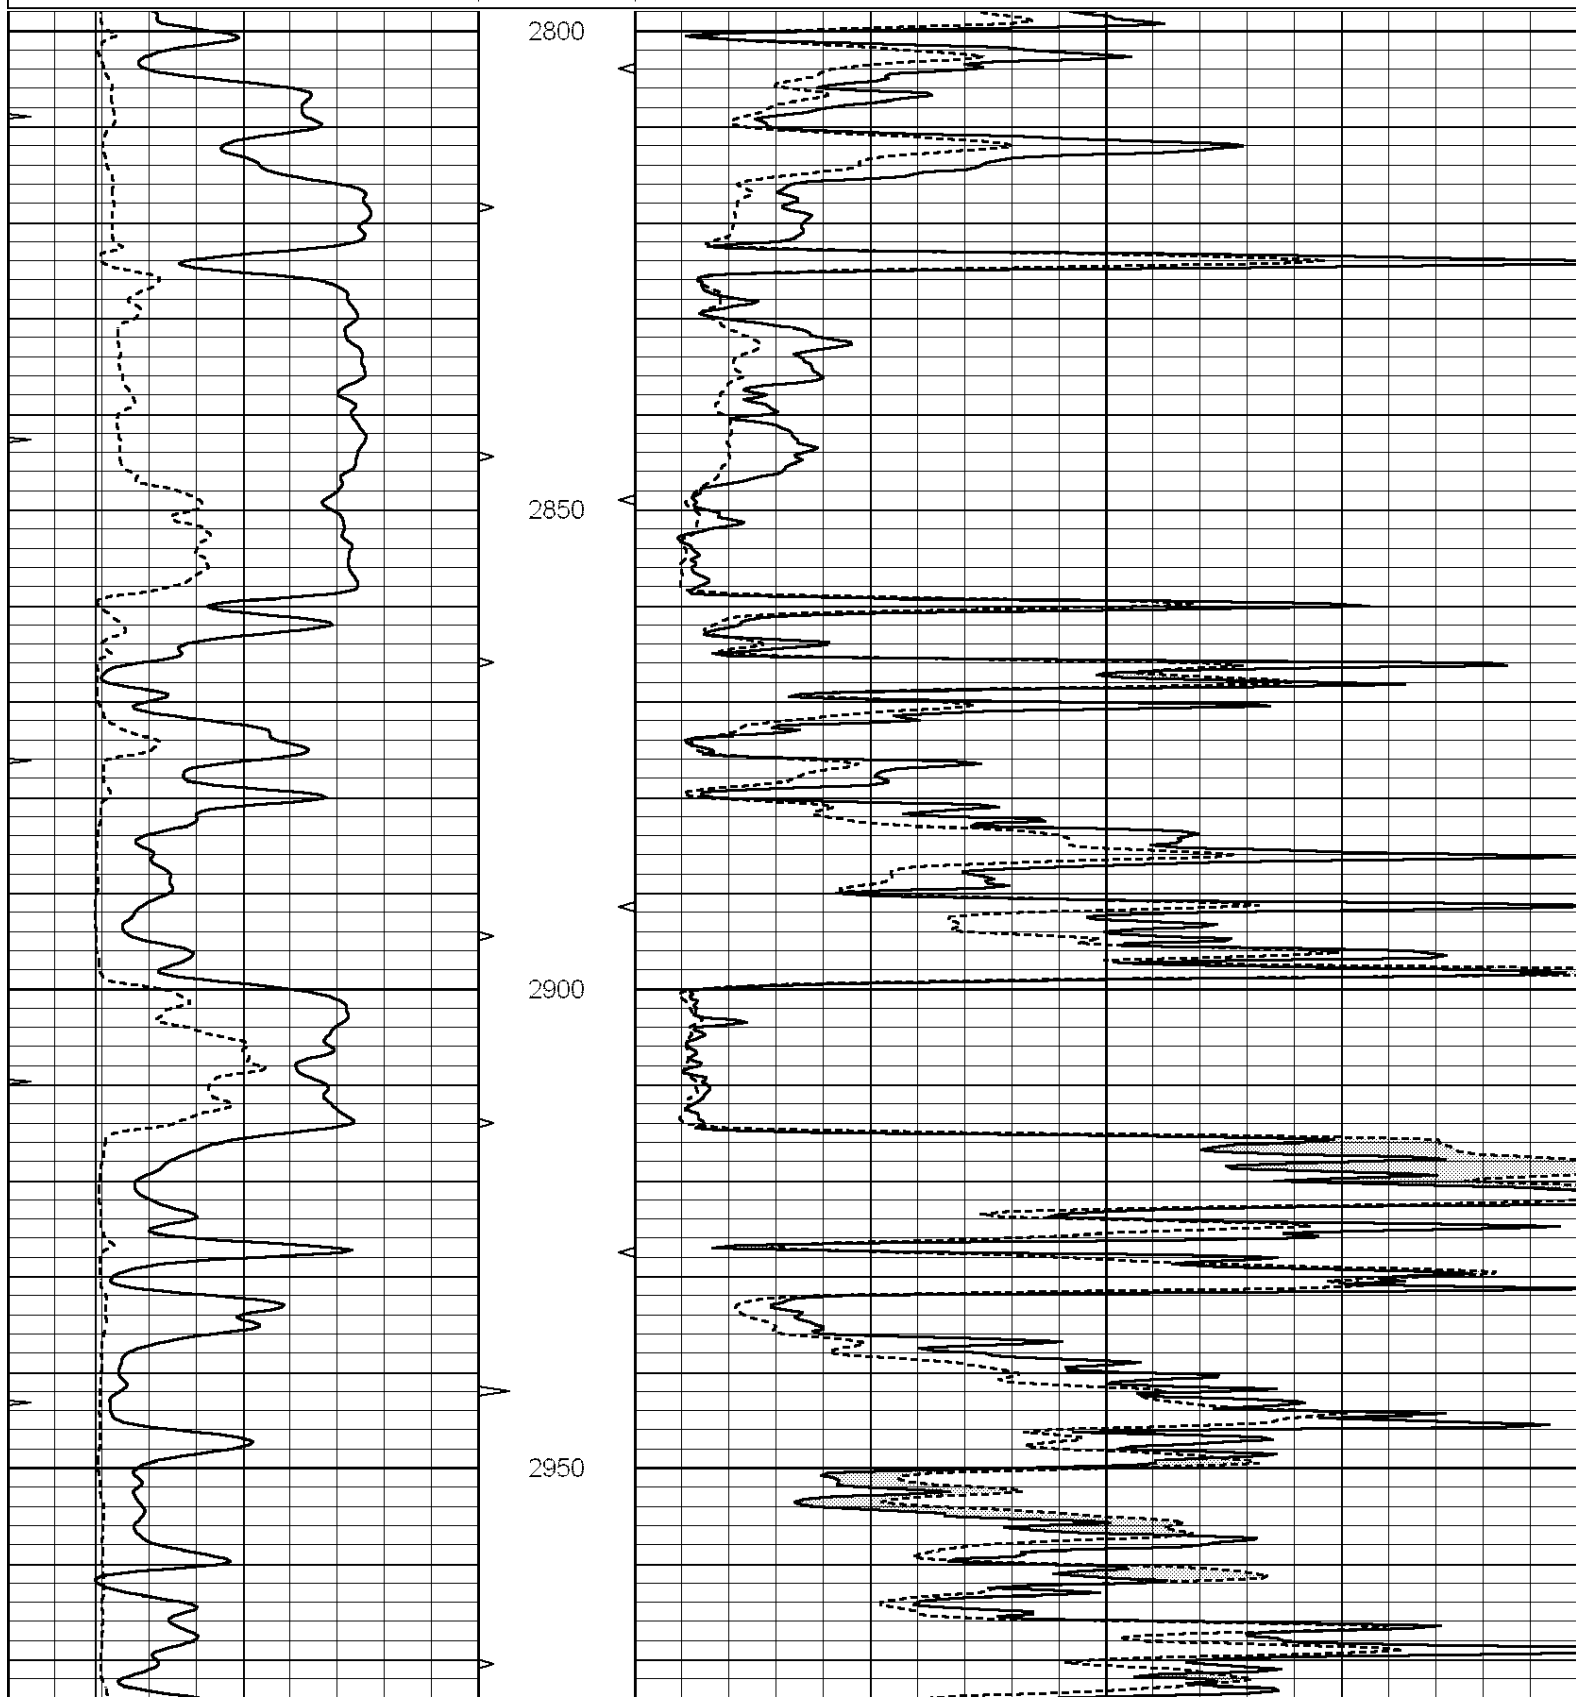

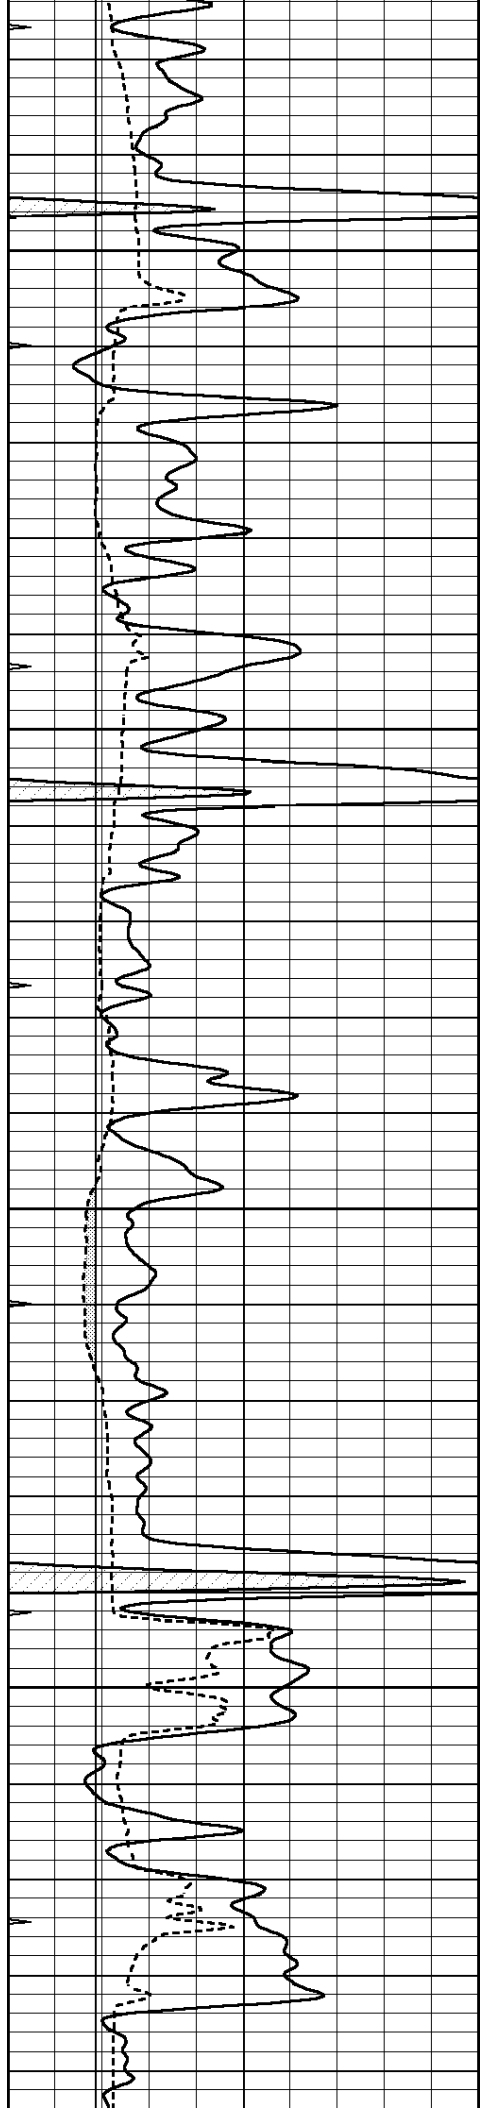




3000



3050

3100

3150


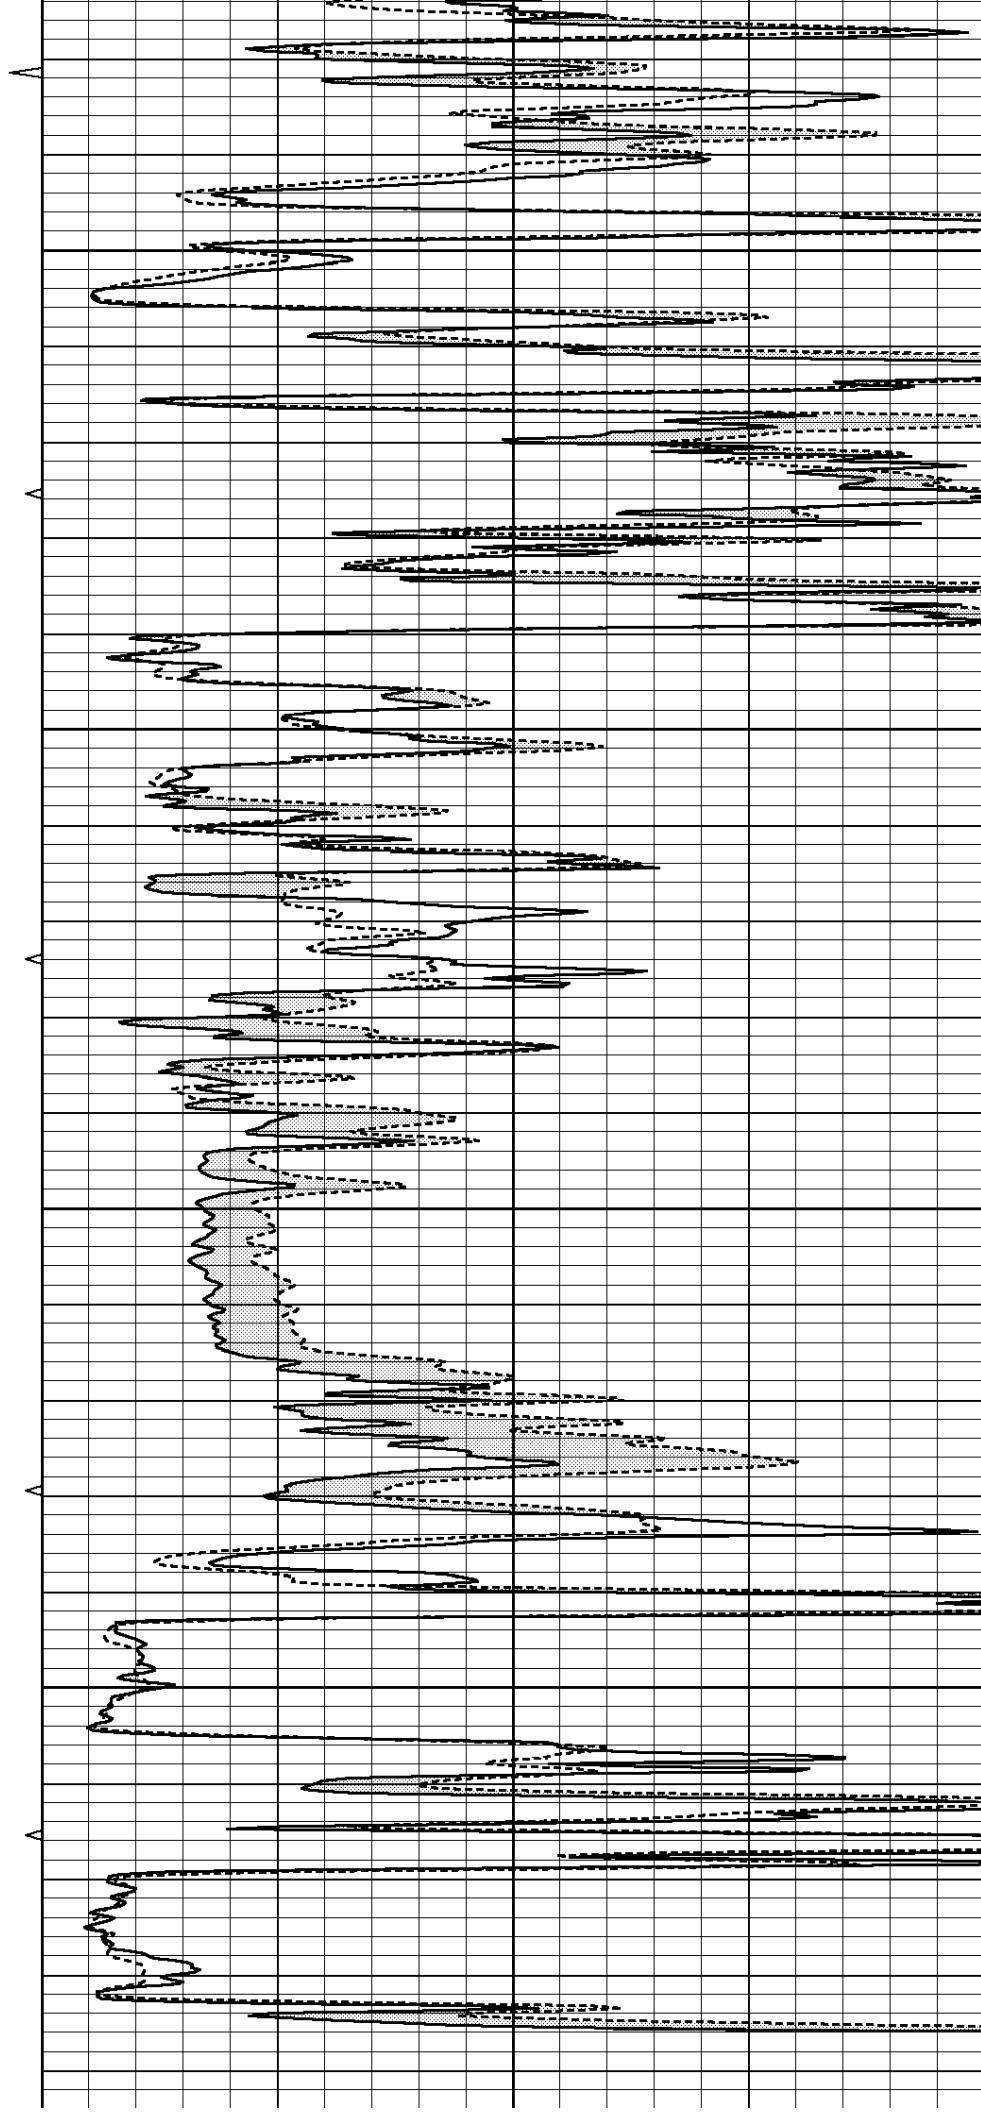


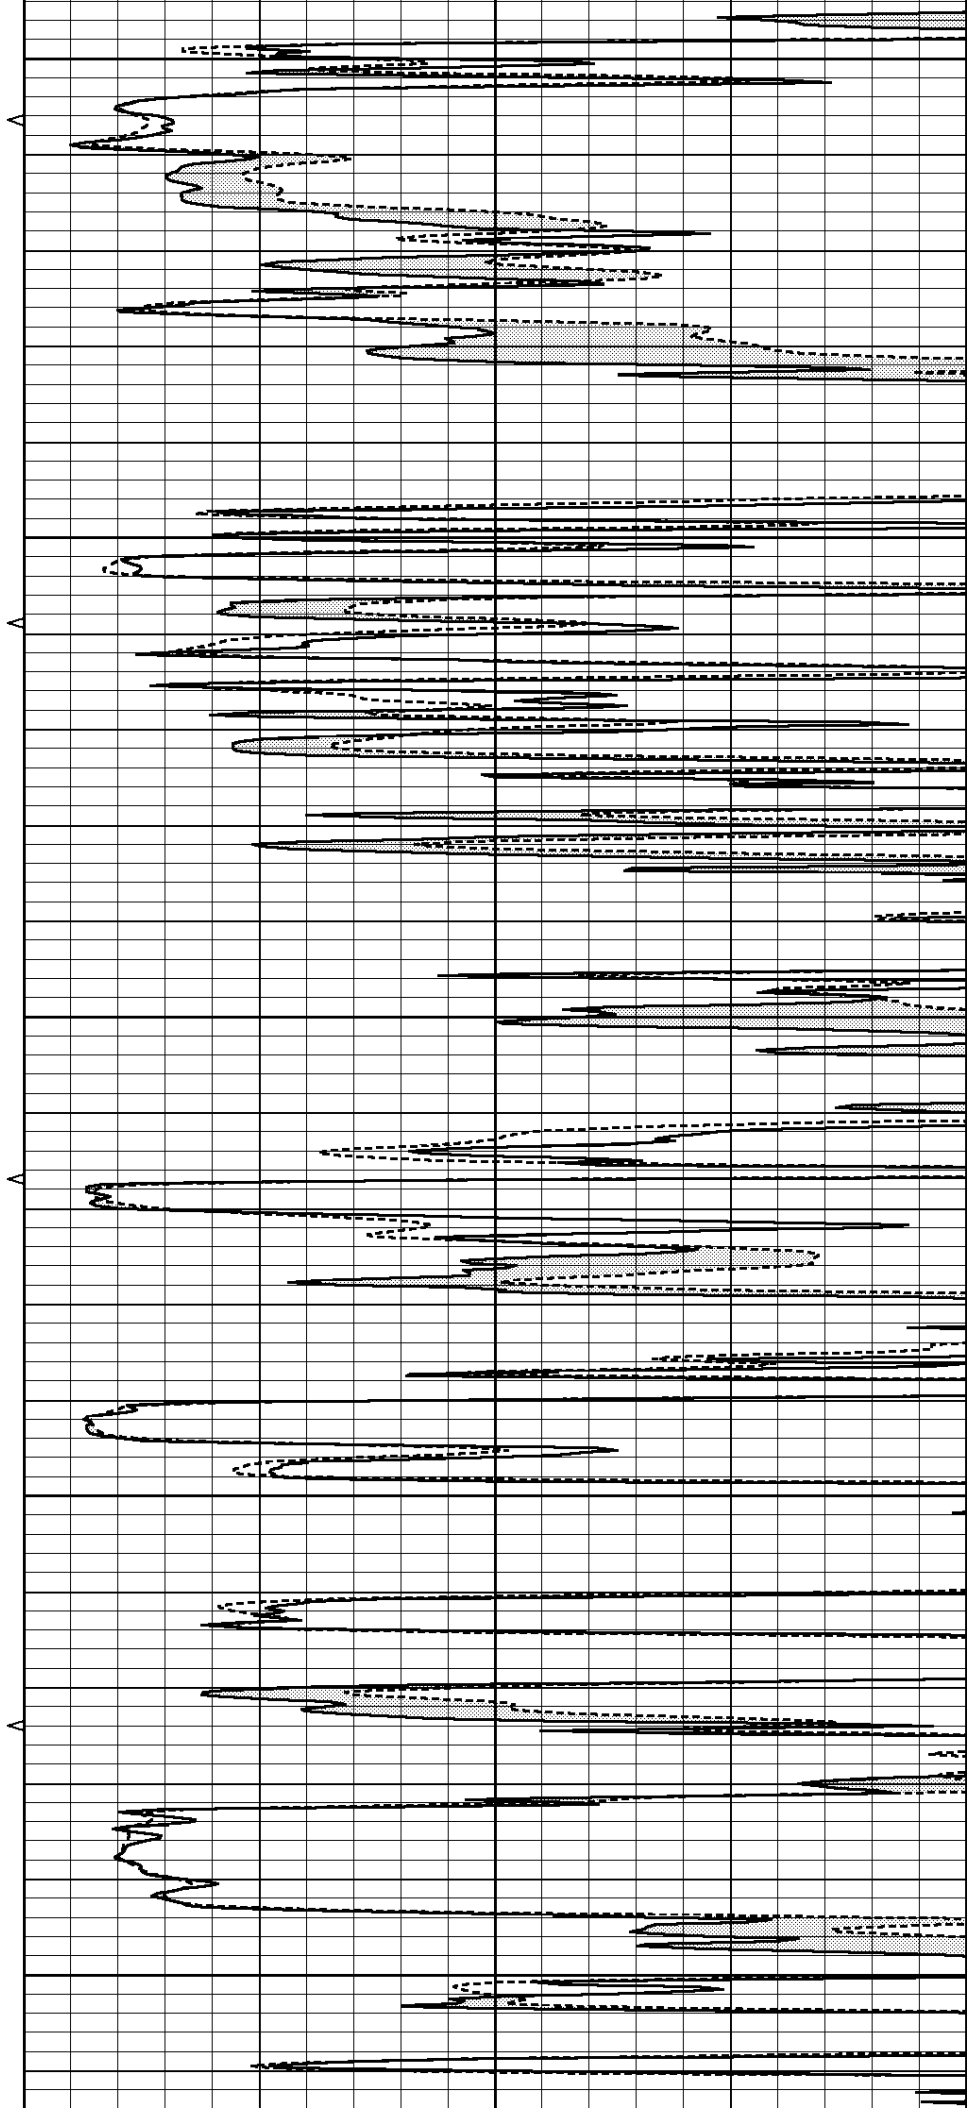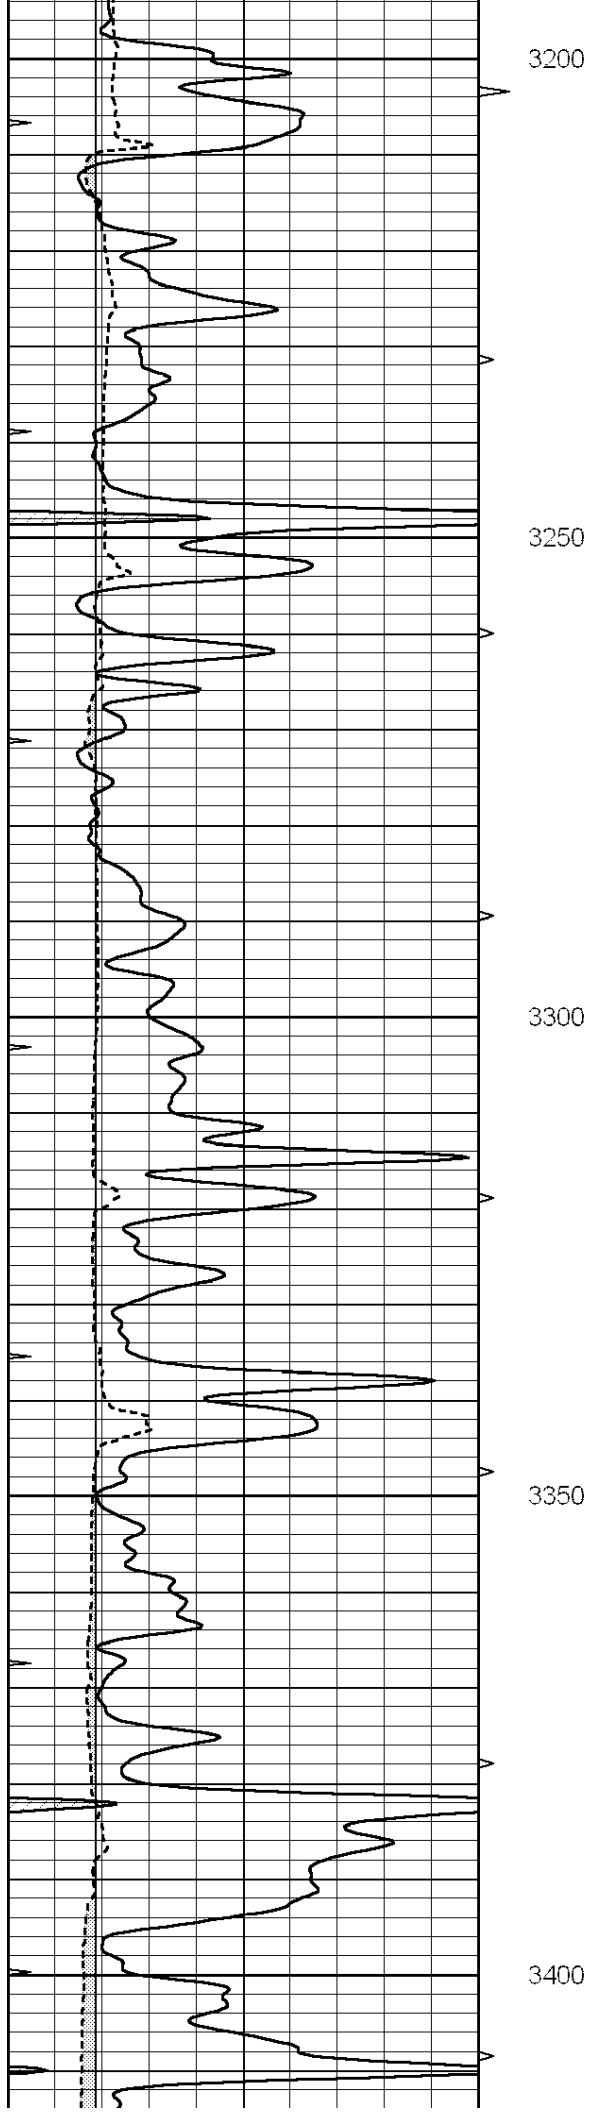

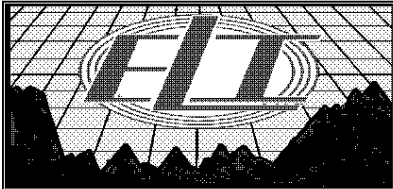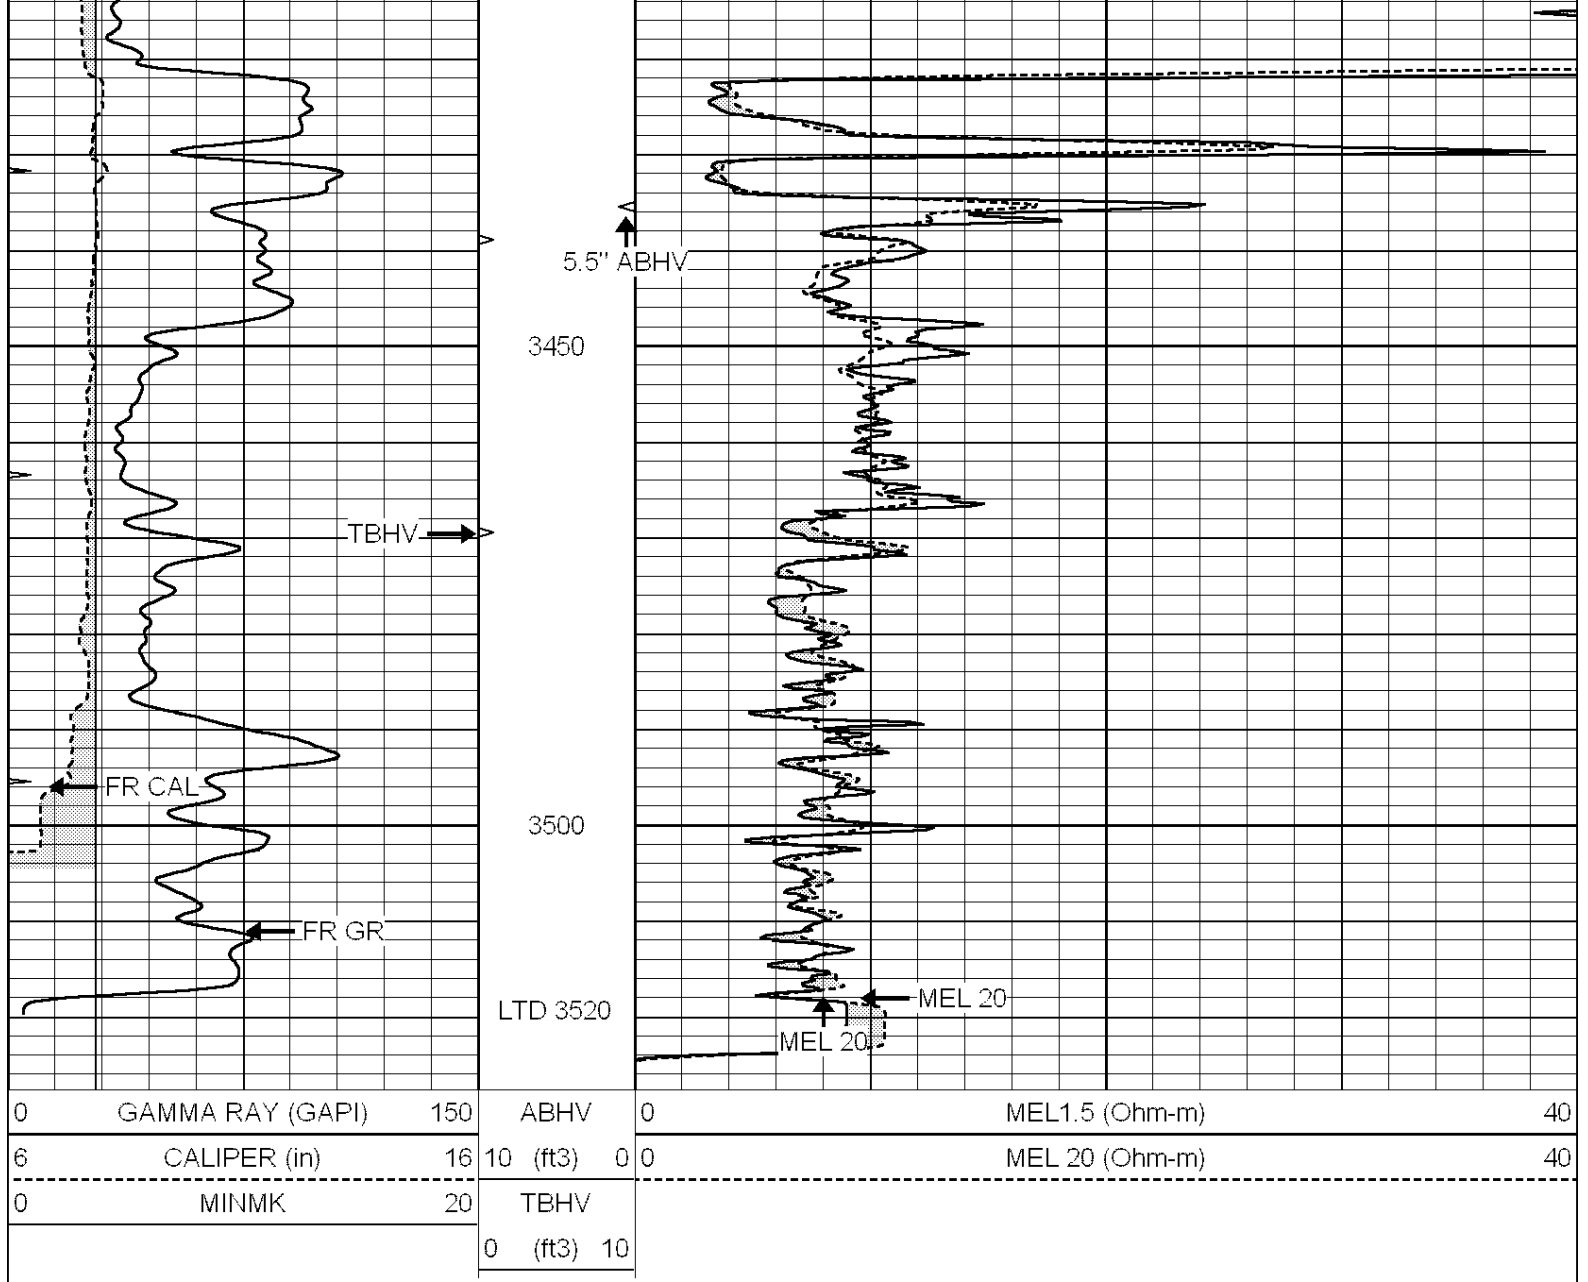


REPEAT SECTION

Database File: 1576ddn.db
 Dataset Pathname: pass5.2
 Presentation Format: micro
 Dataset Creation: Wed Jun 07 14:04:18 2017
 Charted by: Depth in Feet scaled 1:240

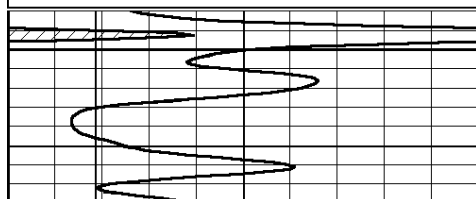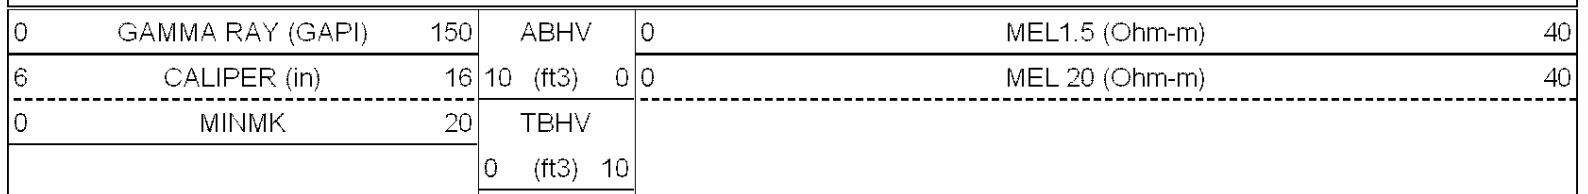

3250

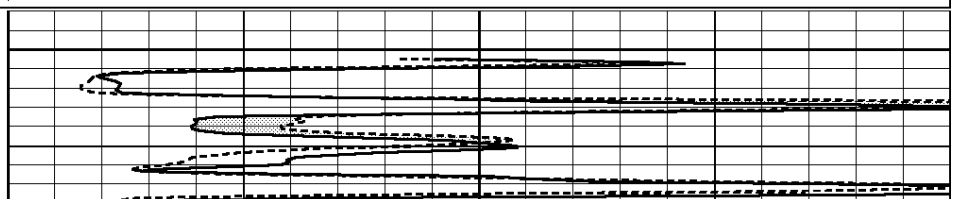





3300

3350

3400

3450

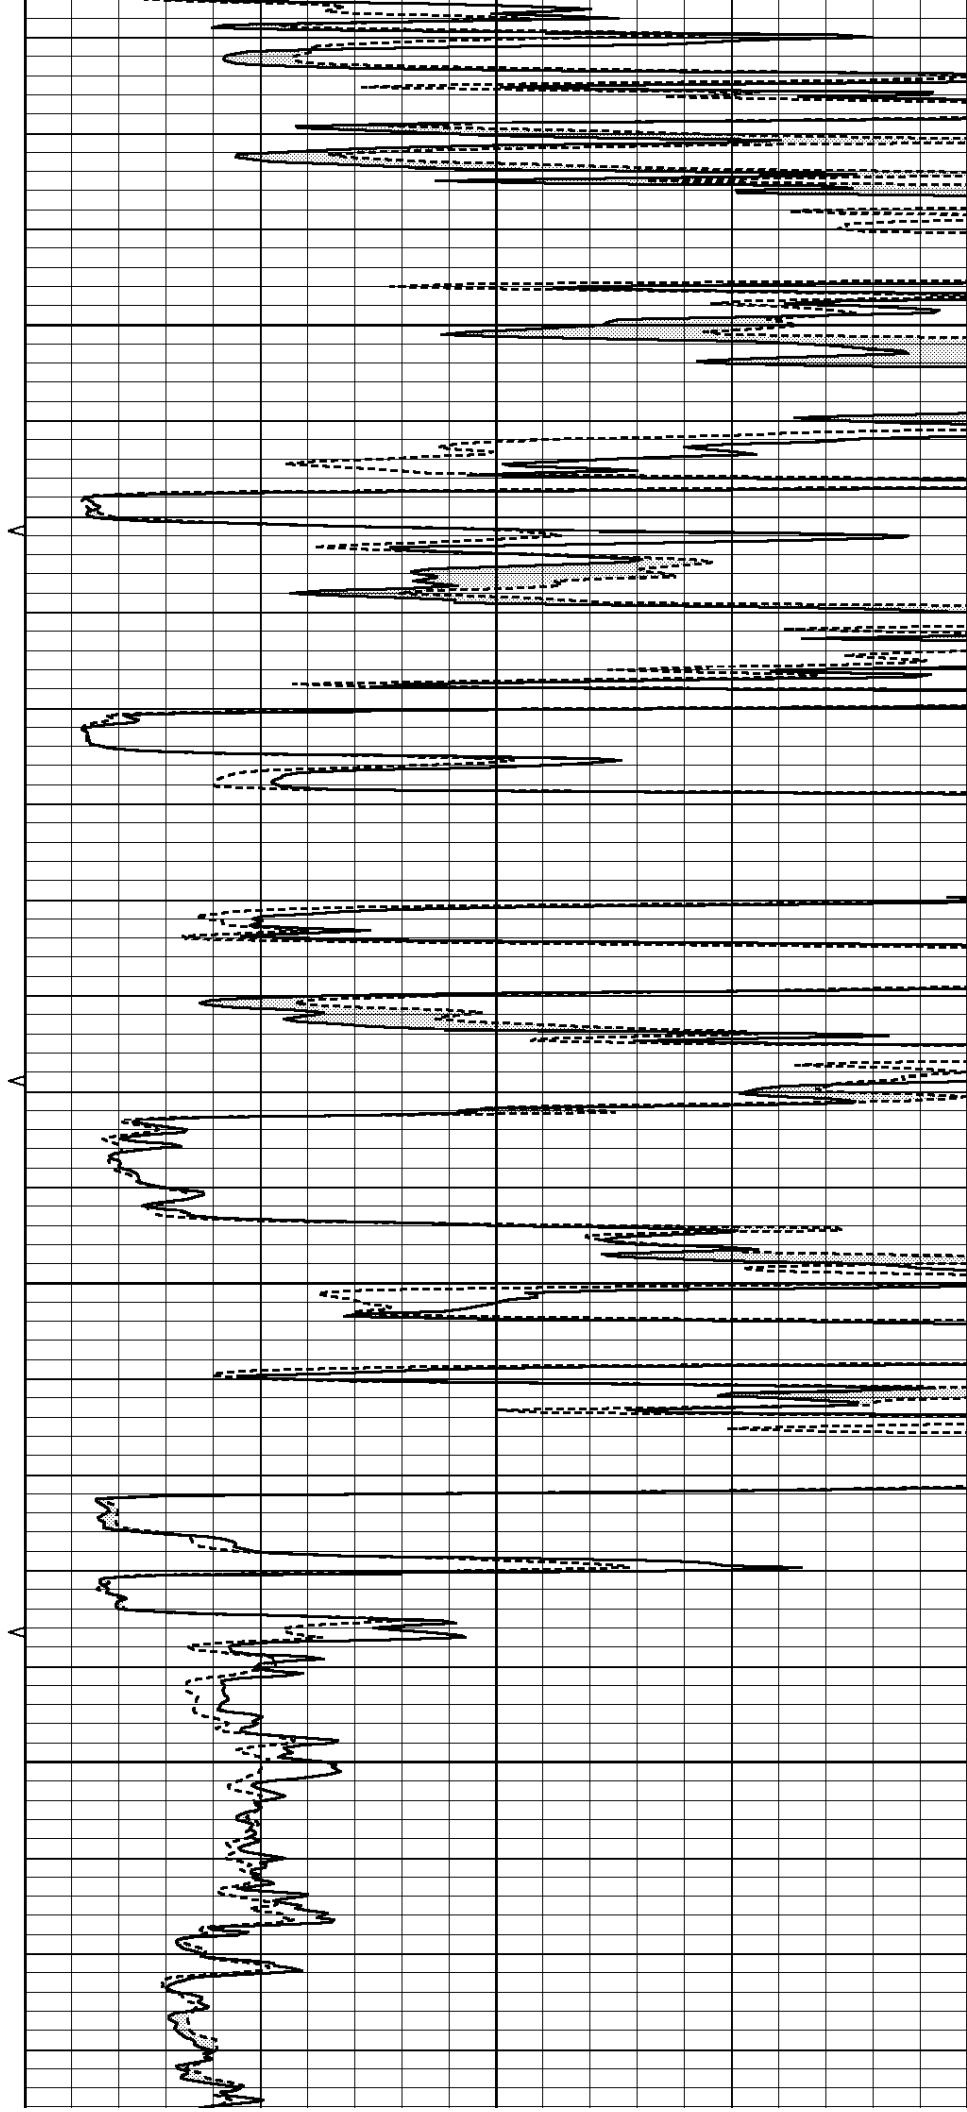

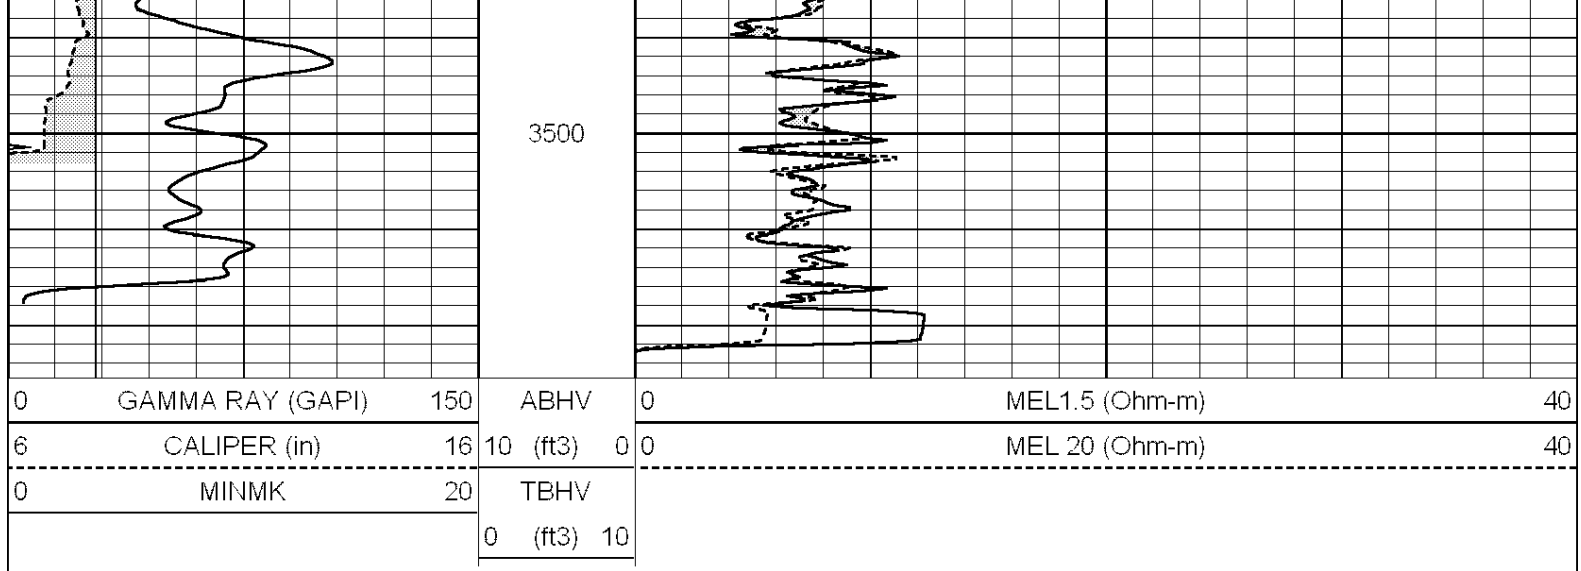

Calibration Report			
Database File:	1576ddn.db		
Dataset Pathname:	pass6.3		
Dataset Creation:	Wed Jun 07 14:16:01 2017		
MICRO Calibration Report			
Serial Number:	070912		
Tool Model:	ProbeN		
Performed:	Wed May 31 02:33:36 2017		
Caliper Calibration:	Gain=2.826	Offset=5.718	
	Low Cal	High Cal	
References	7.100	15.000	
Readings	0.489	3.285	
1.5" Calibration:	Gain=40.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.239	
2" Calibration:	Gain=52.000	Offset=-0.200	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.003	1.075	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Tue May 23 05:05:59 2017		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2000	GAPI/cps	