



COMPENSATED DENSITY/NEUTRON LOG

Company	RJM COMPANY	Company	RJM COMPANY
Well	K & C MILLER #1	Well	K & C MILLER #1
Field	UNKNOWN	Field	UNKNOWN
County	BARTON	County	BARTON
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-009-26225-00-00 NE/SE/NW/NE 980 FNL & 1560 FEL		Other Services DIL/MEL SONIC
Permanent Datum	SEC 10 TWP 19S RGE 12W	Elevation	
Log Measured From	GROUND LEVEL	Elevation	1823
Drilling Measured From	KELLY BUSHING 8' A.G.L. KELLY BUSHING	K.B. 1831 D.F. 1829 G.L. 1823	
Date	08/08/18		
Run Number	ONE		
Depth Driller	3488		
Depth Logger	3488		
Bottom Logged Interval	3464		
Top Log Interval	2600		
Casing Driller	8 5/8@ 292		
Casing Logger	292		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6000 PPM	
Density / Viscosity	9.1/48		
pH / Fluid Loss	9.5/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.80@70		
Rmt @ Meas. Temp	.60@70		
Rmc @ Meas. Temp	.96@70		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.50@111		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	111F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	WYATT URBAN		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
BARTON COLLEGE BLACKTOP AND 156 NORTH TO 40 RD.
1.5 EAST, SOUTH INTO.

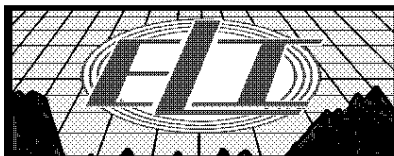




MAIN PASS


Database File: 2700pe.db
Dataset Pathname: pass3.1
Presentation Format: den_neu
Dataset Creation: Wed Aug 08 09:04:00 2018 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240



0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25	CORRECTION (g/cc) 0.25
			0 (ft3)	10		

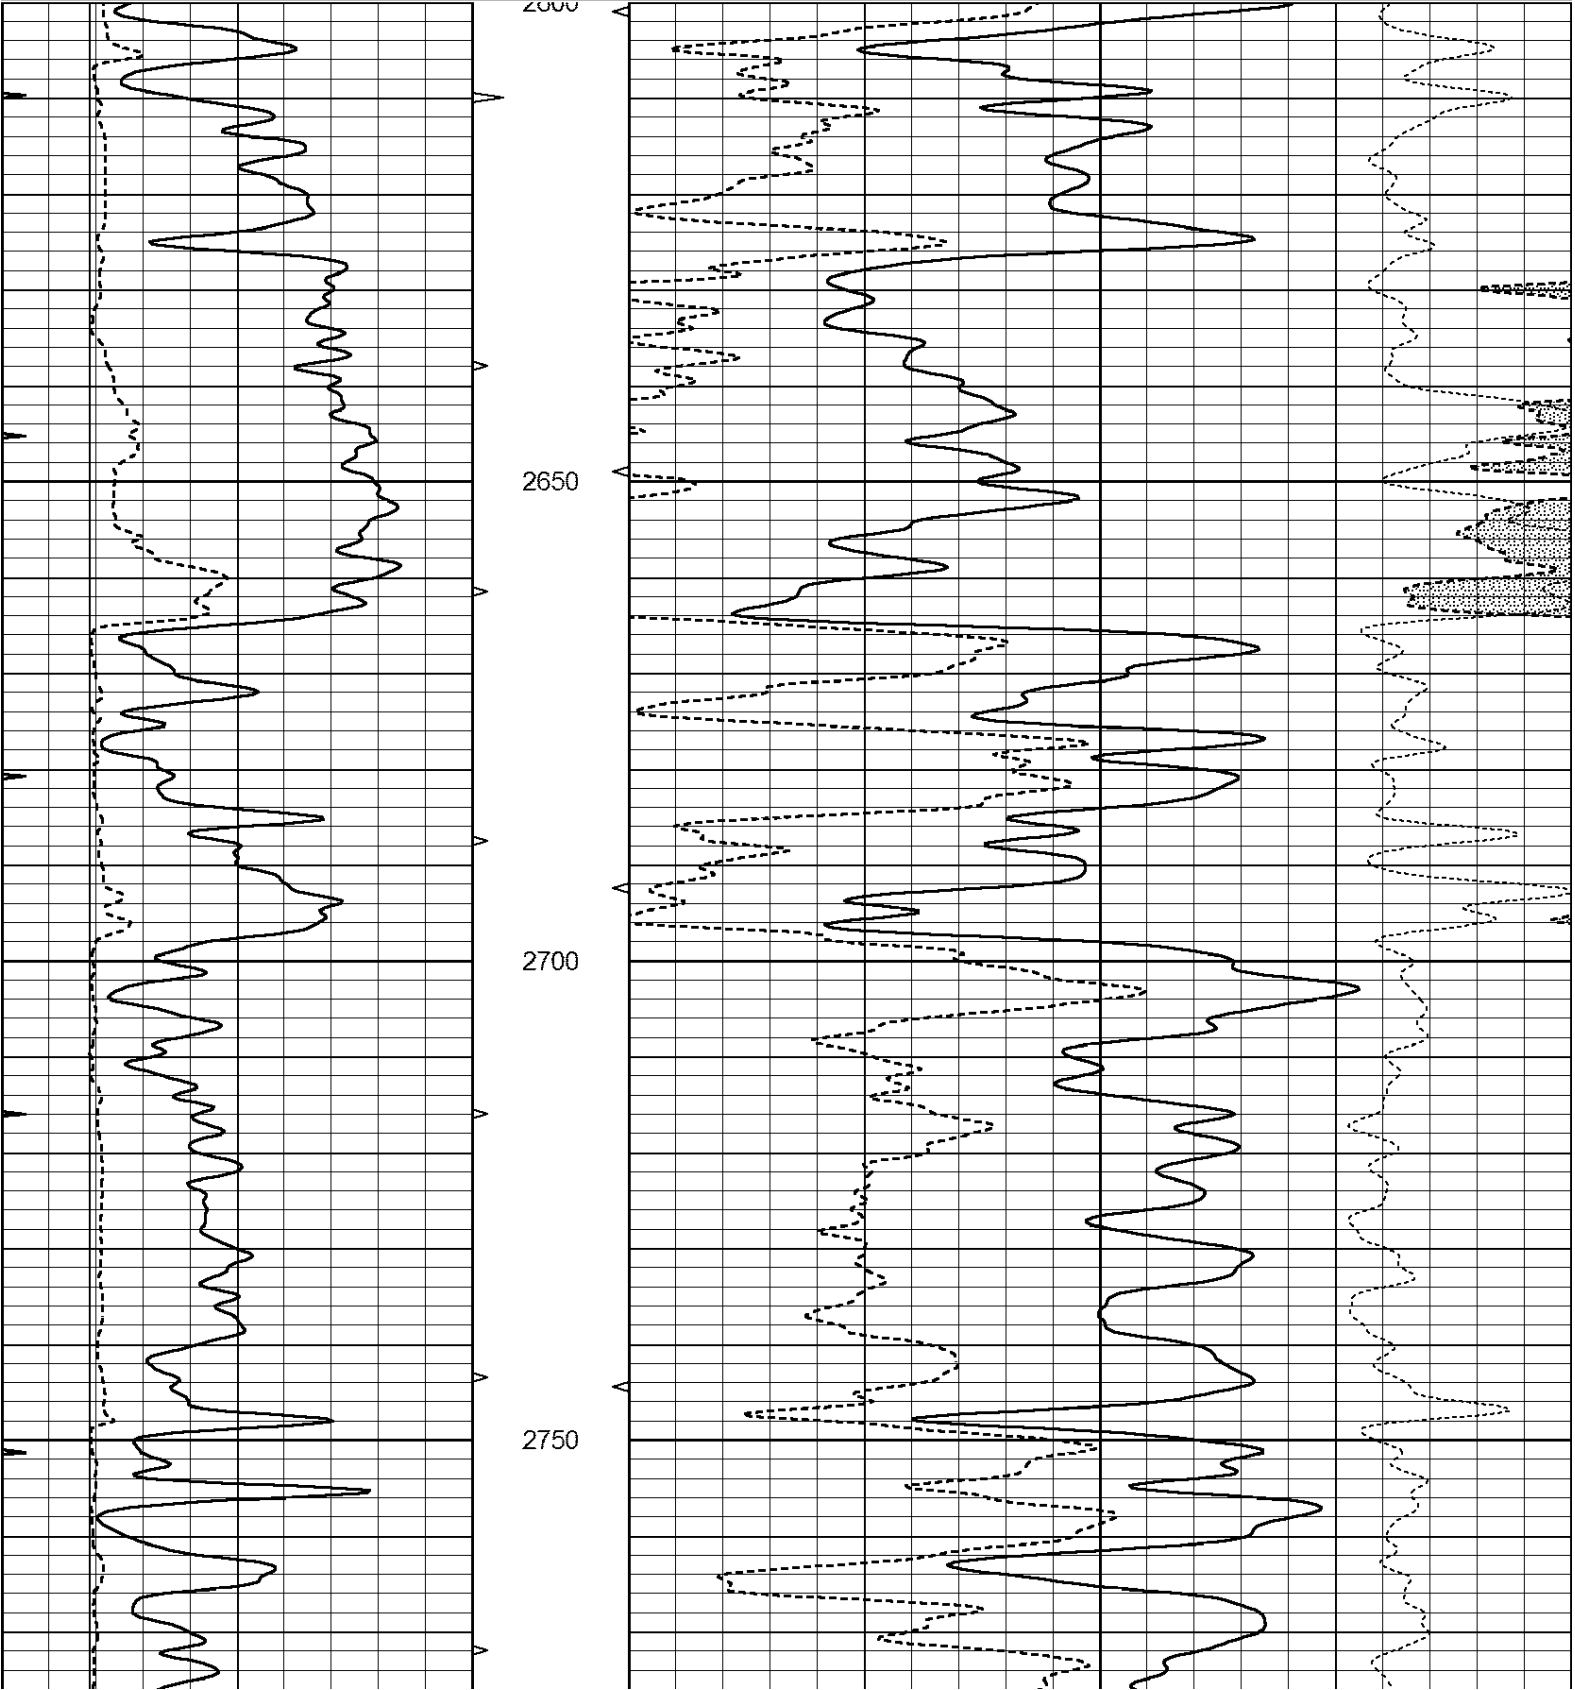

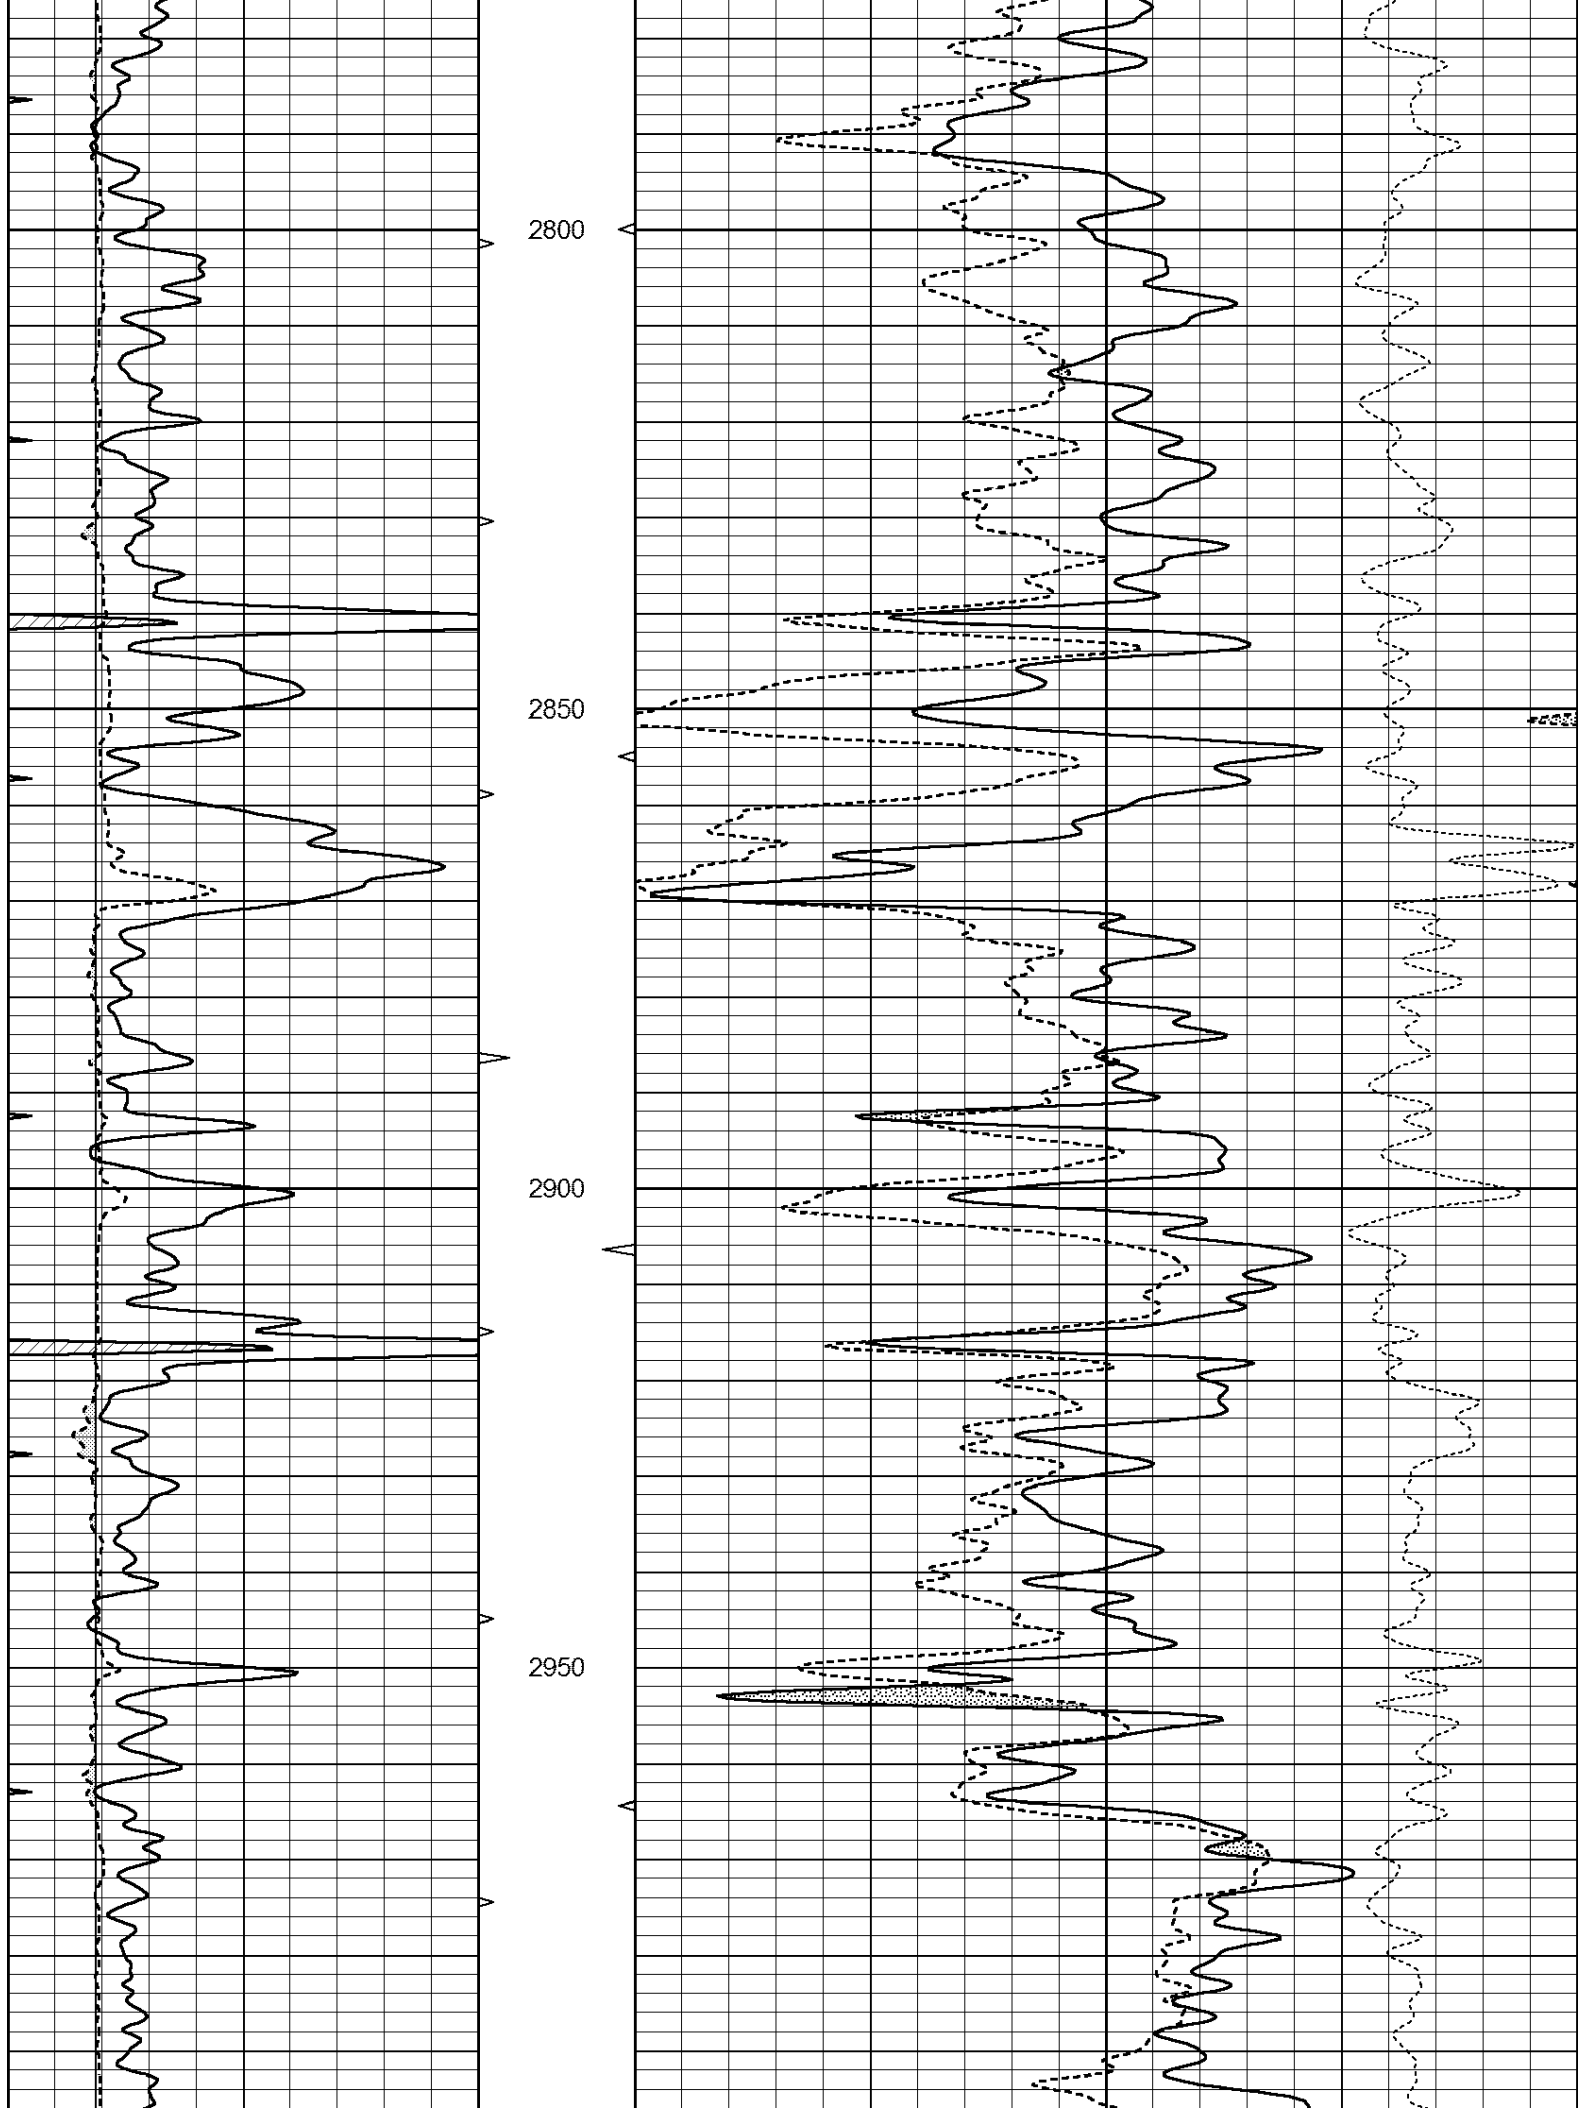

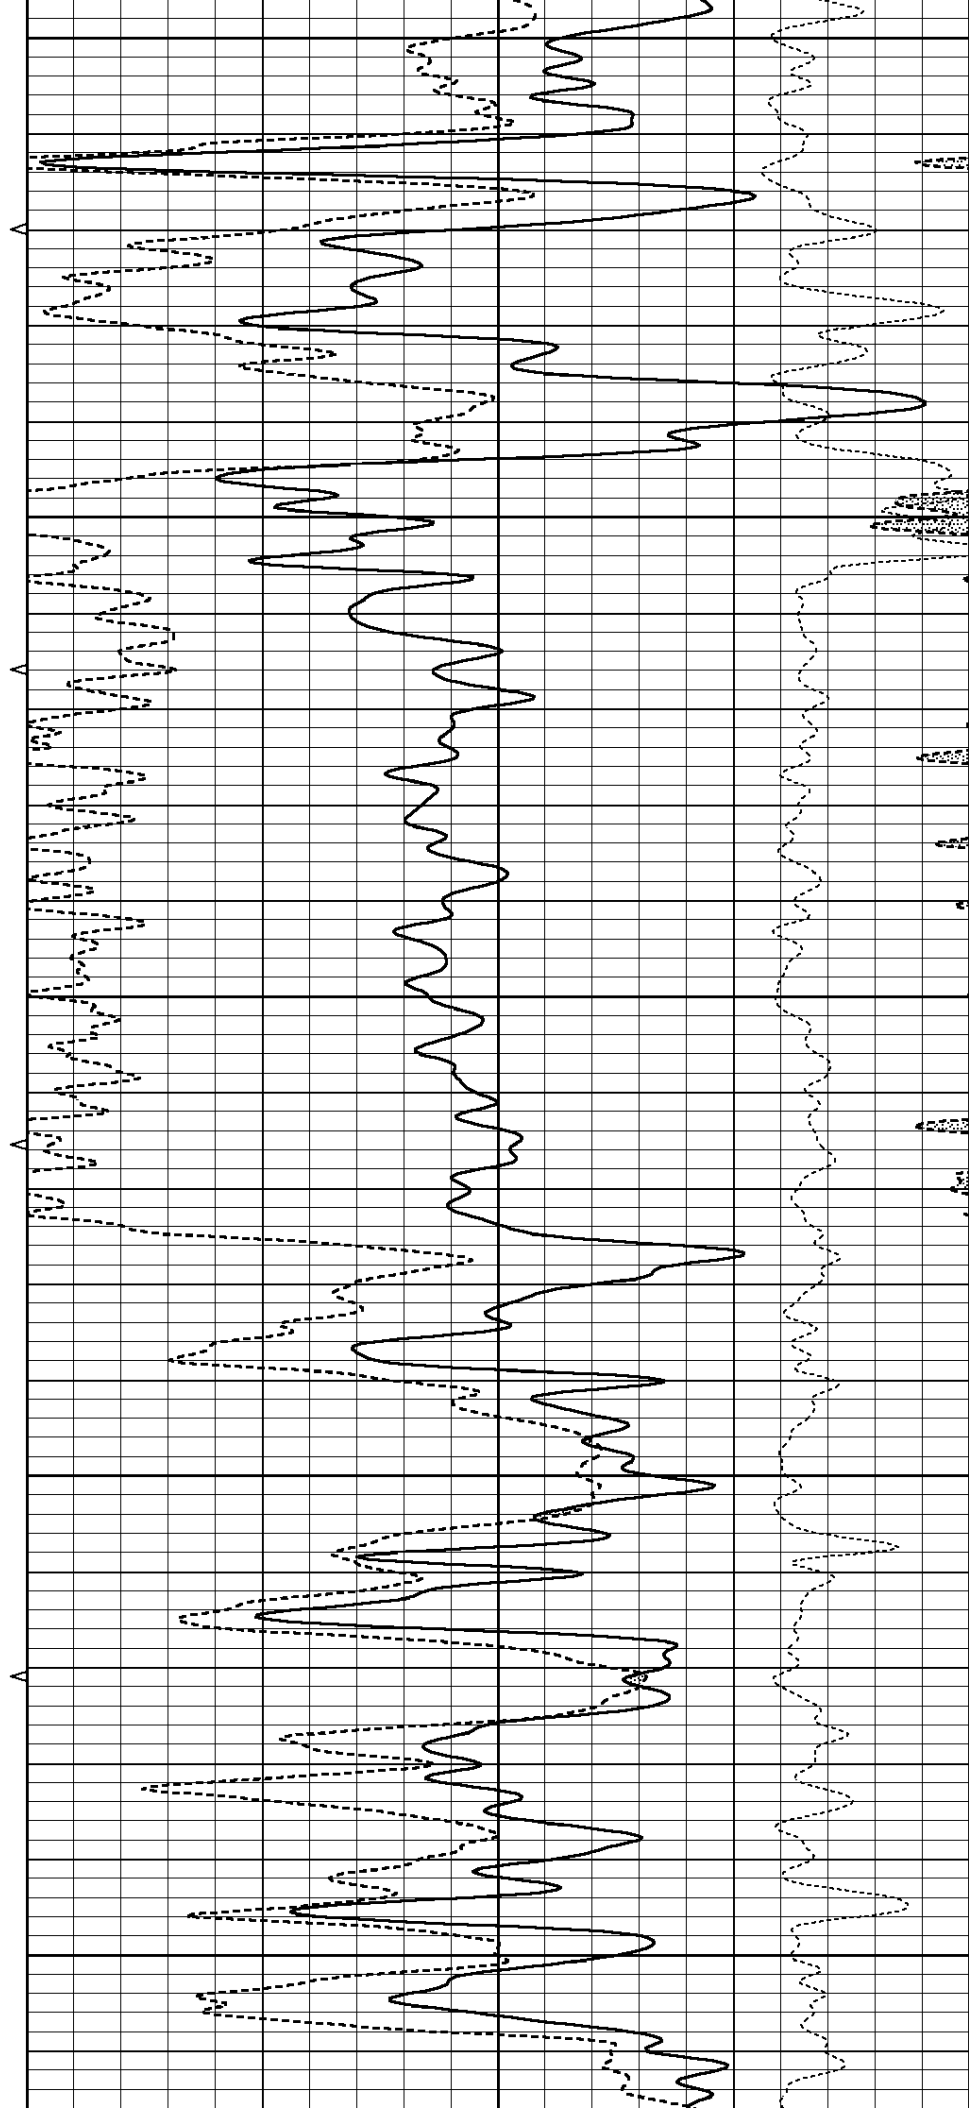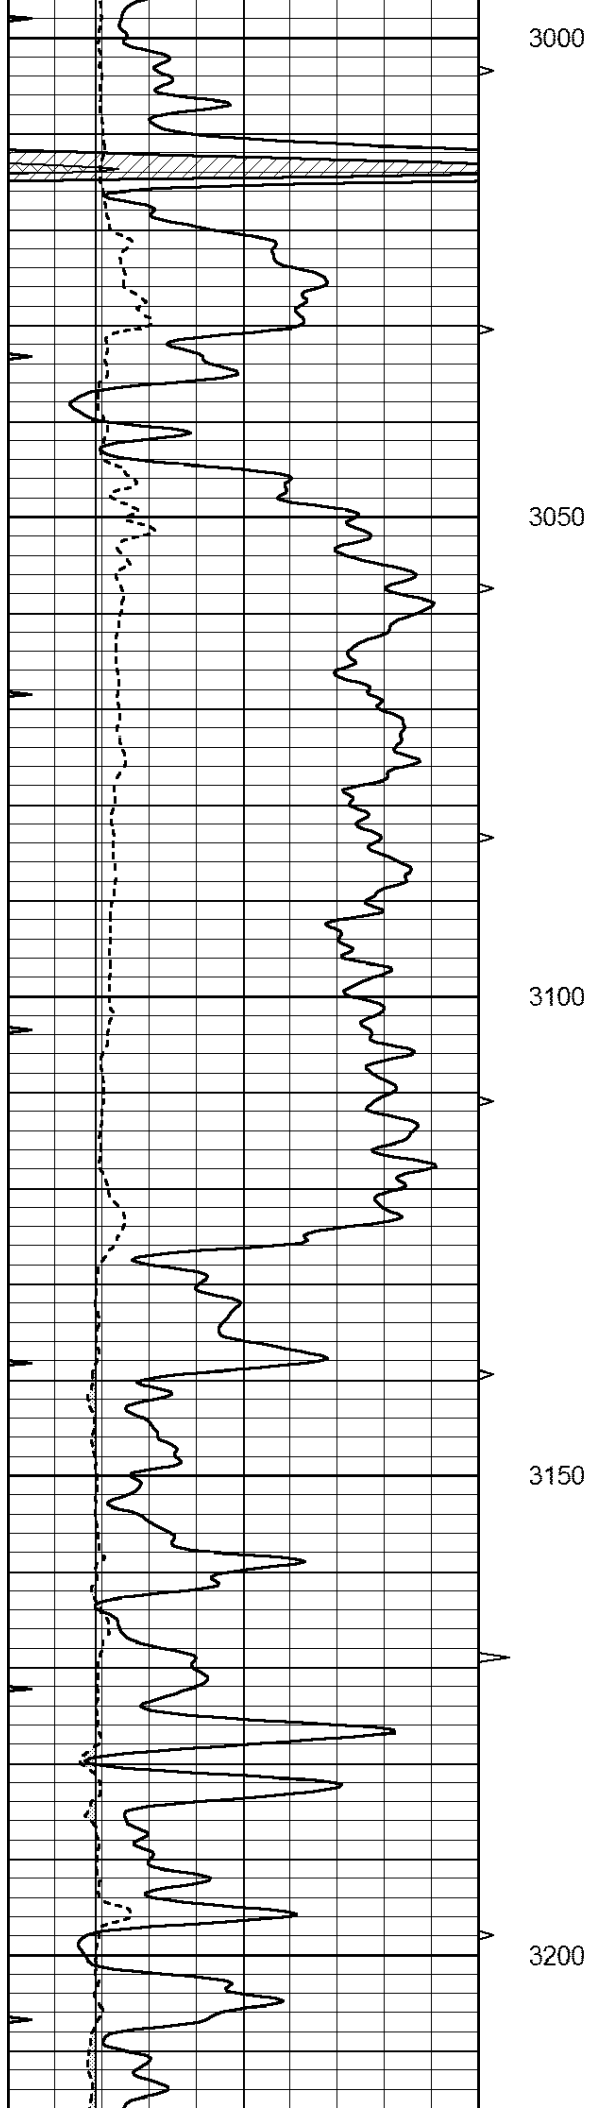

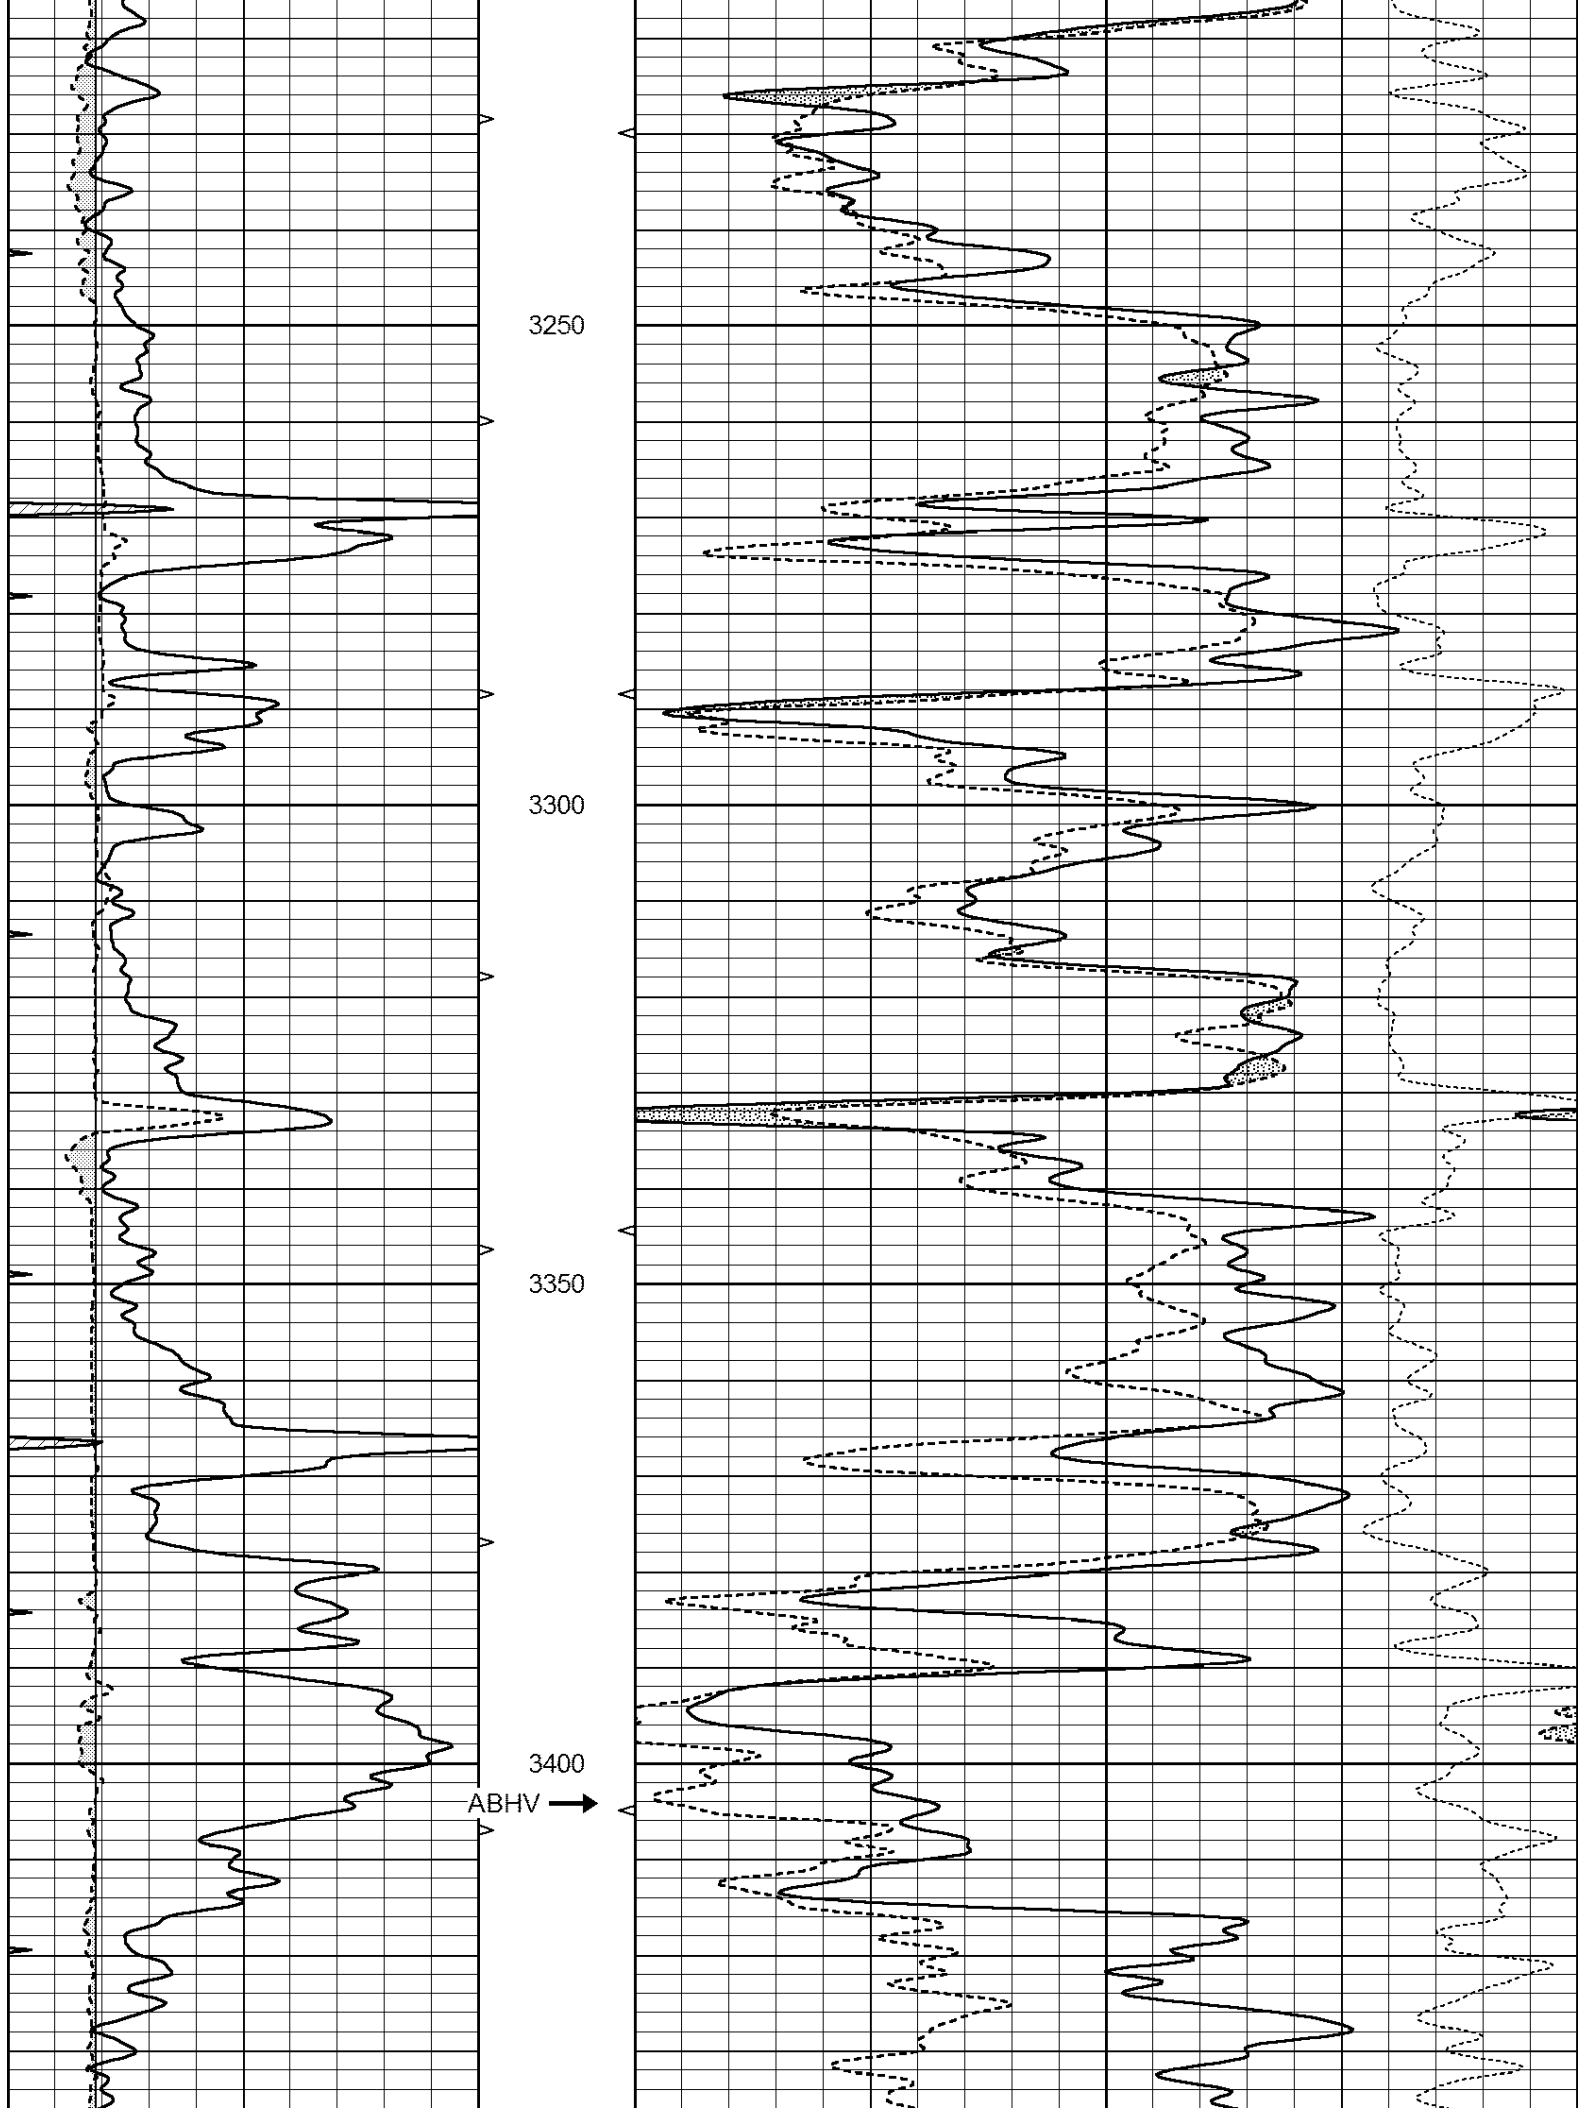


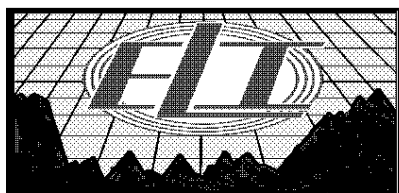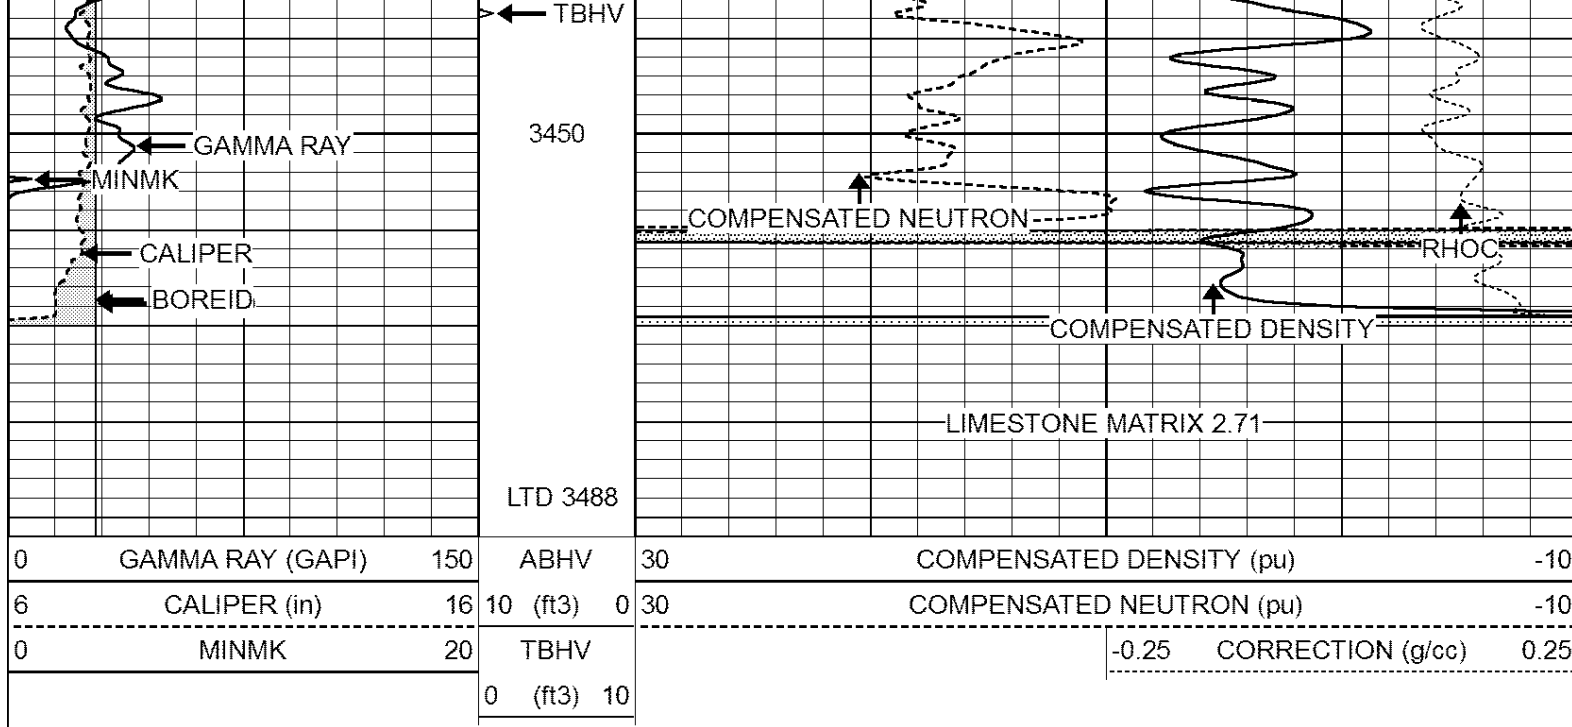


REPEAT SECTION

Database File: 2700pe.db
 Dataset Pathname: pass2.1
 Presentation Format: den_neu
 Dataset Creation: Wed Aug 08 08:43:13 2018 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10			

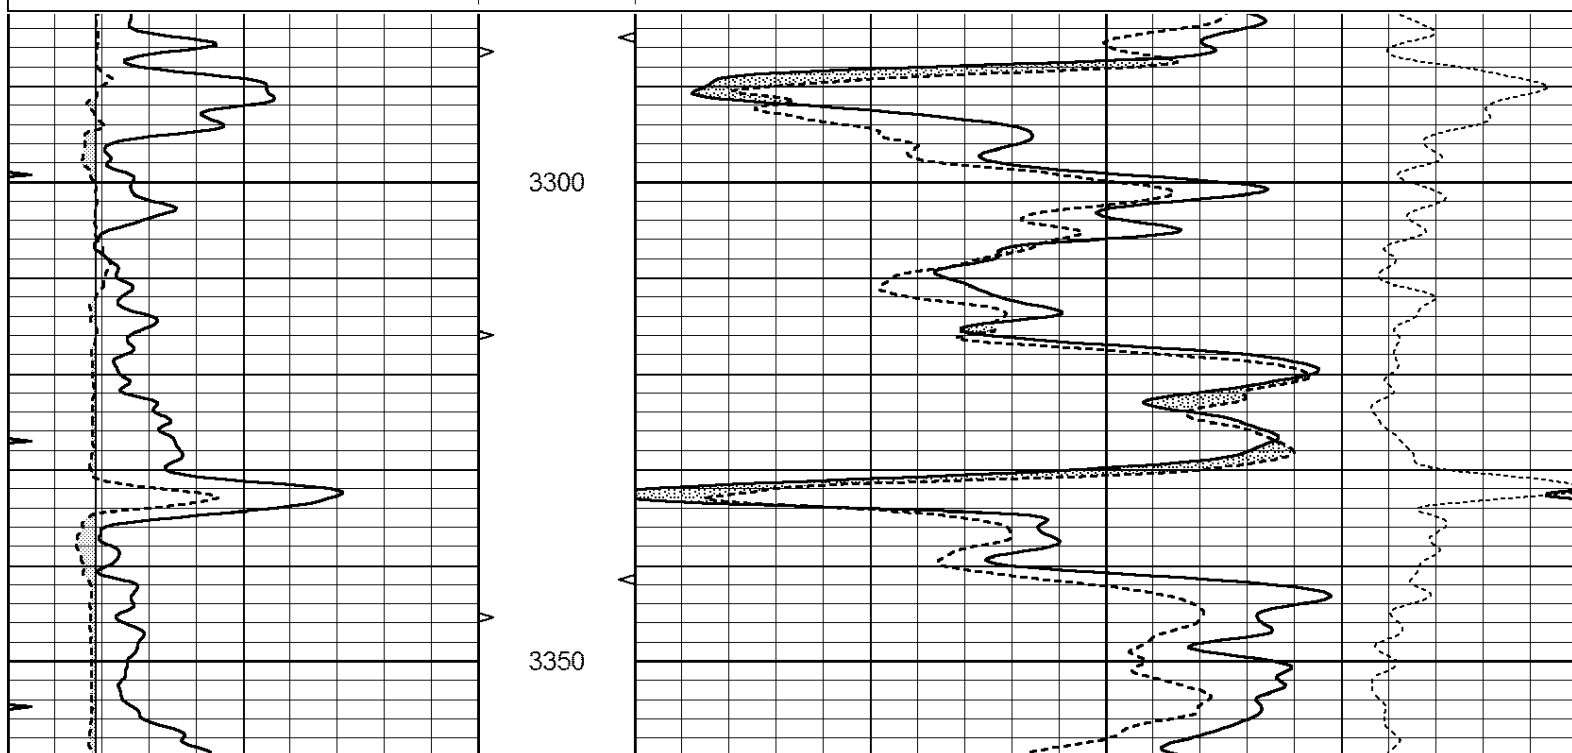

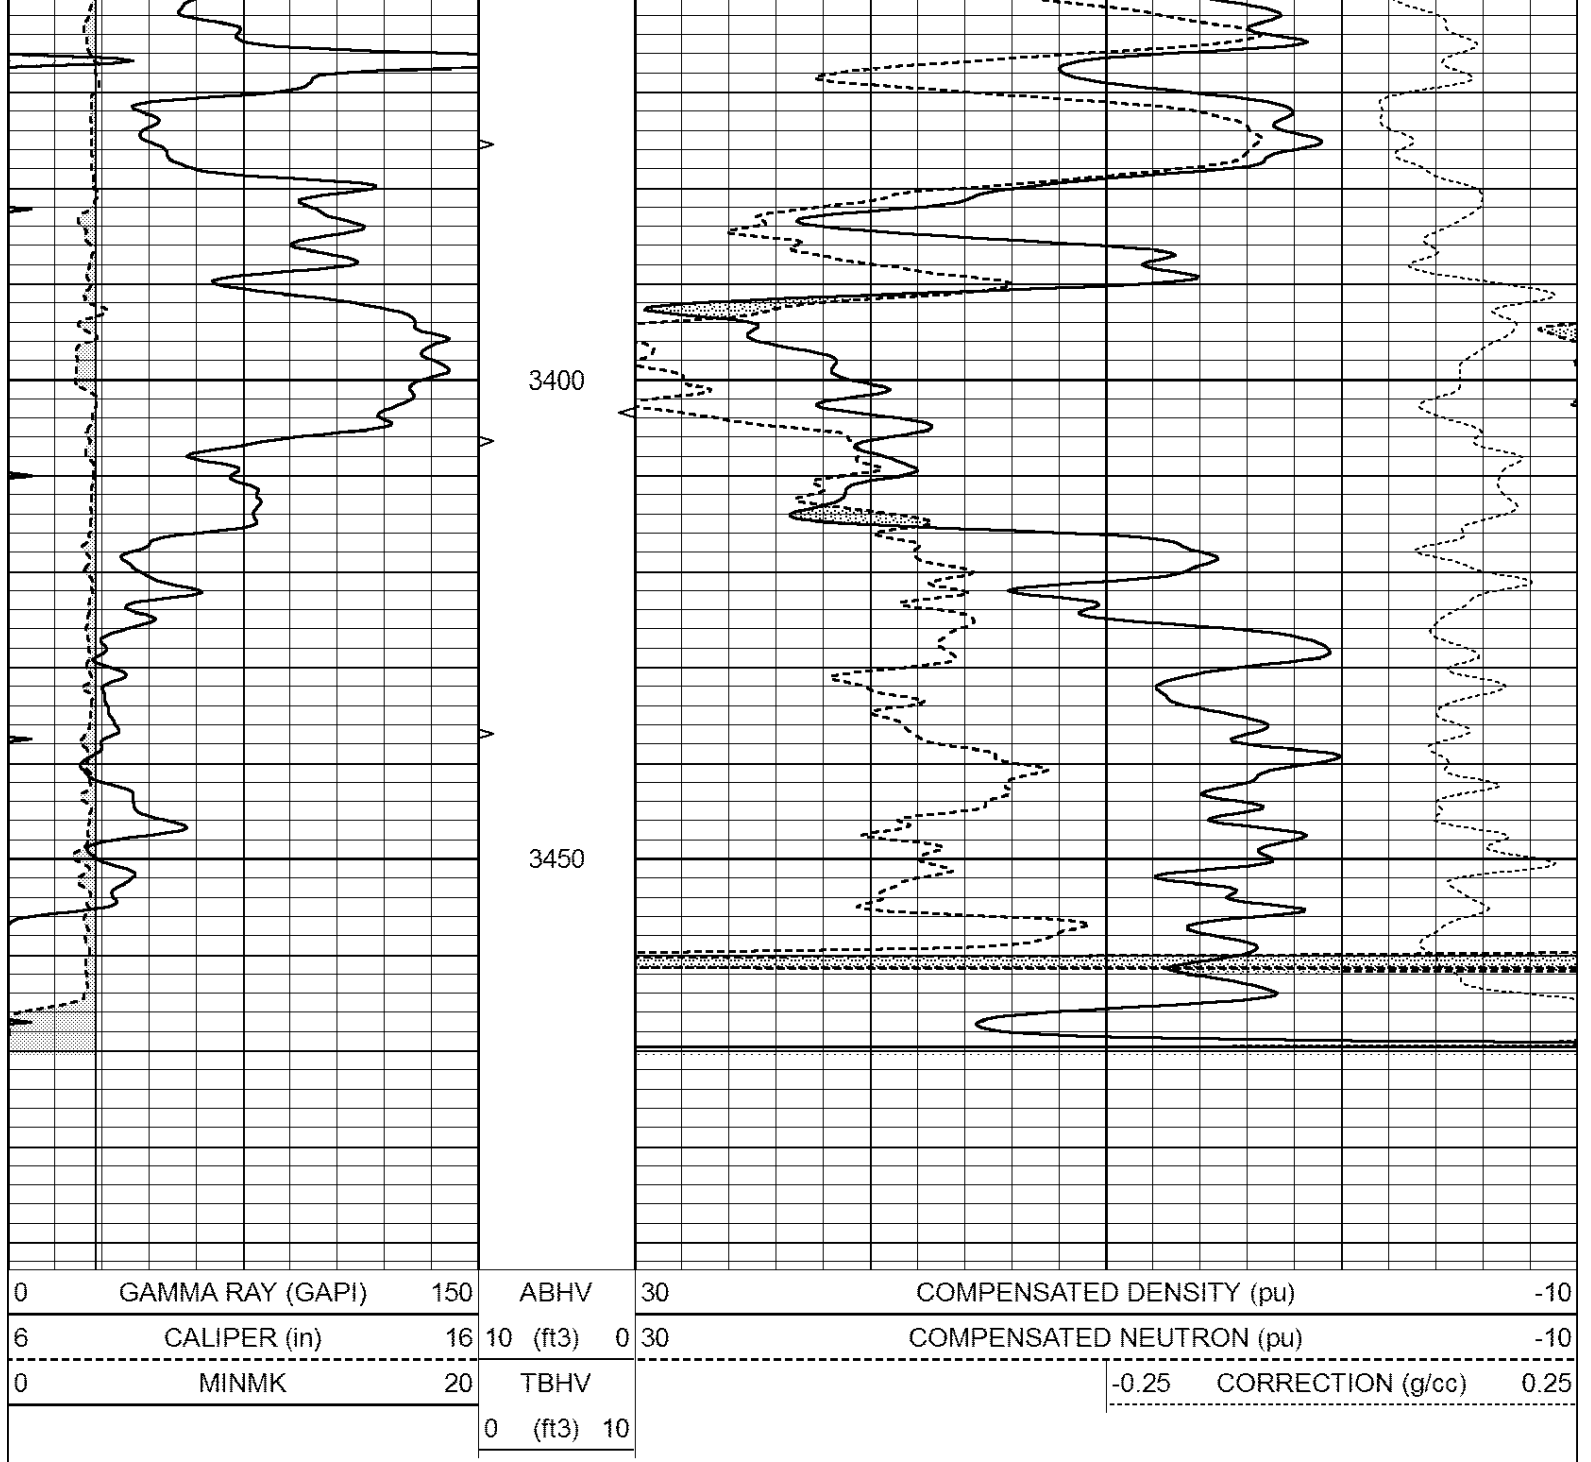

Calibration Report

Database File: pe2.db
Dataset Pathname: pass2
Dataset Creation: Mon Aug 21 11:58:02 2017 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
Surface Cal Performed: Mon Aug 21 11:58:18 2017
Downhole Cal Performed: Mon Aug 21 11:58:21 2017
After Survey Verification Performed: Mon Aug 21 11:58:23 2017

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000

Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739
Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		
After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		
Litho Density Calibration Report								
Serial: 002 Model: PRB								
Master Calibration			Performed Mon Aug 21 11:56:41 2017					
	Background	Magnesium		Aluminum		Sandstone		
Window 1	833.6	7394.2		2287.3		8111.8		cps
Window 2	768.9	6322.3		1995.6		6800.0		cps
Window 3	621.5	3261.9		1186.4		3380.9		cps
Window 4	184.2	185.7		184.9		184.8		cps
Long Space	0.0	5553.4		1226.6		6031.1		cps
Short Space	1.2	1307.5		903.9		1387.7		cps
Rho		1.7100		2.5900		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 46.3	Rib Slope	: 1.045	Density/Spine Ratio			: 0.566	
Spine Angle	: 76.3	Spine Slope	: 4.090	Spine Intercept			: -20.7	
Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		
After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps

Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	6l
Tool Model:	G

CALIBRATION						
Detector		Readings		Target		Normalization
Short Space		1.00	cps	1.00	cps	1.0000
Long Space		1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION						
Detector		Readings		Measured		Target
1)	Short Space		cps			
	Long Space		cps	pu		pu
2)	Short Space		cps			
	Long Space		cps	pu		
3)	Short Space		cps			
	Long Space		cps	pu		

POST-SURVEY VERIFICATION						
Detector		Readings		Measured		Target
1)	Short Space		cps			
	Long Space		cps	pu		pu
2)	Short Space		cps			
	Long Space		cps	pu		pu
3)	Short Space		cps			
	Long Space		cps	pu		pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Mon Aug 21 11:59:01 2017	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5500	GAPI/cps